



Java Short Hand If...Else (Ternary Operator)

[< Previous](#)[Next >](#)

Short Hand If...Else

There is also a short-hand if else, which is known as the **ternary operator** because it consists of three operands.

It can be used to replace multiple lines of code with a single line, and is most often used to replace simple if else statements:

Syntax

```
variable = (condition) ? expressionTrue : expressionFalse;
```

Instead of writing:

Example

```
int time = 20;
if (time < 18) {
    System.out.println("Good day.");
} else {
    System.out.println("Good evening.");
}
```

Try it Yourself »

You can simply write:

Example

```
int time = 20;
String result = (time < 18) ? "Good day." : "Good evening.";
System.out.println(result);
```

Try it Yourself »

Test Yourself With Exercises

Exercise:

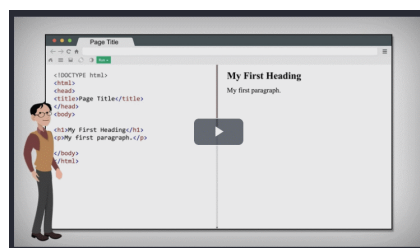
Insert the missing parts to complete the following "short hand if...else" statement:

```
int time = 20;
String result =    time < 18    "Good day."    "Good evening.";
System.out.println(result);
```



[Submit Answer »](#)[Start the Exercise](#)[◀ Previous](#)[Next ▶](#)**NEW**

We just launched
W3Schools videos

[Explore now](#)**COLOR PICKER**



Get certified
by completing
a Java
course today!



Get started

CODE GAME



Play Game



[Report Error](#)

[Spaces](#)

[Pro](#)

[Buy Certificate](#)

Top Tutorials

- [HTML Tutorial](#)
- [CSS Tutorial](#)
- [JavaScript Tutorial](#)
- [How To Tutorial](#)
- [SQL Tutorial](#)
- [Python Tutorial](#)
- [W3.CSS Tutorial](#)
- [Bootstrap Tutorial](#)
- [PHP Tutorial](#)
- [Java Tutorial](#)
- [C++ Tutorial](#)
- [jQuery Tutorial](#)

Top References

- [HTML Reference](#)
- [CSS Reference](#)
- [JavaScript Reference](#)
- [SQL Reference](#)
- [Python Reference](#)
- [W3.CSS Reference](#)
- [Bootstrap Reference](#)
- [PHP Reference](#)
- [HTML Colors](#)
- [Java Reference](#)
- [Angular Reference](#)
- [jQuery Reference](#)

Top Examples

- [HTML Examples](#)
- [CSS Examples](#)
- [JavaScript Examples](#)
- [How To Examples](#)
- [SQL Examples](#)
- [Python Examples](#)
- [W3.CSS Examples](#)
- [Bootstrap Examples](#)
- [PHP Examples](#)
- [Java Examples](#)

[XML Examples](#)

[jQuery Examples](#)

Get Certified

[HTML Certificate](#)

[CSS Certificate](#)

[JavaScript Certificate](#)

[Front End Certificate](#)

[SQL Certificate](#)

[Python Certificate](#)

[PHP Certificate](#)

[jQuery Certificate](#)

[Java Certificate](#)

[C++ Certificate](#)

[C# Certificate](#)

[XML Certificate](#)

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.
W3Schools is Powered by W3.CSS.

