



Java OOP

[< Previous](#)[Next >](#)

Java - What is OOP?

OOP stands for **Object-Oriented Programming**.

Procedural programming is about writing procedures or methods that perform operations on the data, while object-oriented programming is about creating objects that contain both data and methods.

Object-oriented programming has several advantages over procedural programming:

- OOP is faster and easier to execute
- OOP provides a clear structure for the programs
- OOP helps to keep the Java code DRY "Don't Repeat Yourself", and makes the code easier to maintain, modify and debug
- OOP makes it possible to create full reusable applications with less code and shorter development time

Tip: The "Don't Repeat Yourself" (DRY) principle is about reducing the repetition of code. You should extract out the codes that are common for the application, and place them at a single place and reuse them instead of repeating it.

Java - What are Classes and Objects?

Classes and objects are the two main aspects of object-oriented programming.

Look at the following illustration to see the difference between class and objects:

class

Fruit

objects

Apple

Banana

Mango

Another example:

class

Car

objects

Volvo

Audi

Toyota

So, a class is a template for objects, and an object is an instance of a class.

When the individual objects are created, they inherit all the variables and methods from the class.


You will learn much more about classes and objects in the next chapter.

[< Previous](#)[Next >](#)

ADVERTISEMENT

NEW

We just launched
W3Schools videos

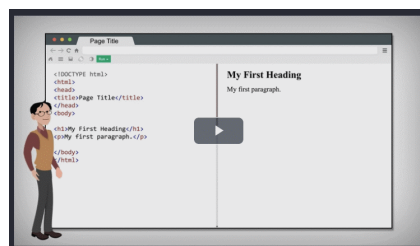

Explore now

COLOR PICKER



Get certified
by completing
a Java
course today!



Get started

CODE GAME



Play Game

ADVERTISEMENT

ADVERTISEMENT



Report Error

Spaces

Pro

Buy Certificate

Top Tutorials

[HTML Tutorial](#)

[CSS Tutorial](#)

[JavaScript Tutorial](#)

[How To Tutorial](#)

[SQL Tutorial](#)

[Python Tutorial](#)

[W3.CSS Tutorial](#)

[Bootstrap Tutorial](#)

[PHP Tutorial](#)

[Java Tutorial](#)

[C++ Tutorial](#)

[jQuery Tutorial](#)

Top References

[HTML Reference](#)

[CSS Reference](#)

[JavaScript Reference](#)

[SQL Reference](#)

[Python Reference](#)

[W3.CSS Reference](#)

[Bootstrap Reference](#)

[PHP Reference](#)

[HTML Colors](#)

[Java Reference](#)

[Angular Reference](#)

[jQuery Reference](#)

Top Examples

[HTML Examples](#)

[CSS Examples](#)

[JavaScript Examples](#)

[How To Examples](#)

[SQL Examples](#)

[Python Examples](#)

[W3.CSS Examples](#)

[Bootstrap Examples](#)

[PHP Examples](#)

[Java Examples](#)

[XML Examples](#)

[jQuery Examples](#)

Get Certified

[HTML Certificate](#)

[CSS Certificate](#)

[JavaScript Certificate](#)

[Front End Certificate](#)

[SQL Certificate](#)

[Python Certificate](#)

[PHP Certificate](#)

[jQuery Certificate](#)

[Java Certificate](#)

[C++ Certificate](#)

[C# Certificate](#)

[XML Certificate](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.
W3Schools is Powered by W3.CSS.

