Step 1 supplies the banks and tail tokens (Example D.1).

(a) Step 2 + Step 3.1

Fix τ; choose source color 1

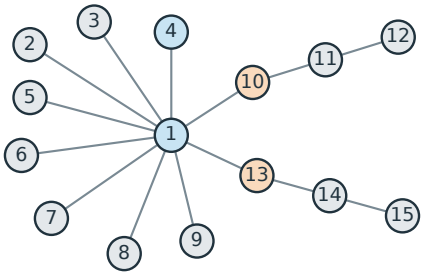

Blue: {1,4}; orange: {10,13}.

(b) Step 3.2

Column $\kappa = 1$

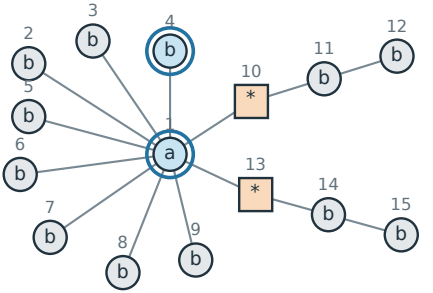

Sources: (a,b); readouts remain masked.

(c) Step 3.2

Column $\kappa = 2$

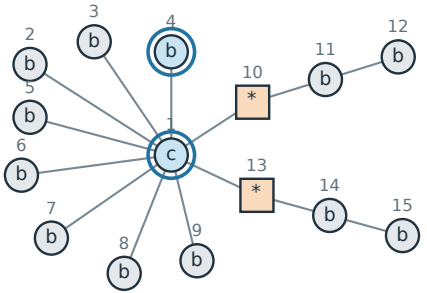

Sources: (c,b); position 4 uses its draft.

(d) Step 3.2

Tail column $\kappa = \mathrm{T}$

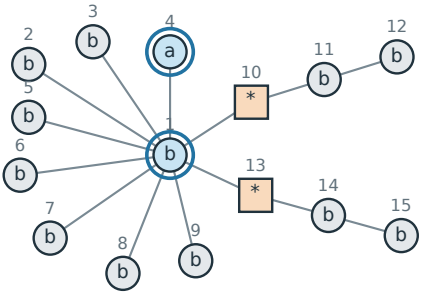

Sources: (b,a); other tokens stay fixed.

* = masked; 3 submitted states, each returning rows 10 and 13.

Fill always records the color under the same fixed coloring; no commit occurs.

The returned rows feed Step 3.3: votes and row selection.