(/)

Sele

Products & Docs

Discovery API

V 2.0 (/products-and-docs/apis/discovery-api/v2/)

The Ticketmaster Discovery API allows you to search for events, attractions, or venues.

Overview

Authentication

To run a successful API call, you will need to pass your API Key in the `apikey` query parameter. **Your API Key should automatically appear in all URLs throughout this portal**.

Example: `https://app.ticketmaster.com/discovery/v2/events.json?apikey=MwfxPFGzAgeDcuLb6xVIttyritKmS4D5`

Without a valid API Key, you will receive a `401` Status Code with the following response:

```
{
      "fault": {
            "faultstring": "Invalid ApiKey",
            "detail": {
                  "errorcode": "oauth.v2.InvalidApiKey"
            }
      }
}
```

Root URL

`https://app.ticketmaster.com/discovery/v2/`

Event Sources

The API provides access to content sourced from various platform, including **Ticketmaster**, **Universe**, **FrontGate Tickets** and **Ticketmaster Resale** (TMR). By default, the API returns events from all sources. To specify a specifc source(s), use the `&source=` parameter. Multiple, comma separated values are OK.

Event Coverage

With over 230K+ events available in the API, coverage spans different countries, including **United States**, **Canada**, **Mexico**, **Australia**, **New Zealand**, **United Kingdom**, **Ireland**, other European countries, and more. More events and more countries are added on continuous basis.

Rate Limits

- The default quota is 5000 API calls per day and rate limitation of 5 requests per second.
- Deep Paging: we only support retrieving the 1000th item. i.e. (size * page < 1000)

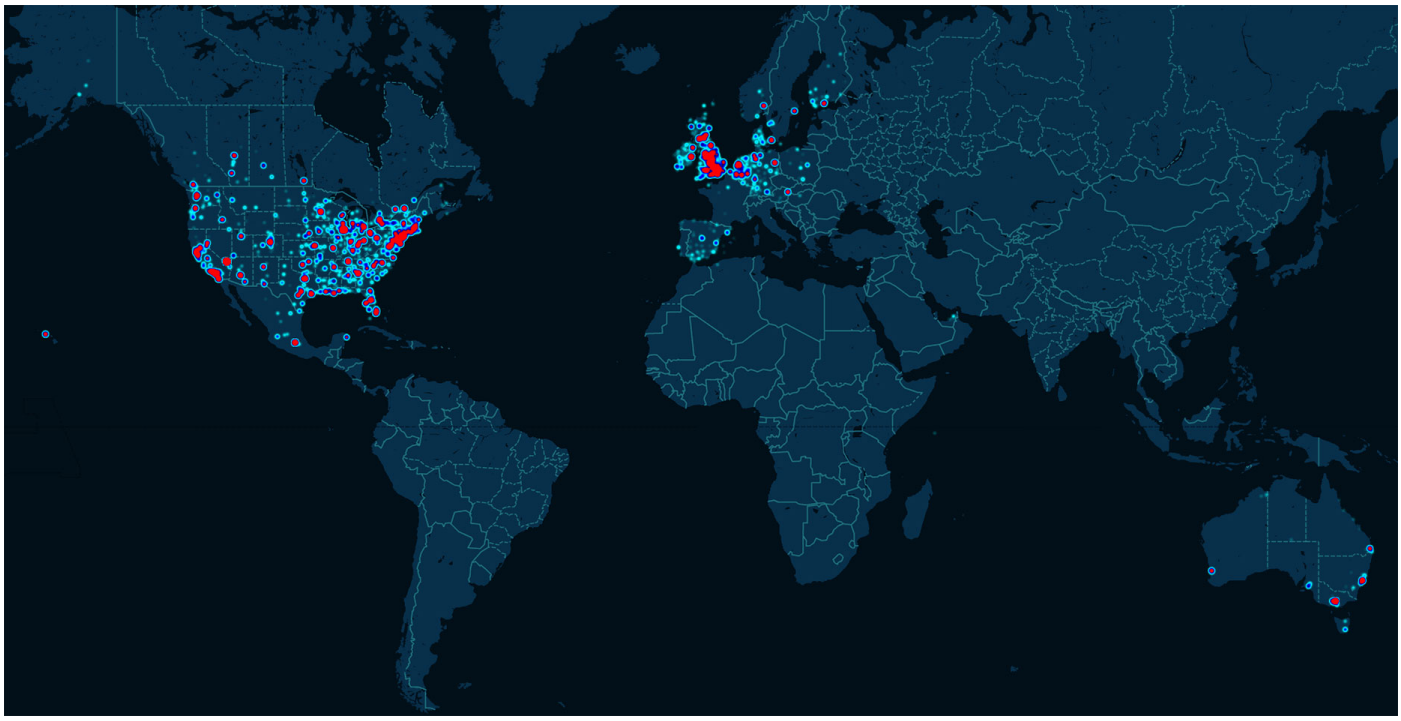

Examples

Get a list of all events in the United States

https://app.ticketmaster.com/discovery/v2/events.json?countryCode=US&apikey=MwfxPFGzAgeDcuLb6xVIttyritKmS4D5

Search for events sourced by Universe in the United States with keyword "devjam"

https://app.ticketmaster.com/discovery/v2/events.json?keyword=devjam&source=universe&countryCode=US&apikey=MwfxPFGzAgeDcuLb6xVIttyritKmS4D5

Search for music events in the Los Angeles area

https://app.ticketmaster.com/discovery/v2/events.json?classificationName=music&dmaId=324&apikey=MwfxPFGzAgeDcuLb6xVIttyritKmS4D5

Get a list of all events for Adele in Canada

https://app.ticketmaster.com/discovery/v2/events.json?attractionId=K8vZ917Gku7&countryCode=CA&apikey=MwfxPFGzAgeDcuLb6xVItty

ritKmS4D5

V2

get	**/discovery/v2/suggest**	Find Suggest	Find search suggestions and filter your suggestions by location, source, etc.

Default

get	**/discovery/v2/attractions**	Find attractions (artists, sports, packages, plays and so on) and filter your search by name, and much more.
get	**/discovery/v2/attractions/{id}**	Get details for a specific attraction using the unique identifier for the attraction.
get	**/discovery/v2/classifications**	Find classifications and filter your search by name, and much more. Classifications help define the nature of attractions and events.
get	**/discovery/v2/classifications/genres/{id}**	Get details for a specific genre using its unique identifier.

FEEDBACK

get	**/discovery/v2/classifications/segments/{id}**	Get details for a specific segment using its unique identifier.
get	**/discovery/v2/classifications/subgenres/{id}**	Get details for a specific sub-genre using its unique identifier.
get	**/discovery/v2/classifications/{id}**	Get details for a specific segment, genre, or sub-genre using its unique identifier.
get	**/discovery/v2/events**	Find events and filter your search by location, date, availability, and much more.
get	**/discovery/v2/events/{id}**	Get details for a specific event using the unique identifier for the event. This includes the venue and location, the attraction(s), and the Ticketmaster Website URL for purchasing tickets for the event.
get	**/discovery/v2/events/{id}/images**	Get images for a specific event using the unique identifier for the event.
get	**/discovery/v2/venues**	Find venues and filter your search by name, and much more.

get	**/discovery/v2/venues/{id}**	Get details for a specific venue using the unique identifier for the venue.

Event Search

Method: GET

Summary: Event Search

Description: Find events and filter your search by location, date, availability, and much more.

`/discovery/v2/events`

Query parameters:

Parameter	Description	Type
`id`	Filter entities by its id	String
`keyword`	Keyword to search on	String
`attractionId`	Filter by attraction id	String
`venueId`	Filter by venue id	String
`postalCode`	Filter by postal code / zipcode	String

`latlong`	Filter events by latitude and longitude, this filter is deprecated and maybe removed in a future release, please use geoPoint instead	String
`radius`	Radius of the area in which we want to search for events.	String
`unit`	Unit of the radius	String enum: ["miles", "km"]
`source`	Filter entities by its primary source name OR publishing source name	String enum: ["ticketmaster", " universe", " frontgate", " tmr"]
`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String
`marketId`	Filter by market id	String

startDateTime	Filter with a start date after this date	String
endDateTime	Filter with a start date before this date	String
includeTBA	yes, to include with date to be announce (TBA)	String enum: ["yes", " no", " only"]
includeTBD	yes, to include with a date to be defined (TBD)	String enum: ["yes", " no", " only"]
includeTest	Yes if you want to have entities flag as test in the response. Only, if you only wanted test entities	String enum: ["yes", " no", " only"]
size	Page size of the response	String
page	Page number	String
	Sorting order of the search result. Allowable values : 'name,asc', 'name,desc', 'date,asc', 'date,desc', 'relevance,asc', 'relevance,desc',	

`sort`	'distance,asc', 'name,date,asc', 'name,date,desc', 'date,name,asc', 'date,name,desc', 'distance,date,asc', 'onSaleStartDate,asc', 'id,asc', 'venueName,asc', 'venueName,desc', 'random'	String
`onsaleStartDateTime`	Filter with onsale start date after this date	String
`onsaleEndDateTime`	Filter with onsale end date before this date	String
`city`	Filter by city	Array
`countryCode`	Filter by country code	String
`stateCode`	Filter by state code	String
`classificationName`	Filter by classification name: name of any segment, genre, sub-genre, type, sub-type. Negative filtering is supported by using the following format '-'. Be aware that negative filters may cause decreased performance.	Array

classificationId	Filter by classification id: id of any segment, genre, sub-genre, type, sub-type. Negative filtering is supported by using the following format '-'. Be aware that negative filters may cause decreased performance.	Array
dmaId	Filter by dma id	String
localStartDateTime	Filter with event local start date time within this range	Array
localStartEndDateTime	Filter event where event local start and end date overlap this range	Array
startEndDateTime	Filter event where event start and end date overlap this range	Array
publicVisibilityStartDateTime	Filter with events with public visibility starting	Array
preSaleDateTime	Filter events with a presaleFilterTransformer start and end that intersects with this range	Array

onsaleOnStartDate	Filter with onsale start date on this date	String
onsaleOnAfterStartDate	Filter with onsale range within this date	String
collectionId	Filter by collection id	Array
segmentId	Filter by segment id	Array
segmentName	Filter by segment name	Array
includeFamily	Filter by classification that are family-friendly	String enum: ["yes", " no", " only"]
promoterId	Filter by promoter id	String
genreId	Filter by genreId	Array
subGenreId	Filter by subGenreId	Array
typeId	Filter by typeId	Array
subTypeId	Filter by subTypeId	Array
geoPoint	filter events by geoHash	String
preferredCountry	Popularity boost by country, default is us.	String enum: ["us", " ca"]
	yes, to include spell	

includeSpellcheck	check suggestions in the response.	String enum: ["yes", " no"]
domain	Filter entities based on domains they are available on	Array

Response structure:

200 - successful operation

_links (object) - links to data sets

_embedded (object) - container

page (object) - information about current page in data source

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/events.json?size=1&a
tKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/events.json?apikey=MwfxPFGzAgeDcuLb6xVIttyritKmS4
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Get Event Details

Method: GET

Summary: Get Event Details

Description: Get details for a specific event using the unique identifier for the event. This includes the venue and location, the attraction(s), and the Ticketmaster Website URL for purchasing tickets for the event.

`/discovery/v2/events/{id}`

URL parameters:

Parameter	Description	Type	Default Value	Required
`id` *	ID of the event	String		Yes

Query parameters:

Parameter	Description	Type	Default Value	Required
`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	*	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`_embedded` (object) - container

`type` (string) - Type of the entity

`distance` (number) - double

`units` (string) - No description specified

`location` (object) - No description specified

`id*` (string) - Unique id of the entity in the discovery API

`locale` (string) - Locale in which the content is returned

`name` (string) - Name of the entity

`description` (string) - Description's of the entity

`additionalInfo` (string) - Additional information of the entity

`url` (string) - URL of a web site detail page of the entity

`images` (array) - Images of the entity

`dates` (object) - Event's dates information

`sales` (object) - Event's sales dates information

`info` (string) - Any information related to the event

`pleaseNote` (string) - Any notes related to the event

`priceRanges` (array) - Price ranges of this event

`promoter` (object) - Event's promoter

`promoters` (array) - Event's promoters

`outlets` (array) - Related outlets informations

`productType` (string) - Product type

`products` (array) - Related products informations

`seatmap` (object) - Event's seatmap

`accessibility` (object) - Additional information for people who experience disabilities

`ticketLimit` (object) - ticket limit

`classifications` (array) - Event's classifications

`place` (object) - Place has the information on where the event happens. It can be set if there is no venue

`externalLinks` (object) - List of external links

`test` (boolean) - Indicate if this is a test entity, by default test entities won't appear in discovery API

`aliases` (array) - List of aliases for entity

`localizedAliases` (object) - List of localized aliases for entity

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/events/G5diZfkn0B-bh
VIttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/events/G5diZfkn0B-bh.json?apikey=MwfxPFGzAgeDcuLb
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Get Event Images

Method: GET

Summary: Get Event Images

Description: Get images for a specific event using the unique identifier for the event.

`/discovery/v2/events/{id}/images`

URL parameters:

Parameter	Description	Type	Default Value	Required
`id *`	ID of the event	String		Yes

Query parameters:

Parameter	Description	Type	Default Value	Required
`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	*	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`type*` (string) - Type of the entity

`id*` (string) - Unique id of the entity in the discovery API

`images` (array) - Images of the entity

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/events/k7vGFKzleBdwS
DcuLb6xVIttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/events/0B004F0401BD55E5/images.json?apikey=MwfxPF
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Attraction Search

Method: GET

Summary: Attraction Search

Description: Find attractions (artists, sports, packages, plays and so on) and filter your search by name, and much more.

`/discovery/v2/attractions`

Query parameters:

Parameter	Description	Type	Default Value	Re
`id`	Filter entities by its id	String		No
`keyword`	Keyword to search on	String		No
	Filter entities by its primary	String enum: ["ticketmaster",		

source	source name OR publishing source name	" universe", " frontgate", " tmr"]		No
locale	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	en	No
includeTest	Yes if you want to have entities flag as test in the response. Only, if you only wanted test entities	String enum: ["yes", " no", " only"]	no	No
size	Page size of the response	String	20	No

page	Page number	String	0	No
`sort`	Sorting order of the search result. Allowable Values : 'name,asc', 'name,desc', 'relevance,asc', 'relevance,desc', 'random'	String	relevance,desc	No
`classificationName`	Filter attractions by classification name: name of any segment, genre, sub-genre, type, sub-type	Array		No
`classificationId`	Filter attractions by classification id: id of any segment, genre, sub-genre, type, sub-type	Array		No
`includeFamily`	Filter by classification that are family-friendly	String enum: ["yes", " no", " only"]	yes	No

segmentId	Filter attractions by segmentId	Array		No
genreId	Filter attractions by genreId	Array		No
subGenreId	Filter attractions by subGenreId	Array		No
typeId	Filter attractions by typeId	Array		No
subTypeId	Filter attractions by subTypeId	Array		No
preferredCountry	Popularity boost by country, default is us.	String enum: ["us", " ca"]	us	No
includeSpellcheck	yes, to include spell check suggestions in the response.	String enum: ["yes", " no"]	no	No
domain	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`_embedded` (object) - container

`page` (object) - information about current page in data source

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/attractions.json?ap
mS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/attractions.json?size=1&apikey=MwfxPFGzAgeDcuLb6x
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Get Attraction Details

Method: GET

Summary: Get Attraction Details

Description: Get details for a specific attraction using the unique identifier for the attraction.

`/discovery/v2/attractions/{id}`

URL parameters:

Parameter	Description	Type	Default Value	Required
`id` *	ID of the attraction	String		Yes

Query parameters:

Parameter	Description	Type	Default Value	Required

`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	*	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`type` (string) - Type of the entity

`id*` (string) - Unique id of the entity in the discovery API

`locale` (string) - Locale in which the content is returned

`name` (string) - Name of the entity

`description` (string) - Description's of the entity

`additionalInfo` (string) - Additional information of the entity

`url` (string) - URL of a web site detail page of the entity

`images` (array) - Images of the entity

`classifications` (array) - Attraction's classifications

`externalLinks` (object) - List of external links

`test` (boolean) - Indicate if this is a test entity, by default test entities won't appear in discovery API

`aliases` (array) - List of aliases for entity

`localizedAliases` (object) - List of localized aliases for entity

`upcomingEvents` (object) - number of upcoming events

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/attractions/K8vZ9175
b6xVIttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/attractions/K8vZ9175BhV.json?apikey=MwfxPFGzAgeDc
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Classification Search

Method: GET

Summary: Classification Search

Description: Find classifications and filter your search by name, and much more. Classifications help define the nature of attractions and events.

`/discovery/v2/classifications`

Query parameters:

Parameter	Description	Type	Default Value	Required
`id`	Filter entities by its id	String		No
`keyword`	Keyword to search on	String		No
`source`	Filter entities by its primary source name OR publishing source name	String enum: ["ticketmaster", " universe", " frontgate", " tmr"]		No
	The locale in ISO code format. Multiple			

`locale`	comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	en	No
`includeTest`	Yes if you want to have entities flag as test in the response. Only, if you only wanted test entities	String enum: ["yes", " no", " only"]	no	No
`size`	Page size of the response	String	20	No
page	Page number	String	0	No
	Sorting order			

`sort`	of the search result	String	name,asc	No
`preferredCountry`	Popularity boost by country, default is us.	String enum: ["us", " ca"]	us	No
`includeSpellcheck`	yes, to include spell check suggestions in the response.	String enum: ["yes", " no"]	no	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`_embedded` (object) - container

page (object) - information about current page in data source

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/classifications.jsor
ritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/classifications.json?apikey=MwfxPFGzAgeDcuLb6xVIt
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Get Classification Details

Method: GET

Summary: Get Classification Details

Description: Get details for a specific segment, genre, or sub-genre using its unique identifier.

`/discovery/v2/classifications/{id}`

URL parameters:

Parameter	Description	Type	Default Value	Required
`id *`	ID of the segment, genre, or sub-genre	String		Yes

Query parameters:

Parameter	Description	Type	Default Value	Required
`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	*	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`segment` (object) - A Segment is a primary genre for an entity (Music, Sports, Arts, etc)

`primary` (boolean) - No description specified

`type` (object) - A Type represents a kind or group of people. (Donation, Group, Individual, Merchandise, Event Style, etc)

`subType` (object) - Secondary Type to further categorize an entity (Band, Choir, Chorus, etc)

`family` (boolean) - True if this is a family classification

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/classifications/KZFz
PFGzAgeDcuLb6xVIttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/classifications/KZFzniwnSyZfZ7v7nE?apikey=MwfxPFG
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Get Genre Details

Method: GET

Summary: Get Genre Details

Description: Get details for a specific genre using its unique identifier.

`/discovery/v2/classifications/genres/{id}`

URL parameters:

Parameter	Description	Type	Default Value	Required
`id` *	ID of the genre	String		Yes

Query parameters:

Parameter	Description	Type	Default	Required

			Value	
`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	*	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

- `_links` (object) - links to data sets
- `_embedded` (object) - container
- `subGenres` (array) - List of Tertiary Genre linked to the Secondary Genre
- `id` (string) - The ID of the classification's level
- `name` (string) - The Name of the classification's level
- `locale` (string) - Locale in which the content is returned

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/classifications/genr
PFGzAgeDcuLb6xVIttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/classifications/genres/KnvZfZ7vA71.json?apikey=Mw
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Get Segment Details

Method: GET

Summary: Get Segment Details

Description: Get details for a specific segment using its unique identifier.

`/discovery/v2/classifications/segments/{id}`

URL parameters:

Parameter	Description	Type	Default Value	Required
`id *`	ID of the segment	String		Yes

Query parameters:

Parameter	Description	Type	Default Value	Required
`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	*	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`_embedded` (object) - container for genres.

`id` (string) - The ID of the classification's level

`name` (string) - The Name of the classification's level

`locale` (string) - Locale in which the content is returned

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/classifications/segr
pikey=MwfxPFGzAgeDcuLb6xVIttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/classifications/segments/KZazBEonSMnZfZ7vFta.json
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Get Sub-Genre Details

Method: GET

Summary: Get Sub-Genre Details

Description: Get details for a specific sub-genre using its unique identifier.

`/discovery/v2/classifications/subgenres/{id}`

URL parameters:

Parameter	Description	Type	Default Value	Required
`id` *	ID of the subgenre	String		Yes

Query parameters:

Parameter	Description	Type	Default Value	Required

`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	*	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`id` (string) - The ID of the classification's level

name (string) - The Name of the classification's level

`locale` (string) - Locale in which the content is returned

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/classifications/subg
apikey=MwfxPFGzAgeDcuLb6xVIttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/classifications/subgenres/KZazBEonSMnZfZ7vFta.jso
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Venue Search

Method: GET

Summary: Venue Search

Description: Find venues and filter your search by name, and much more.

`/discovery/v2/venues`

Query parameters:

Parameter	Description	Type	Default Value	Req
`id`	Filter entities by its id	String		No
`keyword`	Keyword to search on	String		No
`latlong`	Filter events by latitude and longitude, this filter is deprecated and maybe removed in a future release, please use geoPoint instead	String		No
`radius`	Radius of the area in which we want to search for events.	String		No
	Unit of the	String enum:		

`unit`	radius	["miles", "km"]	miles	No
`source`	Filter entities by its primary source name OR publishing source name	String enum: ["ticketmaster", " universe", " frontgate", " tmr"]		No
`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	en	No
`includeTest`	Yes if you want to have entities flag as test in the response. Only, if you only wanted test	String enum: ["yes", " no", " only"]	no	No

	entities			
`size`	Page size of the response	String	20	No
`page`	Page number	String	0	No
`sort`	Sorting order of the search result. Allowable Values: 'name,asc', 'name,desc', 'relevance,asc', 'relevance,desc', 'distance,asc', 'distance,desc', 'random'	String	relevance,desc	No
`countryCode`	Filter venues by country code	String		No
`stateCode`	Filter venues by state / province code	String		No
`geoPoint`	filter events by geoHash	String		No
`preferredCountry`	Popularity boost by country, default is us.	String enum: ["us", " ca"]	us	No

`includeSpellcheck`	yes, to include spell check suggestions in the response.	String enum: ["yes", " no"]	no	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`_embedded` (object) - container

page (object) - information about current page in data source

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/venues.json?keyword=
ttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/venues.json?apikey=MwfxPFGzAgeDcuLb6xVIttyritKmS4
Host: app.ticketmaster.com
X-Target-URI: http://app.ticketmaster.com
Connection: Keep-Alive
```

Get Venue Details

Method: GET

Summary: Get Venue Details

Description: Get details for a specific venue using the unique identifier for the venue.

`/discovery/v2/venues/{id}`

URL parameters:

Parameter	Description	Type	Default Value	Required
`id *`	ID of the venue	String		Yes

Query parameters:

Parameter	Description	Type	Default Value	Required
`locale`	The locale in ISO code format. Multiple comma-separated values can be provided. When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	*	No
`domain`	Filter entities based on domains they are available on	Array		No

Response structure:

200 - successful operation

`_links` (object) - links to data sets

`type` (string) - Type of the entity

`distance` (number) - double

`units` (string) - No description specified

`id*` (string) - Unique id of the entity in the discovery API

`locale` (string) - Locale in which the content is returned

`name` (string) - Name of the entity

`description` (string) - Description's of the entity

`address` (object) - Address of the venue

`city` (object) - City of the venue

`additionalInfo` (string) - Additional information of the entity

`state` (object) - State / Province of the venue

`country` (object) - Country of the venue

`url` (string) - URL of a web site detail page of the entity

`postalCode` (string) - Postal code / zipcode of the venue

`location` (object) - Location of the venue

`timezone` (string) - Timezone of the venue

`currency` (string) - Default currency of ticket prices for events in this venue

`markets` (array) - Markets of the venue

`images` (array) - Images of the entity

dma (array) - The list of associated DMAs (Designated Market Areas) of the venue

`social` (object) - Social networks data

`boxOfficeInfo` (object) - Box office informations for the venue

`parkingDetail` (string) - Venue parking info

`accessibleSeatingDetail` (string) - Venue accessible seating detail

`generalInfo` (object) - General informations on the venue

`externalLinks` (object) - List of external links

`test` (boolean) - Indicate if this is a test entity, by default test entities won't appear in discovery API

`aliases` (array) - List of aliases for entity

`localizedAliases` (object) - List of localized aliases for entity

`upcomingEvents` (object) - number of upcoming events

`ada` (object) - ADA information

JavaScript

```
$.ajax({
   type:"GET",
   url:"https://app.ticketmaster.com/discovery/v2/venues/KovZpZAFnIEA.
IttyritKmS4D5",
   async:true,
   dataType: "json",
   success: function(json) {
                    console.log(json);
                    // Parse the response.
                    // Do other things.
                },
   error: function(xhr, status, err) {
                    // This time, we do not end up here!
                }
});
```

Examples:

Request Response

```
GET /discovery/v2/venues/KovZpZAFnIEA.json?apikey=MwfxPFGzAgeDcuLb6
Host: app.ticketmaster.com
X-Target-URI: https://app.ticketmaster.com
Connection: Keep-Alive
```

Find Suggest

Method: GET

Summary: Find Suggest

Description: Find search suggestions and filter your suggestions by location, source, etc.

`/discovery/v2/suggest`

Query parameters:

Parameter	Description	Type	Default Value
`keyword`	Keyword to search on	String	
`latlong`	Filter events by latitude and longitude, this filter is deprecated	String	

	and maybe removed in a future release, please use geoPoint instead		
`radius`	Radius of the area in which we want to search for events.	String	100
`unit`	Unit of the radius	String enum: ["miles", "km"]	miles
`source`	Filter entities by its primary source name OR publishing source name	String enum: ["ticketmaster", " universe", " frontgate", " tmr"]	
	The locale in ISO code format. Multiple comma-separated values can be provided.		

`locale`	When omitting the country part of the code (e.g. only 'en' or 'fr') then the first matching locale is used. When using a '*' it matches all locales. '*' can only be used at the end (e.g. 'en-us,en,*')	String	en
`includeTBA`	True, to include events with date to be announce (TBA)	String enum: ["yes", " no", " only"]	no if date parameter s otherwise
`includeTBD`	True, to include event with a date to be defined (TBD)	String enum: ["yes", " no", " only"]	no if date parameter s otherwise
	Yes if you want to		

`includeTest`	have entities flag as test in the response. Only, if you only wanted test entities	String enum: ["yes", " no", " only"]	no
`size`	Size of every entity returned in the response	String	5
`countryCode`	Filter suggestions by country code	String	
`segmentId`	Filter suggestions by segment id	Array	
`geoPoint`	filter events by geoHash	String	
`resource`	which resources to include in the suggest	Array	attractions,events,ven

	response, defaults to all resources		
`preferredCountry`	Popularity boost by country, default is us.	String enum: ["us", " ca"]	us
`startEndDateTime`	Filter event where event start and end date overlap this range	Array	
`localStartEndDateTime`	Filter event where event local start and end date overlap this range	Array	
`includeSpellcheck`	yes, to include spell check suggestions in the response.	String enum: ["yes", " no"]	no
	Filter		

`domain`	entities based on domains they are available on	Array	

Response structure:

200 - successful operation

`schema` (string) - A simple string response

Supported Country Codes

This the ISO Alpha-2 Code (https://en.wikipedia.org/wiki/ISO_3166-1) country values:

CountryCode
US (United States Of America)
AD (Andorra)
AI (Anguilla)
AR (Argentina)
AU (Australia)

AT (Austria)

AZ (Azerbaijan)

BS (Bahamas)

BH (Bahrain)

BB (Barbados)

BE (Belgium)

BM (Bermuda)

BR (Brazil)

BG (Bulgaria)

CA (Canada)

CL (Chile)

CN (China)

CO (Colombia)

CR (Costa Rica)

HR (Croatia)

CY (Cyprus)

CZ (Czech Republic)
DK (Denmark)
DO (Dominican Republic)
EC (Ecuador)
EE (Estonia)
FO (Faroe Islands)
FI (Finland)
FR (France)
GE (Georgia)
DE (Germany)
GH (Ghana)
GI (Gibraltar)
GB (Great Britain)
GR (Greece)
HK (Hong Kong)
HU (Hungary)

IS (Iceland)
IN (India)
IE (Ireland)
IL (Israel)
IT (Italy)
JM (Jamaica)
JP (Japan)
KR (Korea, Republic of)
LV (Latvia)
LB (Lebanon)
LT (Lithuania)
LU (Luxembourg)
MY (Malaysia)
MT (Malta)
MX (Mexico)
MC (Monaco)

ME (Montenegro)
MA (Morocco)
NL (Netherlands)
AN (Netherlands Antilles)
NZ (New Zealand)
ND (Northern Ireland)
NO (Norway)
PE (Peru)
PL (Poland)
PT (Portugal)
RO (Romania)
RU (Russian Federation)
LC (Saint Lucia)
SA (Saudi Arabia)
RS (Serbia)
SG (Singapore)

SK (Slovakia)
SI (Slovenia)
ZA (South Africa)
ES (Spain)
SE (Sweden)
CH (Switzerland)
TW (Taiwan)
TH (Thailand)
TT (Trinidad and Tobago)
TR (Turkey)
UA (Ukraine)
AE (United Arab Emirates)
UY (Uruguay)
VE (Venezuela)

Supported Markets

Markets can be used to filter events by larger regional demographic groupings. Each market is typically comprised of several DMAs.

USA

ID	Market
1	Birmingham & More
2	Charlotte
3	Chicagoland & Northern IL
4	Cincinnati & Dayton
5	Dallas - Fort Worth & More
6	Denver & More
7	Detroit, Toledo & More
8	El Paso & New Mexico
9	Grand Rapids & More
10	Greater Atlanta Area
11	Greater Boston Area
12	Cleveland, Youngstown & More
13	Greater Columbus Area

14	Greater Las Vegas Area
15	Greater Miami Area
16	Minneapolis/St. Paul & More
17	Greater Orlando Area
18	Greater Philadelphia Area
19	Greater Pittsburgh Area
20	Greater San Diego Area
21	Greater Tampa Area
22	Houston & More
23	Indianapolis & More
24	Iowa
25	Jacksonville & More
26	Kansas City & More
27	Greater Los Angeles Area
28	Louisville & Lexington
29	Memphis, Little Rock & More

30	Milwaukee & WI
31	Nashville, Knoxville & More
33	New England
34	New Orleans & More
35	New York/Tri-State Area
36	Phoenix & Tucson
37	Portland & More
38	Raleigh & Durham
39	Saint Louis & More
40	San Antonio & Austin
41	N. California/N. Nevada
42	Greater Seattle Area
43	North & South Dakota
44	Upstate New York
45	Utah & Montana
46	Virginia

47	Washington, DC and Maryland
48	West Virginia
49	Hawaii
50	Alaska
52	Nebraska
53	Springfield
54	Central Illinois
55	Northern New Jersey
121	South Carolina
122	South Texas
123	Beaumont
124	Connecticut
125	Oklahoma

Canada

ID	Market
102	Toronto, Hamilton & Area

103	Ottawa & Eastern Ontario
106	Manitoba
107	Edmonton & Northern Alberta
108	Calgary & Southern Alberta
110	B.C. Interior
111	Vancouver & Area
112	Saskatchewan
120	Montréal & Area

Europe

ID	Market
202	London (UK)
203	South (UK)
204	Midlands and Central (UK)
205	Wales and North West (UK)
206	North and North East (UK)
207	Scotland

208	Ireland
209	Northern Ireland
210	Germany
211	Netherlands
500	Sweden
501	Spain
502	Barcelona (Spain)
503	Madrid (Spain)
600	Turkey

Australia and New Zealand

ID	Market
302	New South Wales/Australian Capital Territory
303	Queensland
304	Western Australi
305	Victoria/Tasmania
306	Western Australia

351	North Island
352	South Island

Mexico

ID	Market
402	Mexico City and Metropolitan Area
403	Monterrey
404	Guadalajara

Supported Sources

Source
ticketmaster
tmr (ticketmaster resale platform)
universe
frontgate

Supported Locales

We support all languages, without any fallback.

Supported Designated Market Area (DMA)

Designated Market Area (DMA) can be used to segment and target events to a specific audience. Each DMA groups several zipcodes into a specific market segmentation based on population demographics.

DMA ID	DMA name
200	All of US
212	Abilene - Sweetwater
213	Albany - Schenectady - Troy
214	Albany, GA
215	Albuquerque - Santa Fe
216	Alexandria, LA
217	Alpena
218	Amarillo

219	Anchorage
220	Atlanta
221	Augusta
222	Austin
223	Bakersfield
224	Baltimore
225	Bangor
226	Baton Rouge
227	Beaumont - Port Arthur
228	Bend, OR
229	Billings
230	Biloxi - Gulfport
231	Binghamton
232	Birmingham (Anniston and Tuscaloosa)
233	Bluefield - Beckley - Oak Hill
234	Boise

235	Boston (Manchester)
236	Bowling Green
237	Buffalo
238	Burlington - Plattsburgh
239	Butte - Bozeman
240	Casper - Riverton
241	Cedar Rapids - Waterloo & Dubuque
242	Champaign & Springfield - Decatur
243	Charleston, SC
244	Charleston-Huntington
245	Charlotte
246	Charlottesville
247	Chattanooga
248	Cheyenne - Scottsbluff
249	Chicago
250	Chico - Redding

251	Cincinnati
252	Clarksburg - Weston
253	Cleveland
254	Colorado Springs - Pueblo
255	Columbia - Jefferson City
256	Columbia, SC
257	Columbus - Tupelo - West Point
258	Columbus, GA
259	Columbus, OH
260	Corpus Christi
261	Dallas - Fort Worth
262	Davenport - Rock Island - Moline
263	Dayton
264	Denver
265	Des Moines - Ames
266	Detroit

267	Dothan
268	Duluth - Superior
269	El Paso
270	Elmira
271	Erie
272	Eugene
273	Eureka
274	Evansville
275	Fairbanks
276	Fargo - Valley City
277	Flint - Saginaw - Bay City
278	Florence - Myrtle Beach
279	Fort Myers - Naples
280	Fort Smith - Fayetteville - Springdale - Rogers
281	Fort Wayne
282	Fresno - Visalia

283	Gainesville
284	Glendive
285	Grand Junction - Montrose
286	Grand Rapids - Kalamazoo - Battle Creek
287	Great Falls
288	Green Bay - Appleton
289	Greensboro - High Point - Winston-Salem
290	Greenville - New Bern - Washington
291	Greenville - Spartansburg - Asheville - Anderson
292	Greenwood - Greenville
293	Harlingen - Weslaco - Brownsville - McAllen
294	Harrisburg - Lancaster - Lebanon - York
295	Harrisonburg
296	Hartford & New Haven
297	Hattiesburg - Laurel
298	Helena

299	Honolulu
300	Houston
301	Huntsville - Decatur (Florence)
302	Idaho Falls - Pocatello
303	Indianapolis
304	Jackson, MS
305	Jackson, TN
306	Jacksonville
307	Johnstown - Altoona
308	Jonesboro
309	Joplin - Pittsburg
310	Juneau
311	Kansas City
312	Knoxville
313	La Crosse - Eau Claire
314	Lafayette, IN

315	Lafayette, LA
316	Lake Charles
317	Lansing
318	Laredo
319	Las Vegas
320	Lexington
321	Lima
322	Lincoln & Hastings - Kearney
323	Little Rock - Pine Bluff
324	Los Angeles
325	Louisville
326	Lubbock
327	Macon
328	Madison
329	Mankato
330	Marquette

331	Medford - Klamath Falls
332	Memphis
333	Meridian
334	Miami - Fort Lauderdale
335	Milwaukee
336	Minneapolis - Saint Paul
337	Minot - Bismarck - Dickinson
338	Missoula
339	Mobile - Pensacola (Fort Walton Beach)
340	Monroe - El Dorado
341	Monterey - Salinas
342	Montgomery (Selma)
343	Nashville
344	New Orleans
345	New York
346	Norfolk - Portsmouth - Newport News

347	North Platte
348	Odessa - Midland
349	Oklahoma City
350	Omaha
351	Orlando - Daytona Beach - Melbourne
352	Ottumwa - Kirksville
353	Paducah - Cape Girardeau - Harrisburg - Mt Vernon
354	Palm Springs
355	Panama City
356	Parkersburg
357	Peoria - Bloomington
358	Philadelphia
359	Phoenix
360	Pittsburgh
361	Portland - Auburn
362	Portland, OR

363	Presque Isle
364	Providence - New Bedford
365	Quincy - Hannibal - Keokuk
366	Raleigh - Durham (Fayetteville)
367	Rapid City
368	Reno
369	Richmond - Petersburg
370	Roanoke - Lynchburg
371	Rochester - Mason City - Austin
372	Rochester, NY
373	Rockford
374	Sacramento - Stockton - Modesto
375	Saint Joseph
376	Saint Louis
377	Salisbury
378	Salt Lake City

379	San Angelo
380	San Antonio
381	San Diego
382	San Francisco - Oakland - San Jose
383	Santa Barbara - Santa Maria - San Luis Obispo
384	Savannah
385	Seattle - Tacoma
386	Sherman - Ada
387	Shreveport
388	Sioux City
389	Sioux Falls (Mitchell)
390	South Bend - Elkhart
391	Spokane
392	Springfield - Holyoke
393	Springfield, MO
394	Syracuse

395	Tallahassee - Thomasville
396	Tampa - Saint Petersburg (Sarasota)
397	Terre Haute
398	Toledo
399	Topeka
400	Traverse City - Cadillac
401	Tri-Cities, TN-VA
402	Tucson (Sierra Vista)
403	Tulsa
404	Twin Falls
405	Tyler - Longview (Lufkin & Nacogdoches)
406	Utica
407	Victoria
408	Waco - Temple - Bryan
409	Washington DC (Hagerstown)
410	Watertown

411	Wausau - Rhinelander
412	West Palm Beach - Fort Pierce
413	Wheeling - Steubenville
414	Wichita - Hutchinson
415	Wichita Falls & Lawton
416	Wilkes Barre - Scranton
417	Wilmington
418	Yakima - Pasco - Richland - Kennewick
419	Youngstown
420	Yuma - El Centro
421	Zanesville
422	Northern New Jersey
500	All of Canada
501	Barrie-Orillia
502	Belleville-Peterborough
503	Owen Sound

504	Burnaby-New Westminster-Surrey
505	Calgary-Banff
506	Edmonton
507	Fraser Valley
508	Hamilton-Niagara
509	Kitchener-Waterloo
510	London-Sarnia
511	Mississauga-Oakville
512	Newfoundland
513	NWT
514	New Brunswick
515	Northern Ontario
516	Nova Scotia
517	Nunavit
518	Okanagan-Kootenays
519	Ottawa-Gatineau

520	PEI
521	Prince George-North
522	Montreal and Surrounding Area
523	Red Deer
524	Saskatchewan
527	Toronto
528	Vancouver
529	Sunshine Coast-Islands
530	Winnipeg-Brandon
531	Yukon
601	All of United Kingdom
602	London
603	South
604	Midlands and Central
605	Wales and North West
606	North and North East

607	Scotland
608	All of Ireland
609	Northern Ireland
610	Germany
611	Netherlands
612	Sweden
613	Turkey
701	All of Australia
702	New South Wales/Australian Capital Territory
703	Queensland
704	Western Australia
705	Victoria/Tasmania
750	All of New Zealand
751	North Island
752	South Island
801	All of Mexico

802	Mexico City and Metropolitan Area
803	Monterrey
804	Guadalajara
901	All of Spain
902	Barcelona
903	Madrid

 © Ticketmaster2026