


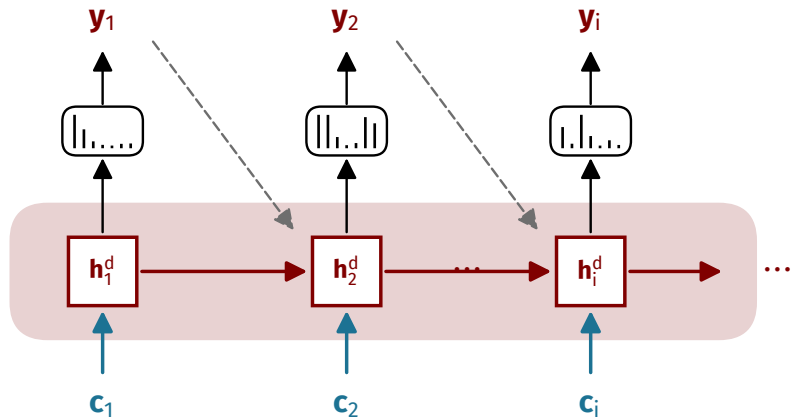

a different context at every step:
 c_i is computed from all the
encoder states, for step i