

Projekt zaliczeniowy - Mieszkania

Konfiguracja parametrów startowych nowego projektu Spring Boot

The screenshot shows the 'New Project' dialog in IntelliJ IDEA. The left sidebar lists project types under 'New Project' (Java, Kotlin, Groovy, Empty Project) and 'Generators' (Maven Archetype, Spring Boot, JavaFX, Ktor, HTML, Vite). 'Spring Boot' is selected. The main area contains the following configuration fields:

- Server URL: `start.spring.io`
- Name: `mieszkania`
- Location: `~\IdeaProjects`
Project will be created in: `~\IdeaProjects\mieszkania`
☐ Create Git repository
- Language: `Java` (selected), `Kotlin`, `Groovy`
- Type: `Gradle - Groovy` (selected), `Gradle - Kotlin`, `Maven`
- Group: `pl.pollub`
- Artifact: `mieszkania`
- Package name: `pl.pollub.mieszkania`
- JDK: `Eclipse Temurin 25.0.2 C:\Program Files\Eclipse Adoptiu` (selected)
- Java: `17` (selected)
- Packaging: `Jar` (selected), `War`
- Configuration: `Properties` (selected), `YAML`

At the bottom, there is a 'Next' button and a 'Cancel' button.

Deklaracja niezbędnych zależności systemowych

New Project

Spring Boot: 4.1.0

Dependencies:

Q

> Developer Tools

> Web

> Template Engines

> Security

> SQL

> NoSQL

> Messaging

> I/O

> Ops

> Observability

> Testing

> Spring Cloud

> Spring Cloud Config

> Spring Cloud Discovery

> Spring Cloud Routing

> Spring Cloud Circuit Breaker

> Spring Cloud Messaging

> VMware Tanzu Application Service

> VMware Tanzu Spring Enterprise Extensions

> VMware Tanzu Spring SDK

> Microsoft Azure

> Google Cloud

Nothing selected

Added dependencies:

Spring Web

Spring Data JPA

MySQL Driver

Lombok


?

Previous


Create

Cancel

Widok struktury tabel w bazie danych wygenerowanej automatycznie przez mechanizm mapowania obiektowo-relacyjnego

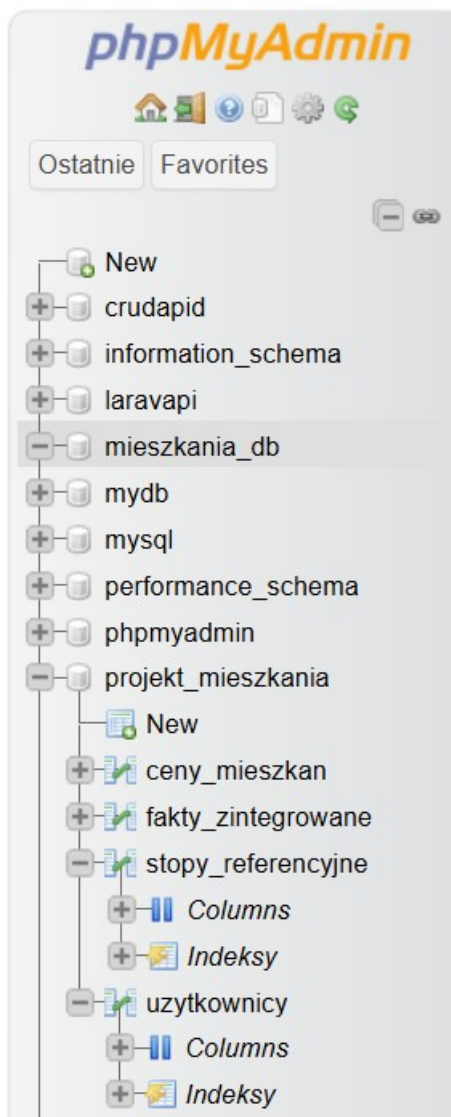


Testowe wywołanie i pomyślna weryfikacja odpowiedzi JSON z zewnętrznego interfejsu API Głównego Urzędu Statystycznego

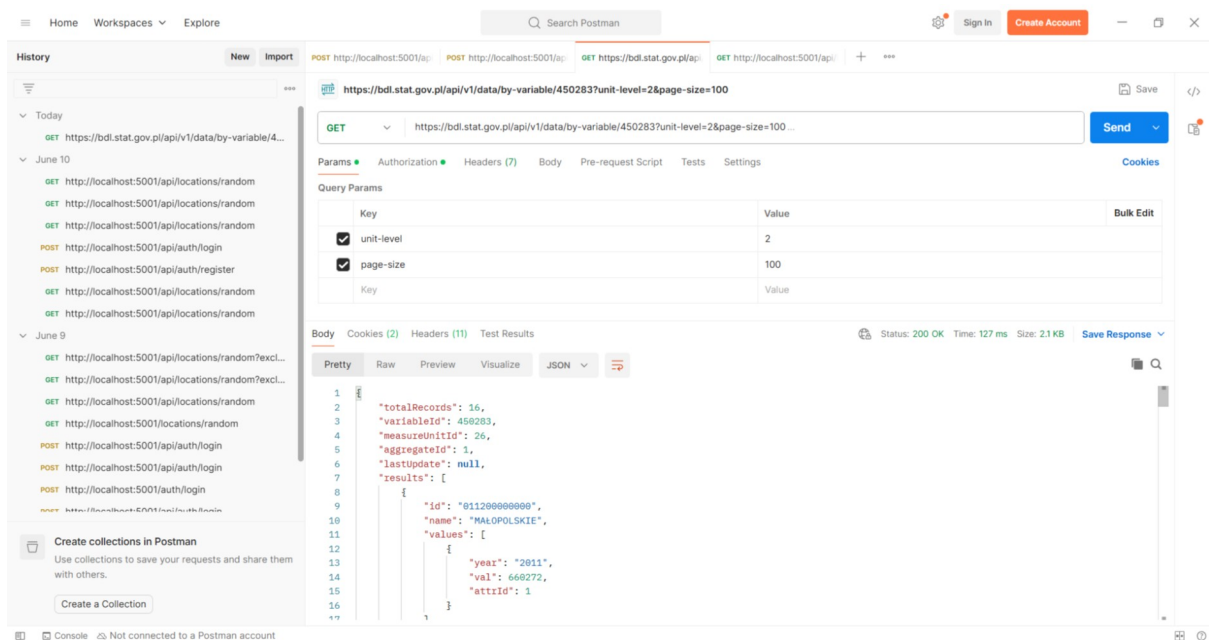

Symulacja najniższego poziomu izolacji, w której druga transakcja odczytuje niezatwierdzone jeszcze przez pierwszego użytkownika modyfikacje

Zastosowanie READ UNCOMMITTED w terminalu A

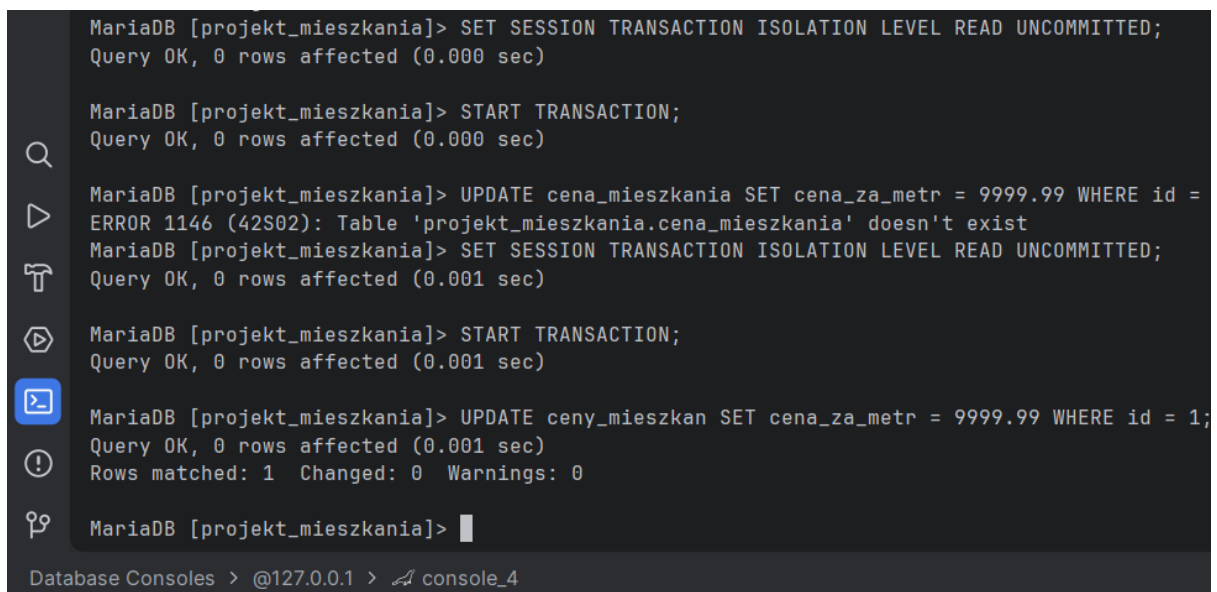

Wynik w terminalu B

```
MariaDB [projekt_mieszkania]> SET SESSION TRANSACTION ISOLATION LEVEL READ UNCOMMITTED;
Query OK, 0 rows affected (0.001 sec)

MariaDB [projekt_mieszkania]> START TRANSACTION;
Query OK, 0 rows affected (0.000 sec)

MariaDB [projekt_mieszkania]> SELECT id, cena_za_metr FROM cena_mieszkania WHERE id = 1;
ERROR 1146 (42S02): Table 'projekt_mieszkania.cena_mieszkania' doesn't exist
MariaDB [projekt_mieszkania]> SELECT id, cena_za_metr FROM ceny_mieszkan WHERE id = 1;
+----+-----+
| id | cena_za_metr |
+----+-----+
| 1  | 9999.99      |
+----+-----+
1 row in set (0.001 sec)

MariaDB [projekt_mieszkania]>
```

Po komendzie ROLLBACK w konsoli A wynik dla B

```
MariaDB [projekt_mieszkania]> SELECT id, cena_za_metr FROM ceny_mieszkan WHERE id = 1;
+----+-----+
| id | cena_za_metr |
+----+-----+
| 1  | 5555.55      |
+----+-----+
1 row in set (0.001 sec)
```

Test bezpiecznego poziomu izolacji, który poprzez wewnętrzny mechanizm wirtualnej migawki całkowicie zablokował dostęp do niezatwierdzonych zmian z innej sesji.

Po zamianie na READ REPEATABLE

```
MariaDB [projekt_mieszkania]> SET SESSION TRANSACTION ISOLATION LEVEL REPEATABLE READ;
Query OK, 0 rows affected (0.000 sec)

MariaDB [projekt_mieszkania]> START TRANSACTION;
Query OK, 0 rows affected (0.000 sec)

MariaDB [projekt_mieszkania]> UPDATE cena_mieszkania SET cena_za_metr = 5555.55 WHERE id = 1;
ERROR 1146 (42S02): Table 'projekt_mieszkania.cena_mieszkania' doesn't exist
MariaDB [projekt_mieszkania]> UPDATE ceny_mieszkan SET cena_za_metr = 5555.55 WHERE id = 1;
Query OK, 1 row affected (0.028 sec)
Rows matched: 1  Changed: 1  Warnings: 0

MariaDB [projekt_mieszkania]>
```


Wynik Dla konsoli B

```
MariaDB [projekt_mieszkania]> SELECT id, cena_za_metr FROM ceny_mieszkan WHERE id = 1;
+----+-----+
| id | cena_za_metr |
+----+-----+
| 1  |      9999.99 |
+----+-----+
1 row in set (0.001 sec)
```

Po komendzie ROLLBACK wynik na konsoli B:

```
MariaDB [projekt_mieszkania]> SELECT id, cena_za_metr FROM ceny_mieszkan WHERE id = 1;
+----+-----+
| id | cena_za_metr |
+----+-----+
| 1  |      9999.99 |
+----+-----+
1 row in set (0.001 sec)
```

Zrzut logów systemowych potwierdzający prawidłowe, samodzielne i cykliczne powtarzanie procesu integracji danych przez mechanizm @Scheduled

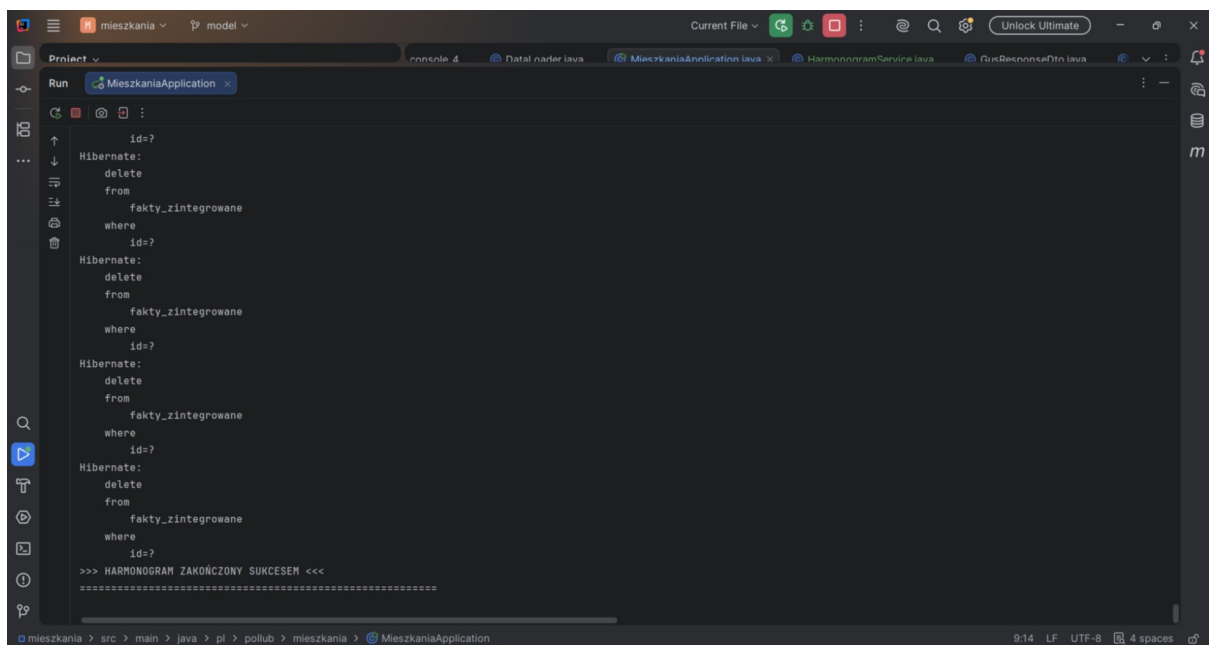

The screenshot shows an IDE window with a Java application running. The console output displays a series of Hibernate delete statements for a table named 'fakty_zintegrowane'. The statements are repeated five times, each with a different 'id' value (1, 2, 3, 4, 5). The log concludes with the message '>>> HARMONOGRAM ZAKOŃCZONY SUKCESEM <<<' followed by a separator line. The IDE interface includes a project explorer on the left, a run console at the bottom, and a status bar at the very bottom showing the file path and encoding.

Tabela podsumowująca test obciążeniowy z programu Apache JMeter, dokumentująca stu procentową niezawodność serwera (Error 0.00%) przy jednoczesnym ataku 1000 zapytań HTTP.

Summary Report (C:\apache-jmeter-5.6.3\bin\Summary Report.jmx) - Apache JMeter (5.6.3)

File Edit Search Run Options Tools Help

Test Plan
Thread Group
HTTP Request
Summary Report

Summary Report

Name: Summary Report

Comments:

Write results to file / Read from file

Filename: Browse... Log/Display Only: ☐ Errors ☐ Successes

Label	# Samples	Average	Min	Max	Std. Dev.	Error %	Throughput	Received KB/sec	Sent KB/sec	Avg. Bytes
HTTP Request	1000	71	11	437	81.38	0.00%	199.4/sec	5072.83	26.48	26056.0
TOTAL	1000	71	11	437	81.38	0.00%	199.4/sec	5072.83	26.48	26056.0

Pobieranie i budowanie skonteneryzowanego środowiska:

```

PS C:\Users\Jakub\IdeaProjects\mieszkania> docker-compose up --build
#1 [internal] load local bake definitions
#1 reading from stdin 531B done
#1 DONE 0.0s

#2 [internal] load build definition from Dockerfile
#2 transferring dockerfile: 671B 0.0s done
#2 DONE 0.0s

#3 [internal] load metadata for docker.io/library/eclipse-temurin:17-jre-jammy
#3 DONE 1.9s

#4 [internal] load metadata for docker.io/library/maven:3.9-eclipse-temurin-17
#4 DONE 1.9s

#5 [internal] load .dockerignore
#5 transferring context: 2B done
#5 DONE 0.0s

#6 [stage-1 1/3] FROM docker.io/library/eclipse-temurin:17-jre-jammy@sha256:47c73dc23524b031bed0a5030410c722af6a8b49d4b25898ea8f4615895065f0
#6 resolve docker.io/library/eclipse-temurin:17-jre-jammy@sha256:47c73dc23524b031bed0a5030410c722af6a8b49d4b25898ea8f4615895065f0 0.0s done
#6 DONE 0.2s

#7 [internal] load build context
#7 transferring context: 28.99kB 0.0s done
#7 DONE 0.0s

#8 [build 1/6] FROM docker.io/library/maven:3.9-eclipse-temurin-17@sha256:e8ef73dbd33b69fe497fd96b3bbbd85eff84ac4c564a5784ab02ad941b32c12b
#8 resolve docker.io/library/maven:3.9-eclipse-temurin-17@sha256:e8ef73dbd33b69fe497fd96b3bbbd85eff84ac4c564a5784ab02ad941b32c12b 0.0s done
#8 DONE 0.4s

#9 [stage-1 1/3] FROM docker.io/library/eclipse-temurin:17-jre-jammy@sha256:47c73dc23524b031bed0a5030410c722af6a8b49d4b25898ea8f4615895065f0
#9 sha256:634ad61db1e6be8de10d0591e488e45ceea80bef7545b1f6547525764244ea7c 0B / 47.56MB 0.3s
#9 sha256:c93b6475daa329a3740bb43abc8e5f9a930e634998d68f8c32f092667b8ccfb9 0B / 2.28kB 0.2s
#9 sha256:143cf987f34267ef9e3627b22d8811a39631ffa6bb25e34c8b0b3eac4d1eae3 0B / 158B 0.2s
#9 sha256:2d6b32b3ef7070cfe8ecce1e079c88c304e1d8c9a31b57eaa1a6b04a60b0acab 0B / 16.15MB 0.2s
#9 sha256:c93b6475daa329a3740bb43abc8e5f9a930e634998d68f8c32f092667b8ccfb9 2.28kB / 2.28kB 0.6s done

```

Autoryzacja:

The screenshot shows the Postman interface for a GET request to `localhost:8080/api/data/json`. The 'Authorization' tab is selected, and 'No Auth' is chosen from the 'Auth Type' dropdown. The response status is **403 Forbidden** with a 6 ms response time and 300 B of data. The 'Body' tab is active, showing the raw response content.

Auth Type: No Auth

No Auth

This request does not use any authorization. ⓘ

Body Cookies Headers 10 Test Results 403 Forbidden 6 ms 300 B

Raw Preview Try with different auth credentials

1

The screenshot shows the Postman interface for the same GET request, but now with 'Bearer Token' selected in the 'Auth Type' dropdown. A token is entered in the 'Token' field. The response status is **200 OK** with a 29 ms response time and 157.51 KB of data. The 'Body' tab is active, showing the JSON response.

Auth Type: Bearer Token

Token: [redacted]

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Body Cookies Headers 11 Test Results 200 OK 29 ms 157.51 KB

{ } JSON Preview Visualize

```
1 [
2   {
3     "id": 1937,
4     "kwartal": 1,
5     "rok": 2016,
6     "sredniaCenaMieszkania": 5800.0,
7     "sredniaStopaWKwarcie": 1.5,
8     "wojewodztwo": "Dolnoslaskie"
9   },
10  ]
```


Frontend:

