


```
PS D:\129ha> git add .
PS D:\129ha> git commit -m "新增 檔案 "
[main cf43709] 新增 檔案
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 1.txt
PS D:\129ha> git push
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 24 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 287 bytes | 287.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/facebookkiss520-dotcom/129ha.git
46aa76c..cf43709 main -> main
PS D:\129ha>
```



The screenshot shows a Windows terminal window with a dark background. The terminal displays the output of the following commands: `git add .`, `git commit -m "新增 檔案 "`, and `git push`. The output shows the creation of a new commit on the `main` branch, with 1 file changed and 0 insertions or deletions. The push operation is successful, updating the remote repository from `46aa76c` to `cf43709`. The terminal also shows the output of `git status` and `git log` commands.

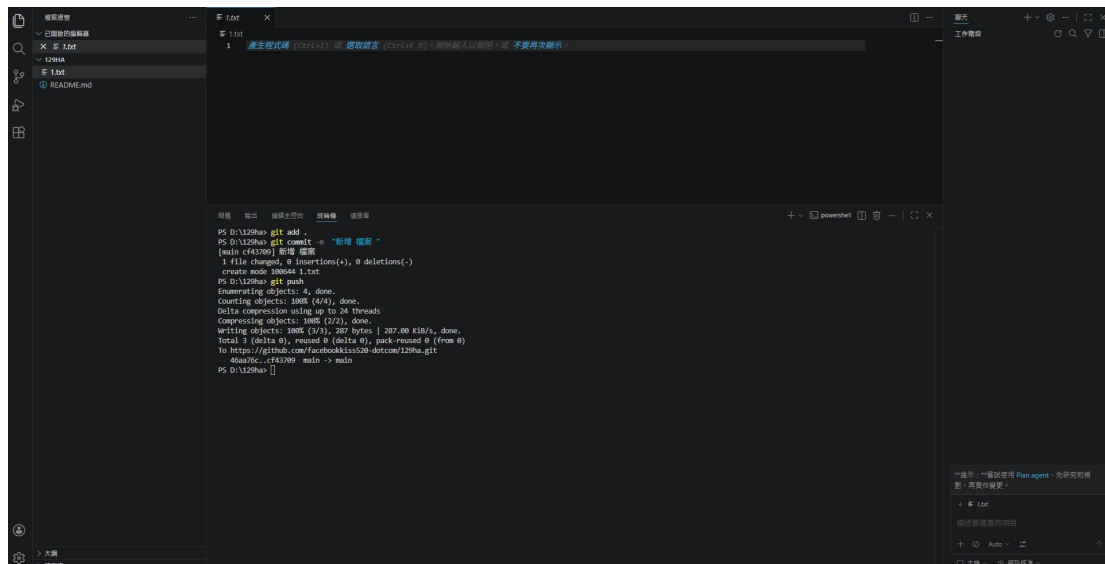