

<第一步>

在GitHub上新增一個資料檔案

~要記得開啟 Add README~

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1

General

Owner *

lina88091500

Repository name *

web-course study

✔ Your new repository will be created as web-course-study-.

The repository name can only contain ASCII letters, digits, and the characters -, ., and _.

Great repository names are short and memorable. How about [ubiquitous-telegram](#)?

Description

鄭光凱老師課程學習練習檔案

13 / 350 characters

2

Configuration

Choose visibility *

Choose who can see and commit to this repository

Public

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

On

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore

Add license


Licenses explain how others can use your code. [About licenses](#)

No license

Create repository

<第二步>


複製建好的檔案網址

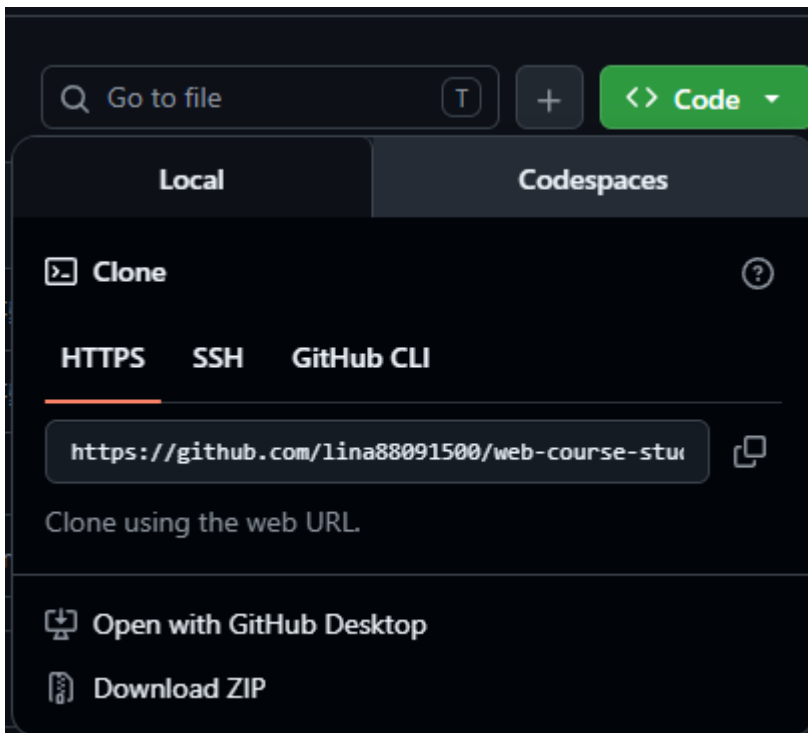

git clone <https://github.com/lina88091500/web-course-study-.git>

<第三步>

在要放置的區域資料夾處右鍵點選 " Open Git Bash here "

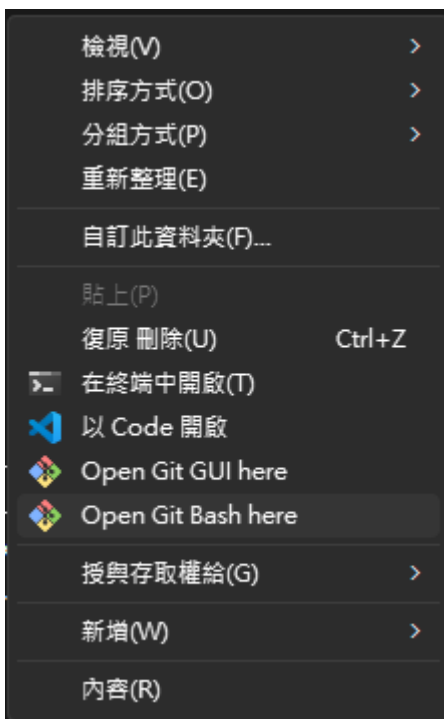

<第四步>

可以先去設定字型文字大小~或Ctrl +/- 控制大小


1.git clone 複製的檔案網址 (後面沒打檔名就會預設是當初設檔的名稱)

```
MINGW64/d
User@1113-01 MINGW64 /d
$ git clone https://github.com/lina88091500/web-course-study-.git
Cloning into 'web-course-study-'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.

User@1113-01 MINGW64 /d
$ |
```

<第五步>

可以看到檔案建入本地端資料夾中啦!



ls也可以看到

```
User@1113-01 MINGW64 /d
$ ls
'$RECYCLE.BIN' /
11501-FULL-BASIC /
Antigravity /
Git /
'Microsoft VS Code' /
P /
'System Volume Information' /
VSCodeUserSetup-x64-1.115.0.exe*
Xampp /
git-0416 /
github-had-project-lina88091500 /
newgit-0416 /
project /
test /
web-course-study- /
```

cd 資料夾名稱/

確認有分支 (main)

```
User@1113-01 MINGW64 /d
$ cd web-course-study-/

User@1113-01 MINGW64 /d/web-course-study- (main)
$ |
```

<第六步>

將之前檔案複製進新加的這份資料夾中

新檔用 VS Code 開啟會看到檔案都進去了

- 1.用內建終端機輸入指令 `git add .` (將有變動之檔案加入git監管中)
- 2.`git commit -m"自訂變動內容名稱"`
- 3.`git push` (將檔案回傳至雲端)
- 4.GitHub重整就能看到檔案傳上去啦



• git init

再於初始化要建檔時使用 (無須重複使用)

• git add .

將所有變動檔案加入git的監管中

• git status

查看專案狀態

• git commit -m "為變動之記錄命名"

將變動之檔案建立變動記錄

- git log

查看專案版本紀錄

- git checkout "複製相對路徑網址"

還原檔案 (在 VS Code 中使用必須把斜線更改方向)