

project : laravel_20260810

- 1- 安裝
- 2- 設定 xampp
- 3- route
- 4- view
- 5- controller
- 6- route - controller - view

1- 安裝

composer create-project "laravel/laravel:^10.0" example-app

composer create-project "laravel/laravel:^12.0"

laravel_20260810

git bash

2- 設定 xampp

DocumentRoot

"C:/xampp/htdocs/laravel202607/laravel_20260810/public"

<Directory

"C:/xampp/htdocs/laravel202607/laravel_20260810/public">

views/welcome.blade.php

hello 2026-08-10

3- route

```
web.php > Closure
1  <?php
2
3  use Illuminate\Support\Facades\Route;
4
5  // localhost/cars
6  Route::get('/cars', function () {
7      // dd('hello route cars');
8      // return view('welcome');
9      return view('car.index');
10 });
11
```

4- view



The screenshot shows a code editor with a file explorer on the left and a code editor on the right. The file explorer shows the project structure, including the 'views' directory and the 'car' subdirectory. The 'index.blade.php' file is selected. The code editor shows the content of the file, which is 'hello view car index'.

```
resources > views > car > index.blade.php
1  hello view car index
```

5- controller

php artisan make:controller UserController

php artisan make:controller CarController

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607
$ cd larave1_20260806/

User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$ php artisan make:controller CarController

INFO Controller [C:\xampp\htdocs\larave1202607\larave1_20260806\app\Http\Con
trollers\CarController.php] created successfully.
```

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$ php artisan make:controller CarController

INFO Controller [C:\xampp\htdocs\larave1202607\larave1_20260806\app\Http\Con
trollers\CarController.php] created successfully.

User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$ php artisan make:controller CarController

ERROR Controller already exists.

User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$ php artisan make:controller CarController

INFO Controller [C:\xampp\htdocs\larave1202607\larave1_20260806\app\Http\Con
trollers\CarController.php] created successfully.


User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$
```

route link controller

```
1 use App\Http\Controllers\UserController;
2
3 Route::get('/user/{id}', [UserController::class, 'show']);
```


```
use App\Http\Controllers\UserController;
Route::get('/user/{id}',
[UserController::class, 'show']);
```

```
use App\Http\Controllers\CarController;
Route::get('/cars', [CarController::class,
'index']);
```

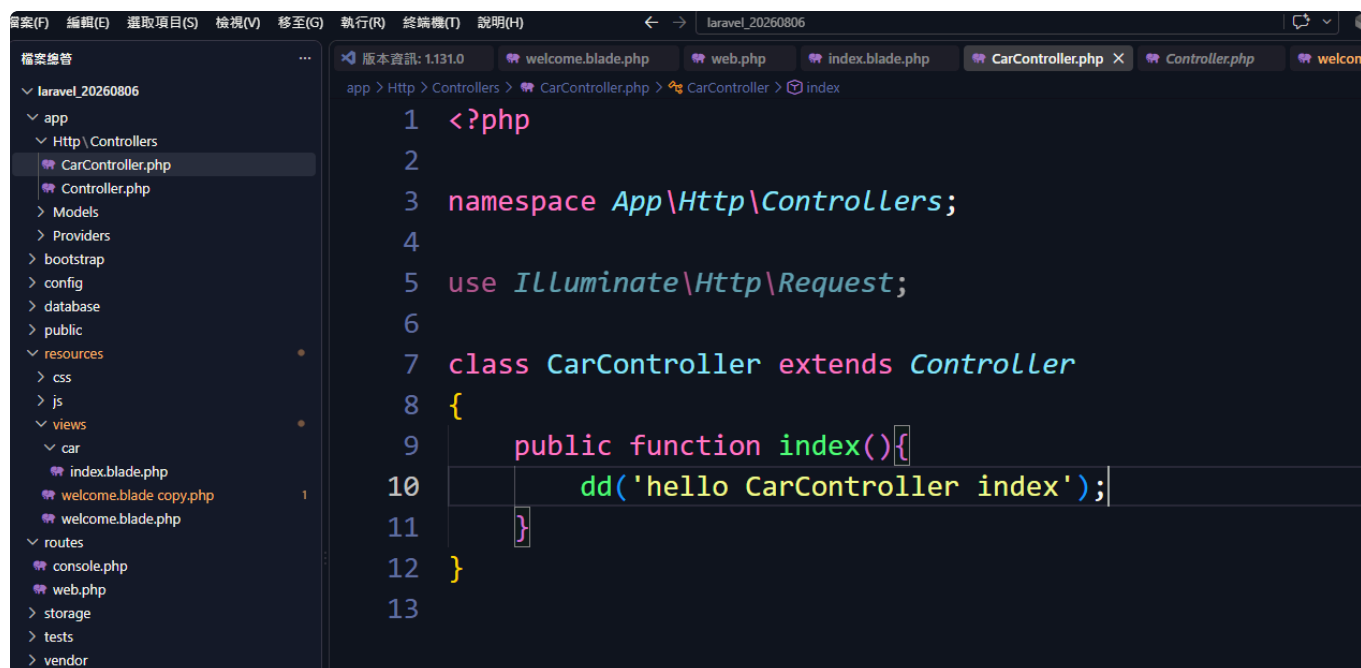


```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CarController extends Controller
8 {
9     public function index(){
10         dd('hello CarController index');
11     }
12 }
13
```

6- route - controller - view

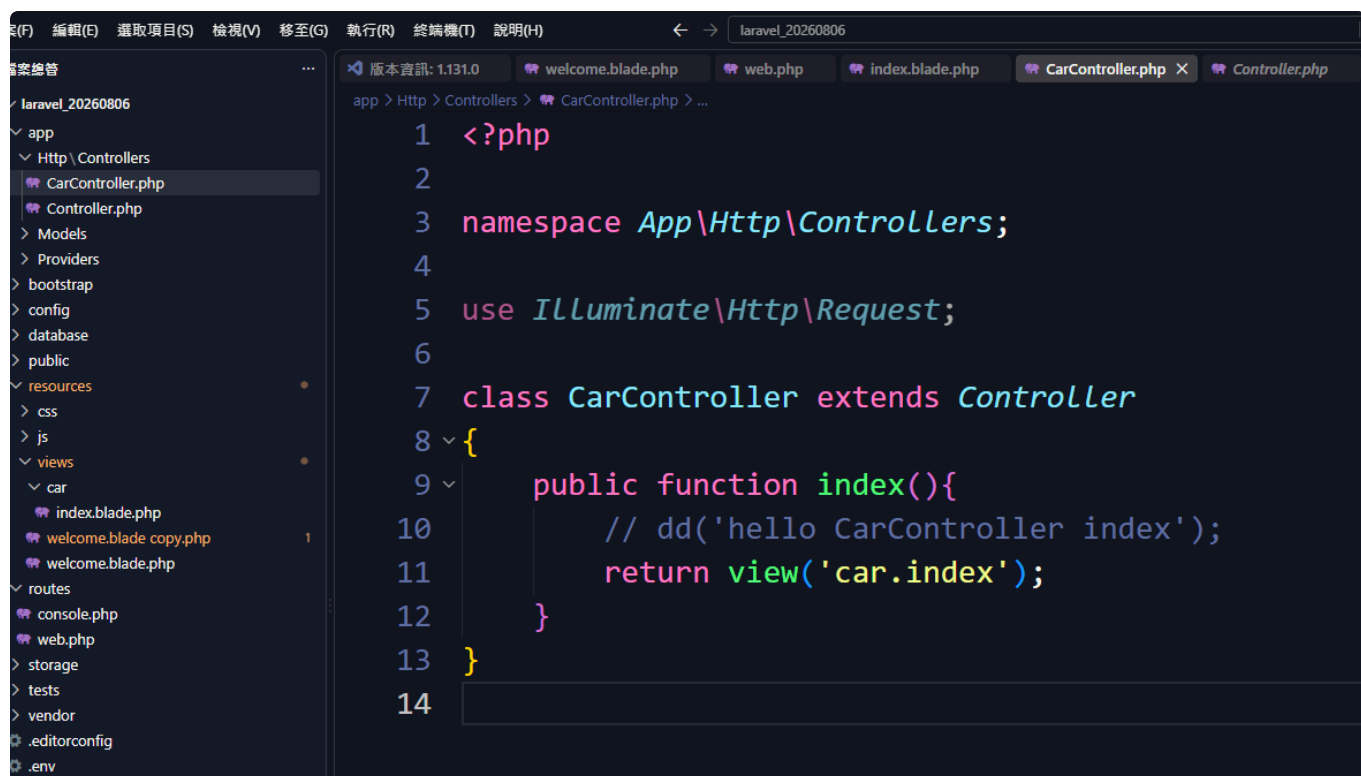


```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CarController extends Controller
8 {
9     public function index(){
10         // dd('hello CarController index');
11         return view('car.index');
12     }
13 }
14
```

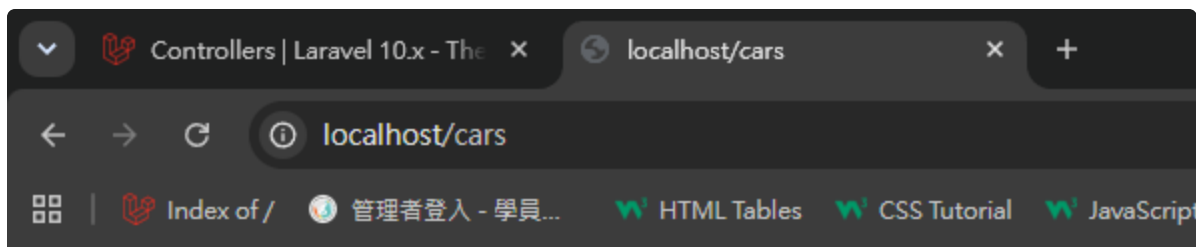

hello view car index

=====

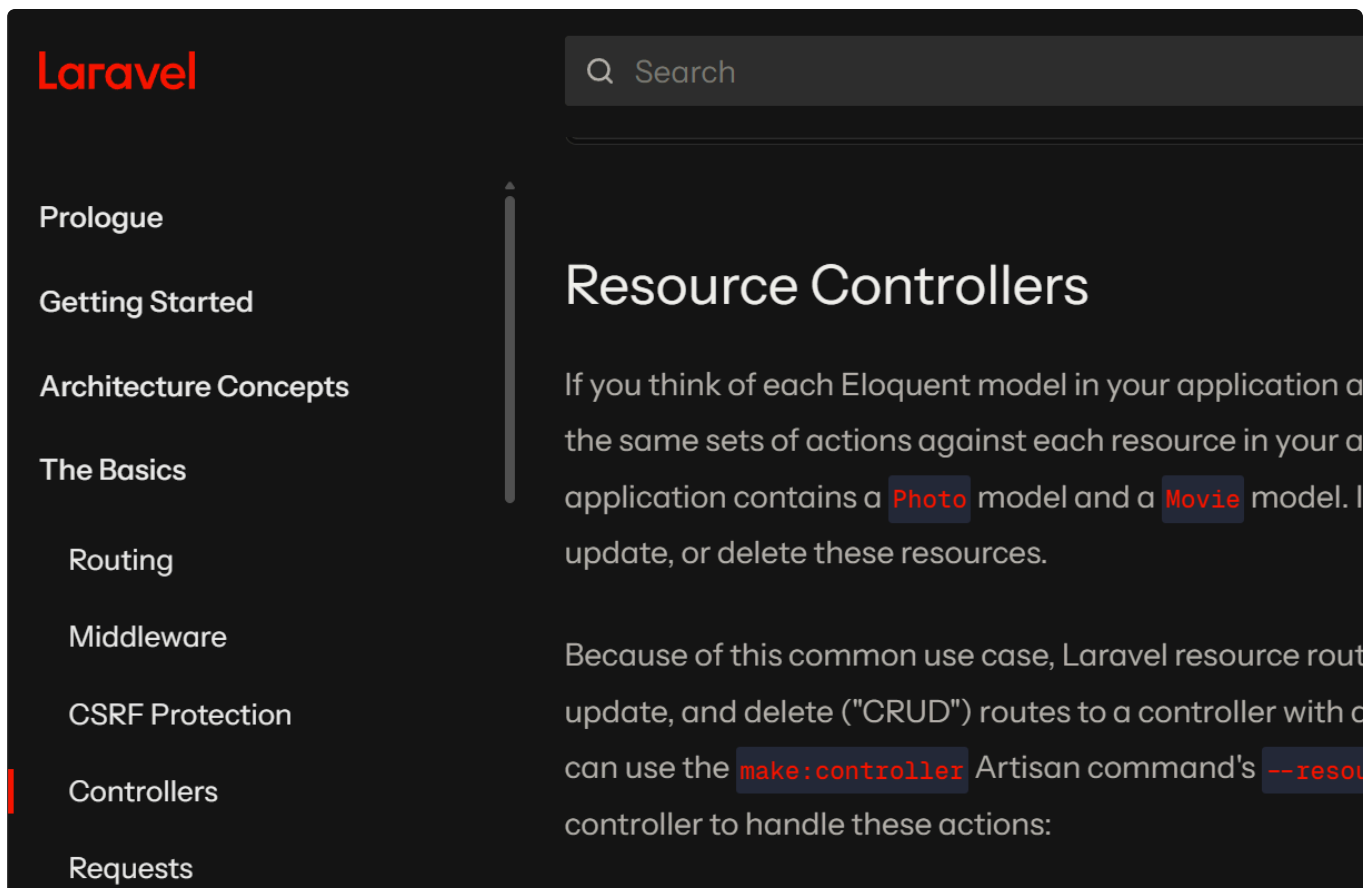


```
php artisan make:controller PhotoController --resource
php artisan make:controller DogController --resource
php artisan make:controller CatController --resource
```

```
use App\Http\Controllers\PhotoController;
Route::resource('photos',
PhotoController::class);

use App\Http\Controllers\DogController;
Route::resource('dogs', DogController::class);

use App\Http\Controllers\CatController;
Route::resource('cats', CatController::class);
```

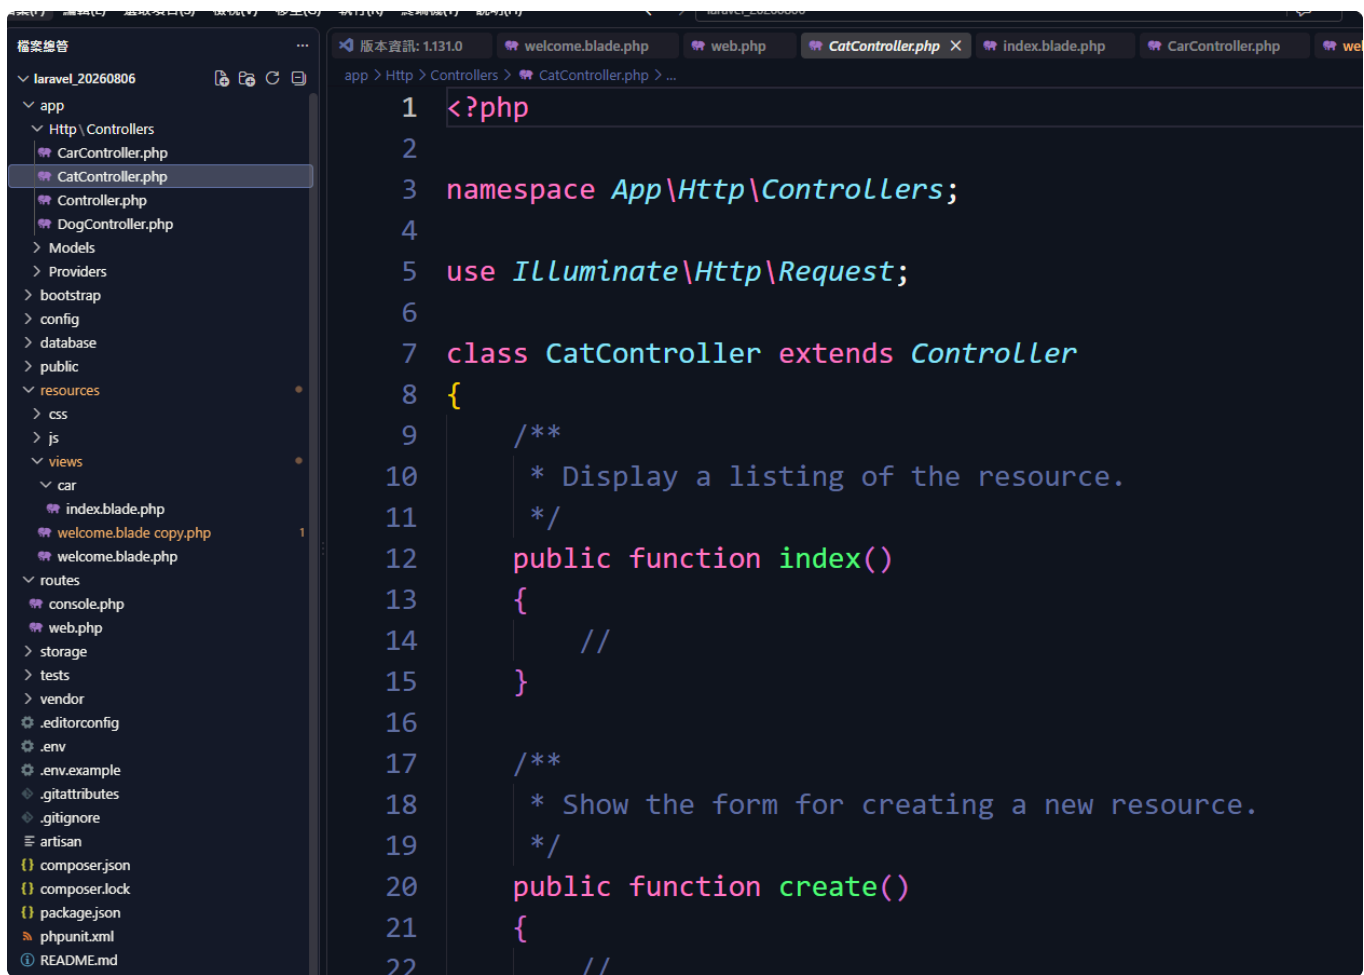

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CatController extends Controller
8 {
9     /**
10      * Display a listing of the resource.
11      */
12     public function index()
13     {
14         //
15     }
16
17     /**
18      * Show the form for creating a new resource.
19      */
20     public function create()
21     {
22         //
```

php artisan route:list


```

User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_20260806
$ php artisan route:list

GET|HEAD      cars ..... cars.index > CarController@index
GET|HEAD      cats ..... cats.index > CatController@index
POST          cats ..... cats.store > CatController@store
GET|HEAD      cats/create ..... cats.create > CatController@create
GET|HEAD      cats/{cat} ..... cats.show > CatController@show
PUT|PATCH    cats/{cat} ..... cats.update > CatController@update
DELETE        cats/{cat} ..... cats.destroy > CatController@destroy
GET|HEAD      cats/{cat}/edit ..... cats.edit > CatController@edit
GET|HEAD      dogs ..... dogs.index > DogController@index
POST          dogs ..... dogs.store > DogController@store
GET|HEAD      dogs/create ..... dogs.create > DogController@create
GET|HEAD      dogs/{dog} ..... dogs.show > DogController@show
PUT|PATCH    dogs/{dog} ..... dogs.update > DogController@update
DELETE        dogs/{dog} ..... dogs.destroy > DogController@destroy
GET|HEAD      dogs/{dog}/edit ..... dogs.edit > DogController@edit
GET|HEAD      storage/{path} storage.local > vendor/laravel/framework/src...
PUT           storage/{path} storage.local.upload > vendor/laravel/framework...
GET|HEAD      up vendor/laravel/framework/src/Illuminate/Foundation/Confi...


```

blade

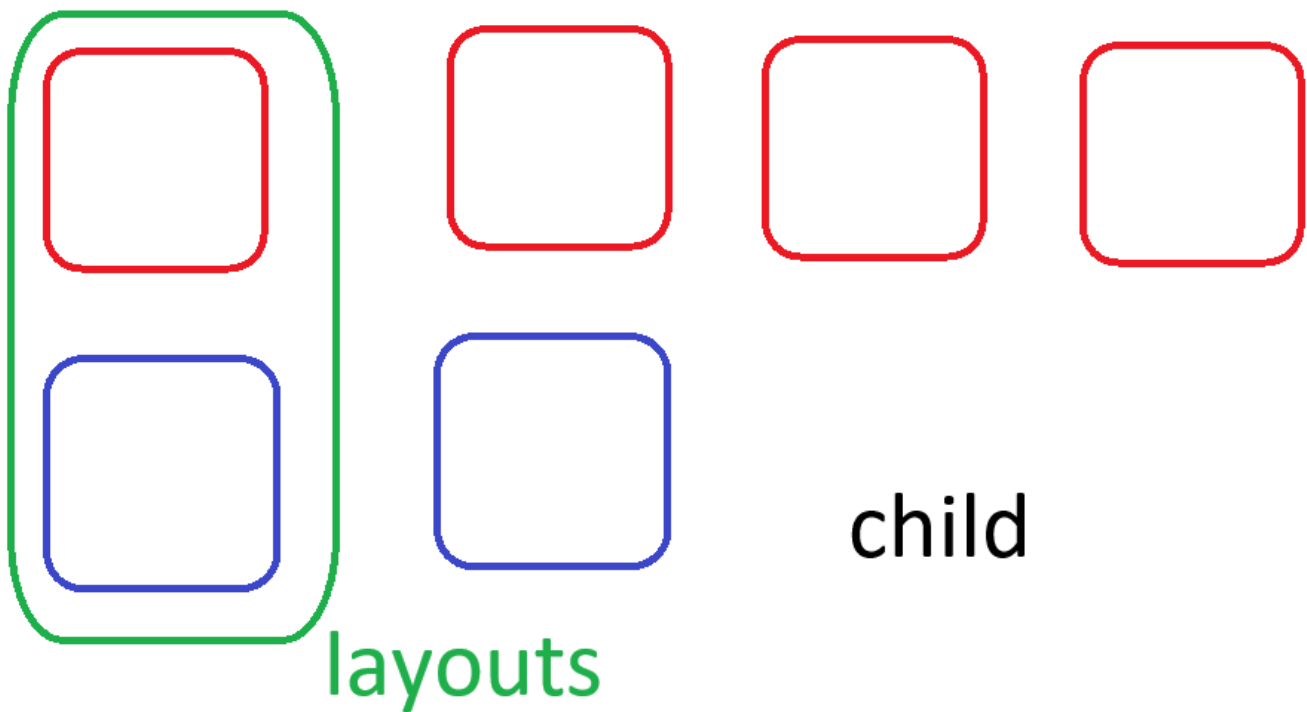

```
1  <!-- resources/views/layouts/app.blade.php -->
2
3  <html>
4      <head>
5          <title>App Name - @yield('title')</title>
6      </head>
7      <body>
8          @section('sidebar')
9              This is the master sidebar.
10         @show
11
12         <div class="container">
13             @yield('content')
14         </div>
15     </body>
16 </html>
```

```
1  <!-- resources/views/child.blade.php -->
2
3  @extends('layouts.app')
4
5  @section('title', 'Page Title')
6
7  @section('sidebar')
8      @parent
9
10     <p>This is appended to the master sidebar.</p>
11 @endsection
12
13 @section('content')
14     <p>This is my body content.</p>
15 @endsection
```
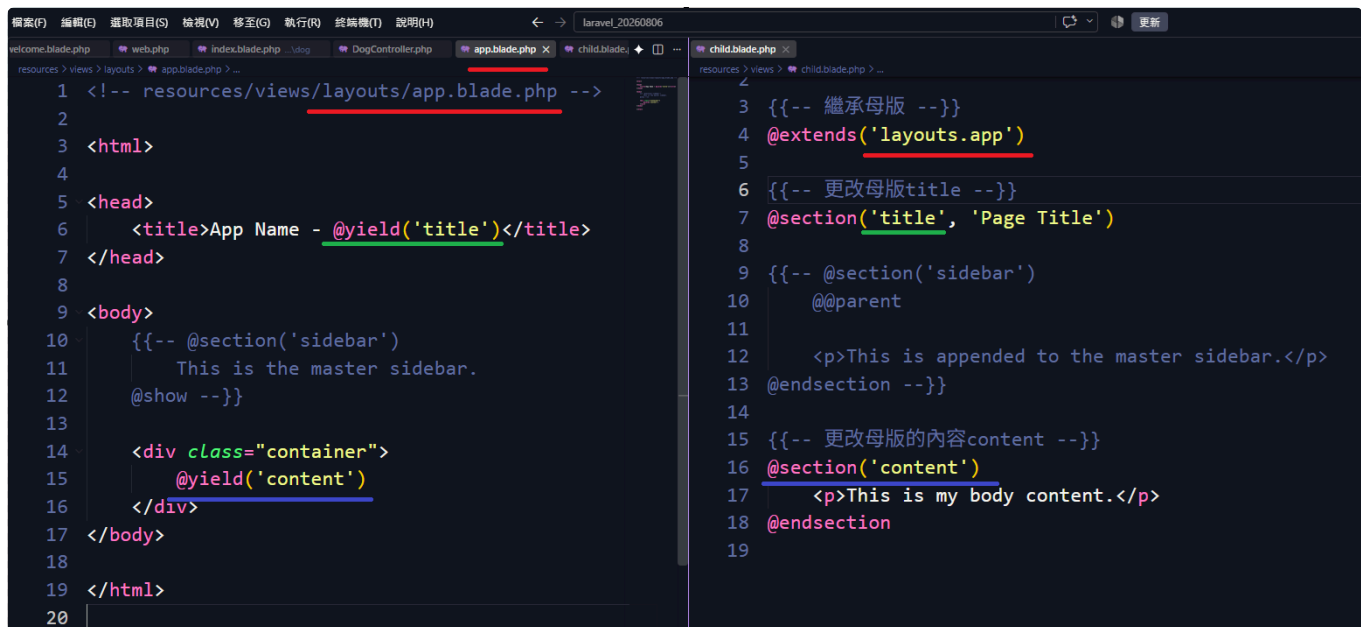
```
1 <!-- resources/views/layouts/app.blade.php -->
2
3 <html>
4
5 <head>
6   <title>App Name - @yield('title')</title>
7 </head>
8
9 <body>
10   {{-- @section('sidebar')
11     This is the master sidebar.
12   @show --}}
13
14   <div class="container">
15     @yield('content')
16   </div>
17 </body>
18
19 </html>
20
```

```
3 {{-- 繼承母版 --}}
4 @extends('layouts.app')
5
6 {{-- 更改母版title --}}
7 @section('title', 'Page Title')
8
9 {{-- @section('sidebar')
10   @parent
11   <p>This is appended to the master sidebar.</p>
12 @endsection --}}
13
14
15 {{-- 更改母版的內容content --}}
16 @section('content')
17   <p>This is my body content.</p>
18 @endsection
19
```

下次 自己建立layouts

layouts

blue / red

child

blue - b1 - b2

red - r1 -r2

Nav-bar

Student

-route

- /students

-controller

- StudentController

-view

- student/index.blade.php

Teacher

Nav-bar

Student

Teacher

-route

- /students

- /teachers

```
php artisan make:controller PhotoController --resource
```

```
php artisan make:controller StudentController --resource
```

```
php artisan make:controller TeacherController --resource
```

```
php artisan route:list
```

```
use App\Http\Controllers\PhotoController;  
Route::resource('photos',  
PhotoController::class);
```

```
use App\Http\Controllers\StudentController;  
Route::resource('students',  
StudentController::class);
```

```
use App\Http\Controllers\TeacherController;  
Route::resource('teachers',  
TeacherController::class);
```

-controller

- StudentController

- TeacherController

-view

- student/index.blade.php

- teacher/index.blade.php


-model

(ps. modal 是bs5的)

php artisan make:model Flight

php artisan make:model Student

可以手動方式建立db

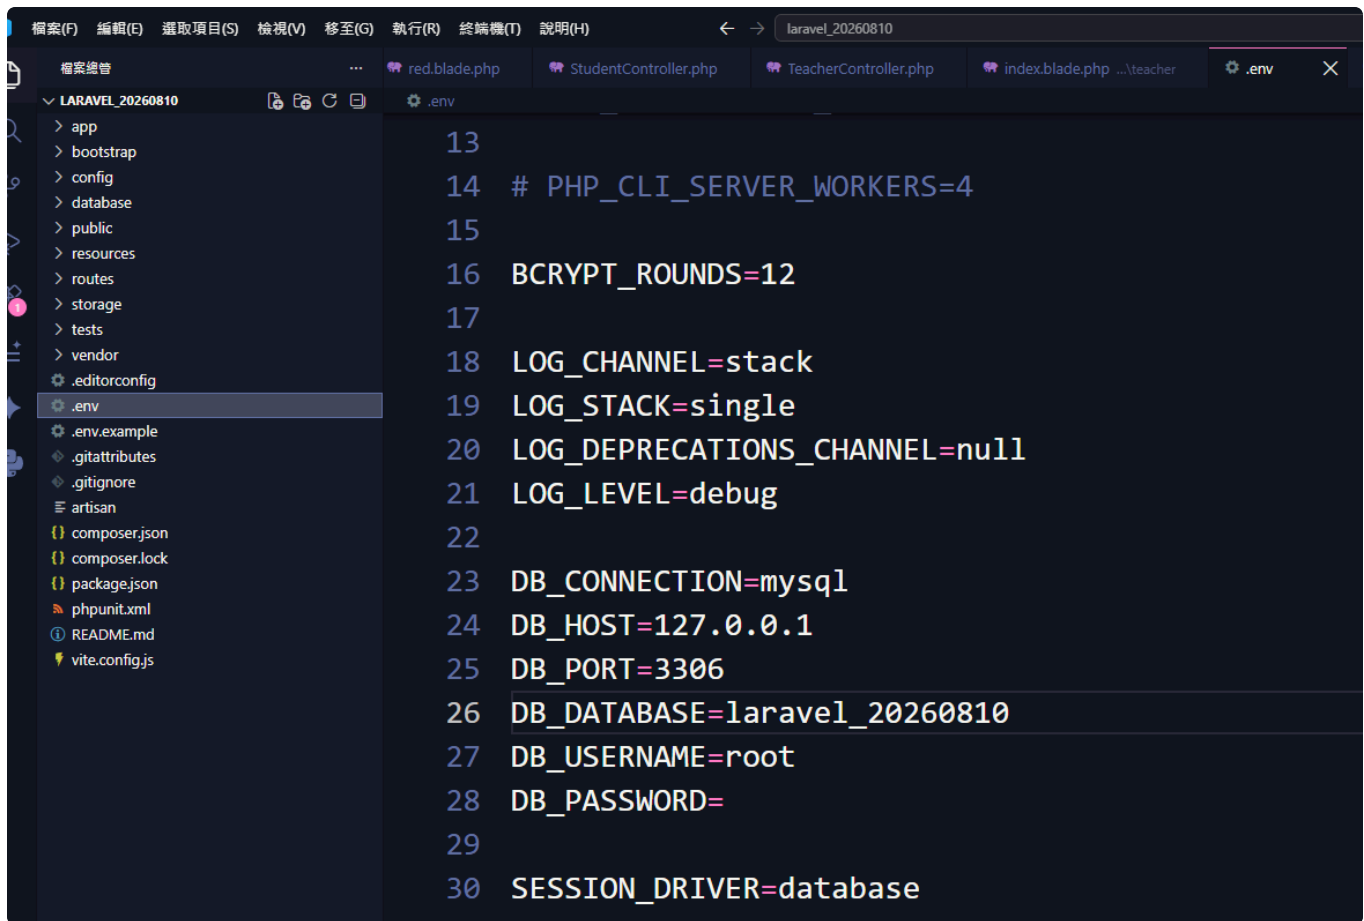

The screenshot shows a code editor with a sidebar on the left displaying the project structure. The main editor area shows the contents of the `.env` file. The sidebar lists the following files and folders: `app`, `bootstrap`, `config`, `database`, `public`, `resources`, `routes`, `storage`, `tests`, `vendor`, `.editorconfig`, `.env` (selected), `.env.example`, `.gitattributes`, `.gitignore`, `artisan`, `composer.json`, `composer.lock`, `package.json`, `phpunit.xml`, `README.md`, and `vite.config.js`. The `.env` file content is as follows:

```
13
14 # PHP_CLI_SERVER_WORKERS=4
15
16 BCRYPT_ROUNDS=12
17
18 LOG_CHANNEL=stack
19 LOG_STACK=single
20 LOG_DEPRECATIONS_CHANNEL=null
21 LOG_LEVEL=debug
22
23 DB_CONNECTION=mysql
24 DB_HOST=127.0.0.1
25 DB_PORT=3306
26 DB_DATABASE=laravel_20260810
27 DB_USERNAME=root
28 DB_PASSWORD=
29
30 SESSION_DRIVER=database
31 SESSION_LIFETIME=120
```

php artisan migrate



The screenshot shows a terminal window with the following output:

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/laravel_20260810
$ php artisan migrate

  INFO  Preparing database.

Creating migration table ..... 7.88ms DONE

  INFO  Running migrations.

0001_01_01_000000_create_users_table ..... 25.04ms DONE
0001_01_01_000001_create_cache_table ..... 20.11ms DONE
0001_01_01_000002_create_jobs_table ..... 26.39ms DONE
```