

project : laravel_20260810

- 1- 安裝
- 2- 設定 xampp
- 3- route
- 4- view
- 5- controller
- 6- route - controller - view

1- 安裝

composer create-project "laravel/laravel:^10.0" example-app

composer create-project "laravel/laravel:^12.0"

laravel_20260810

git bash

2- 設定 xampp

DocumentRoot

"C:/xampp/htdocs/laravel202607/laravel_20260810/public"

<Directory

"C:/xampp/htdocs/laravel202607/laravel_20260810/public">

views/welcome.blade.php

hello 2026-08-10

3- route

```
web.php > Closure
1  <?php
2
3  use Illuminate\Support\Facades\Route;
4
5  // localhost/cars
6  Route::get('/cars', function () {
7      // dd('hello route cars');
8      // return view('welcome');
9      return view('car.index');
10 });
11
```

4- view



The screenshot shows a code editor with a file explorer on the left and a code editor on the right. The file explorer shows the project structure, including the 'views' directory and the 'car' subdirectory. The 'index.blade.php' file is selected. The code editor shows the content of 'index.blade.php', which is '1 hello view car index'.

```
resources > views > car > index.blade.php
1  hello view car index
```

5- controller

php artisan make:controller UserController

php artisan make:controller CarController

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607
$ cd larave1_20260806/

User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$ php artisan make:controller CarController

INFO Controller [C:\xampp\htdocs\larave1202607\larave1_20260806\app\Http\Cont
rollers\CarController.php] created successfully.
```

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$ php artisan make:controller CarController

INFO Controller [C:\xampp\htdocs\larave1202607\larave1_20260806\app\Http\Cont
rollers\CarController.php] created successfully.

User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$ php artisan make:controller CarController

ERROR Controller already exists.

User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$ php artisan make:controller CarController

INFO Controller [C:\xampp\htdocs\larave1202607\larave1_20260806\app\Http\Cont
rollers\CarController.php] created successfully.


User@1113-Teacher MINGW64 /c/xampp/htdocs/larave1202607/larave1_20260806
$
```

route link controller

```
1 use App\Http\Controllers\UserController;
2
3 Route::get('/user/{id}', [UserController::class, 'show']);
```


```
use App\Http\Controllers\UserController;
Route::get('/user/{id}',
[UserController::class, 'show']);
```

```
use App\Http\Controllers\CarController;
Route::get('/cars', [CarController::class,
'index']);
```

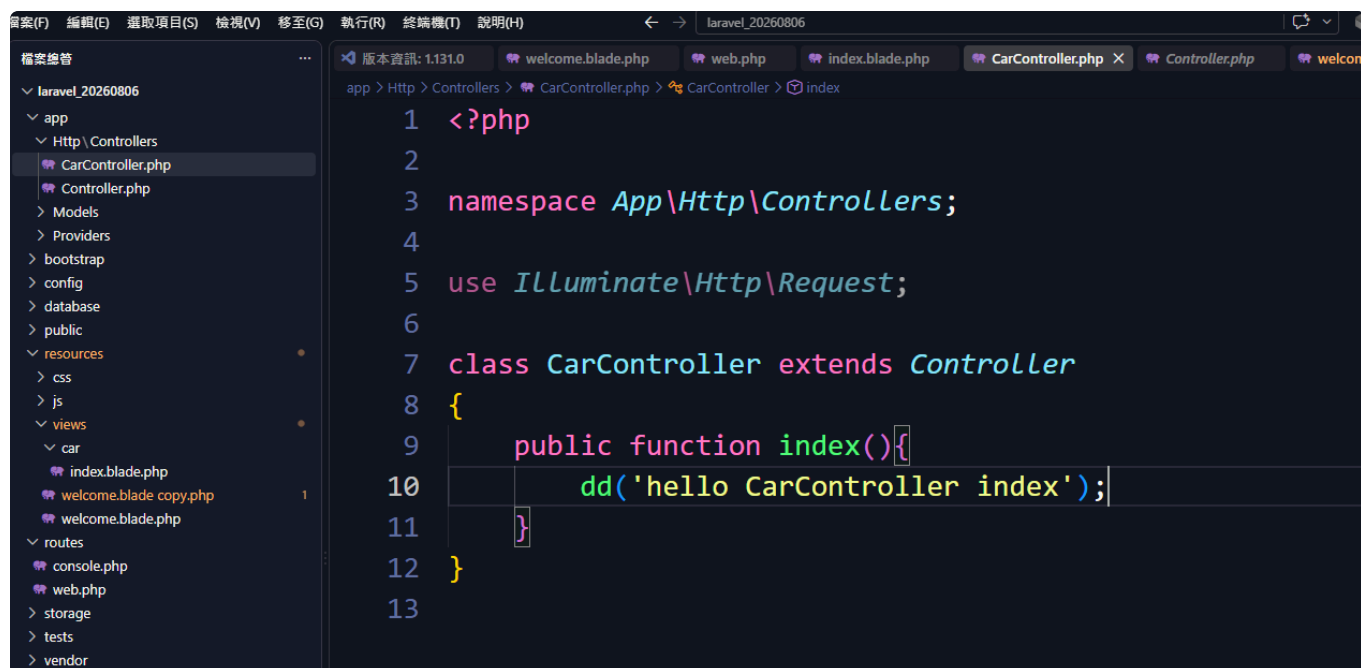


```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CarController extends Controller
8 {
9     public function index(){
10         dd('hello CarController index');
11     }
12 }
13
```

6- route - controller - view

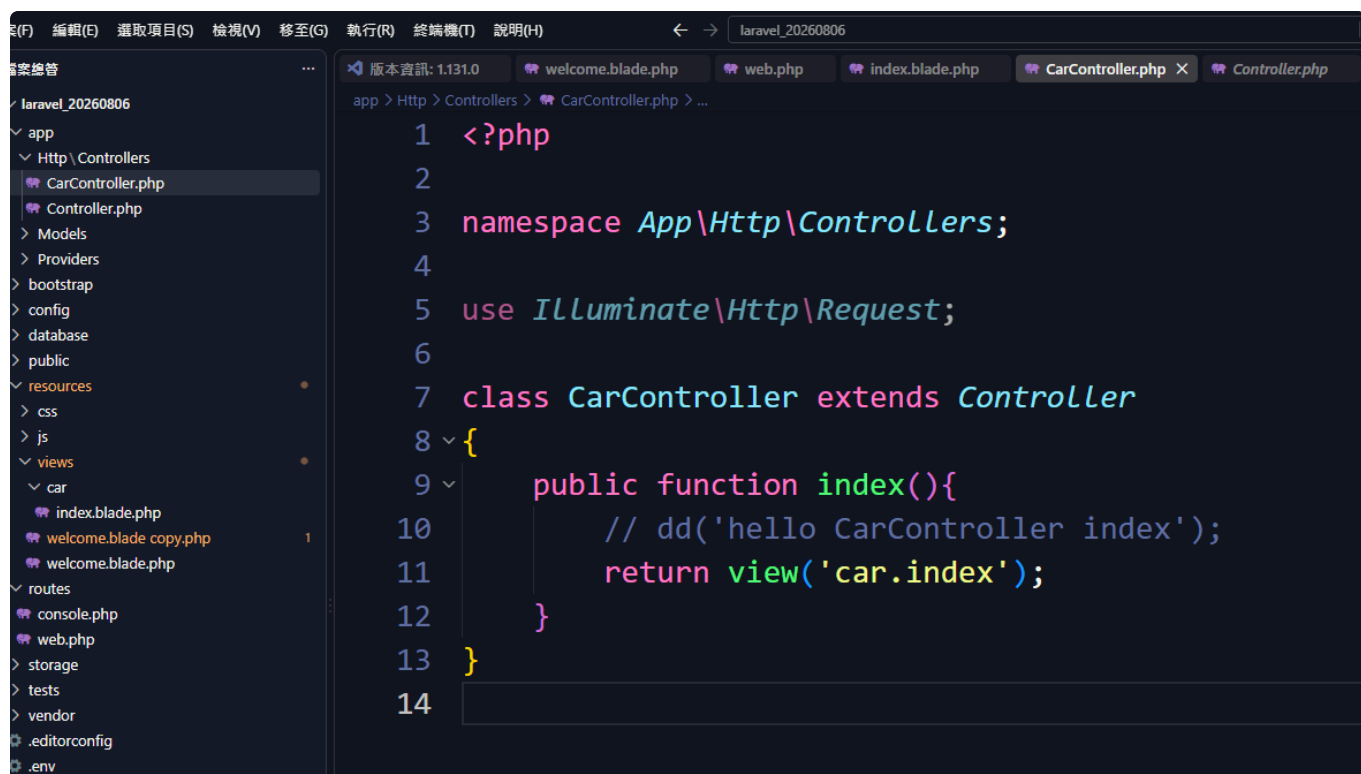


```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CarController extends Controller
8 {
9     public function index(){
10         // dd('hello CarController index');
11         return view('car.index');
12     }
13 }
14
```

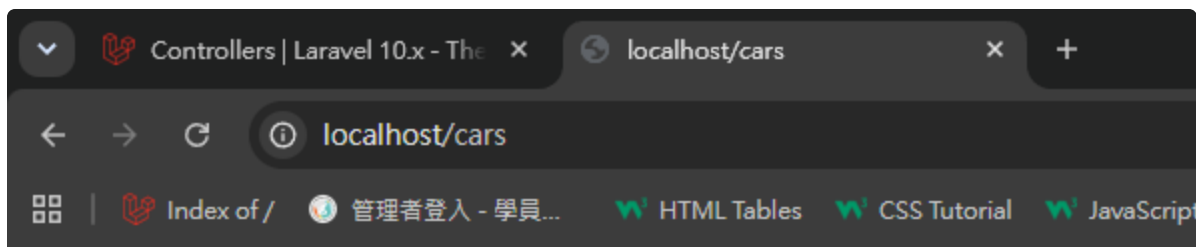

hello view car index

=====

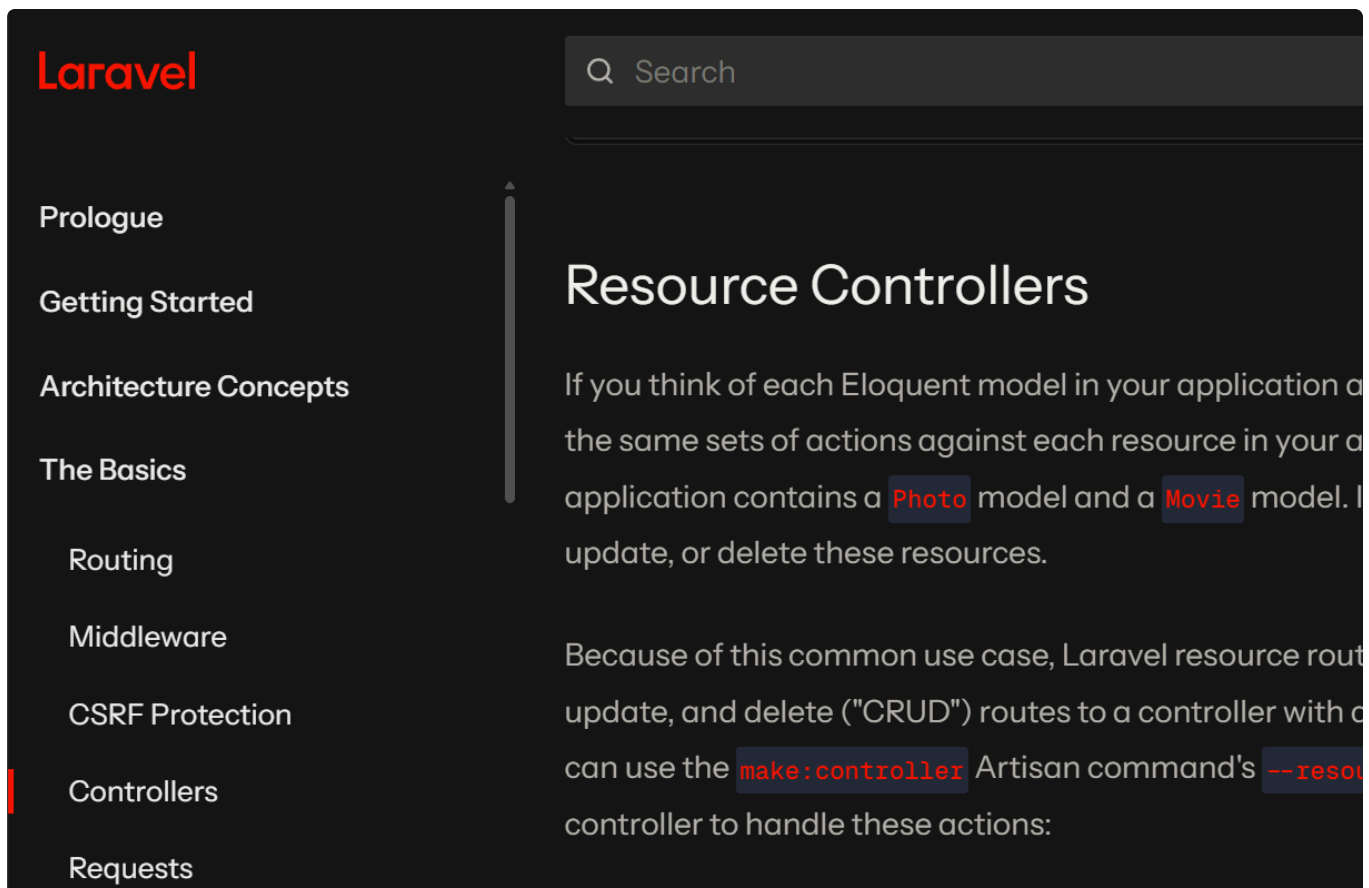


```
php artisan make:controller PhotoController --resource
php artisan make:controller DogController --resource
php artisan make:controller CatController --resource
```

```
use App\Http\Controllers\PhotoController;
Route::resource('photos',
PhotoController::class);

use App\Http\Controllers\DogController;
Route::resource('dogs', DogController::class);

use App\Http\Controllers\CatController;
Route::resource('cats', CatController::class);
```

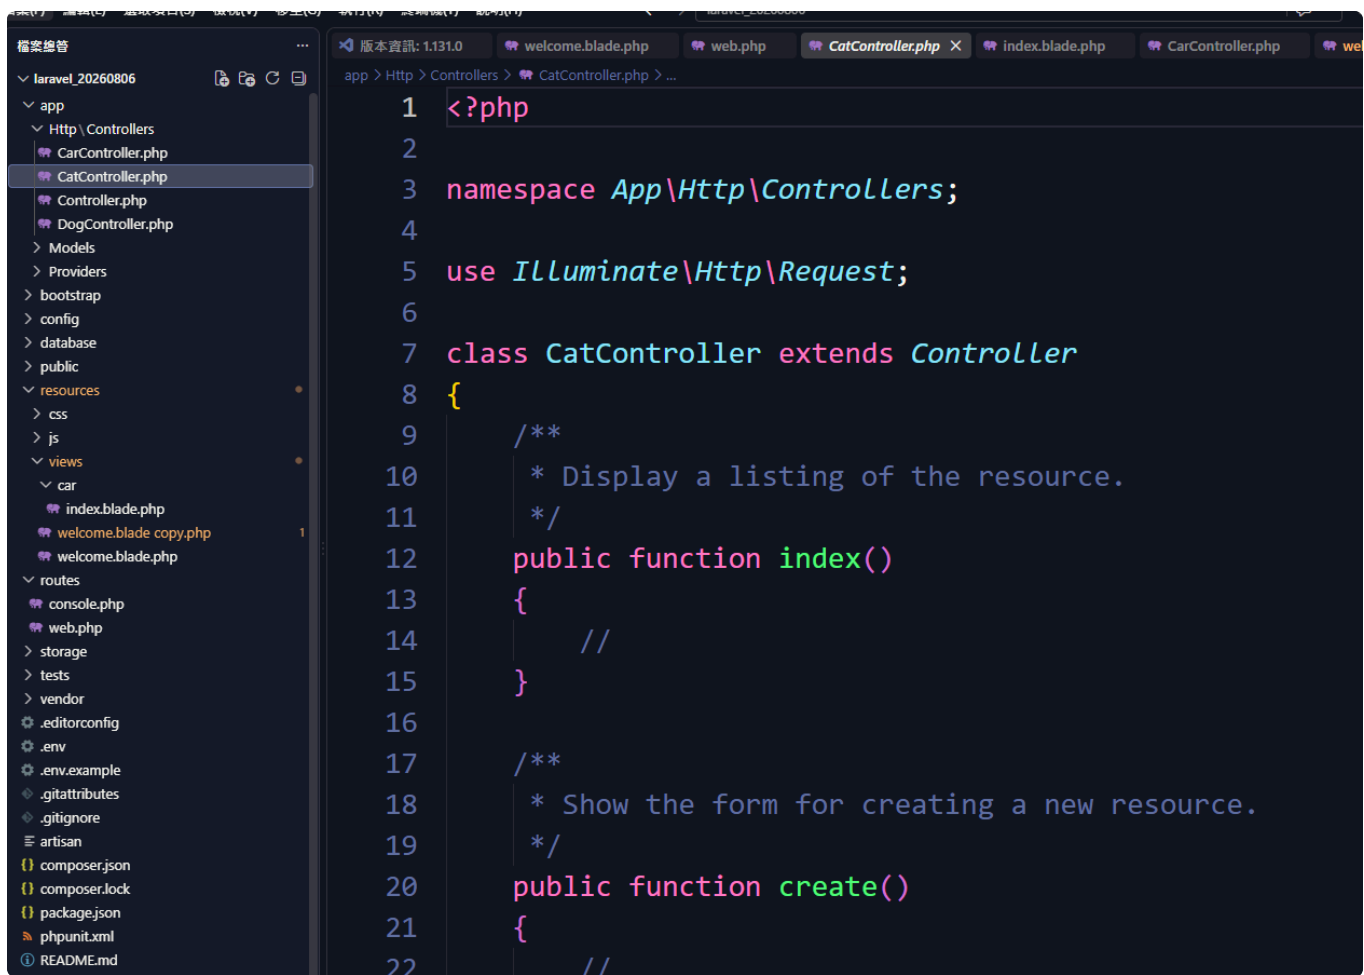

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CatController extends Controller
8 {
9     /**
10      * Display a listing of the resource.
11      */
12     public function index()
13     {
14         //
15     }
16
17     /**
18      * Show the form for creating a new resource.
19      */
20     public function create()
21     {
22         //
```

php artisan route:list


```

User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_20260806
$ php artisan route:list

GET|HEAD      cars ..... cars.index > CarController@index
GET|HEAD      cats ..... cats.index > CatController@index
POST          cats ..... cats.store > CatController@store
GET|HEAD      cats/create ..... cats.create > CatController@create
GET|HEAD      cats/{cat} ..... cats.show > CatController@show
PUT|PATCH    cats/{cat} ..... cats.update > CatController@update
DELETE        cats/{cat} ..... cats.destroy > CatController@destroy
GET|HEAD      cats/{cat}/edit ..... cats.edit > CatController@edit
GET|HEAD      dogs ..... dogs.index > DogController@index
POST          dogs ..... dogs.store > DogController@store
GET|HEAD      dogs/create ..... dogs.create > DogController@create
GET|HEAD      dogs/{dog} ..... dogs.show > DogController@show
PUT|PATCH    dogs/{dog} ..... dogs.update > DogController@update
DELETE        dogs/{dog} ..... dogs.destroy > DogController@destroy
GET|HEAD      dogs/{dog}/edit ..... dogs.edit > DogController@edit
GET|HEAD      storage/{path} storage.local > vendor/laravel/framework/src...
PUT           storage/{path} storage.local.upload > vendor/laravel/framework...
GET|HEAD      up vendor/laravel/framework/src/Illuminate/Foundation/Confi...


```

blade

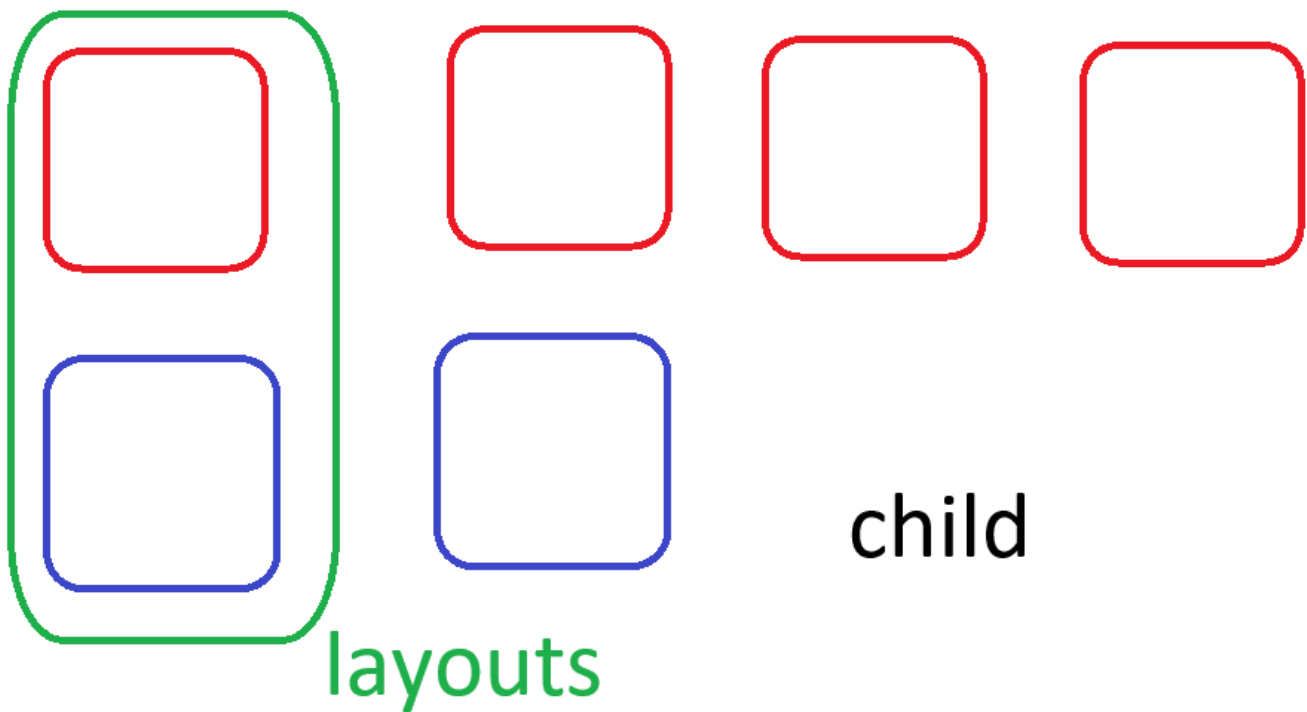

```
1  <!-- resources/views/layouts/app.blade.php -->
2
3  <html>
4      <head>
5          <title>App Name - @yield('title')</title>
6      </head>
7      <body>
8          @section('sidebar')
9              This is the master sidebar.
10         @show
11
12         <div class="container">
13             @yield('content')
14         </div>
15     </body>
16 </html>
```

```
1  <!-- resources/views/child.blade.php -->
2
3  @extends('layouts.app')
4
5  @section('title', 'Page Title')
6
7  @section('sidebar')
8      @@parent
9
10     <p>This is appended to the master sidebar.</p>
11 @endsection
12
13 @section('content')
14     <p>This is my body content.</p>
15 @endsection
```
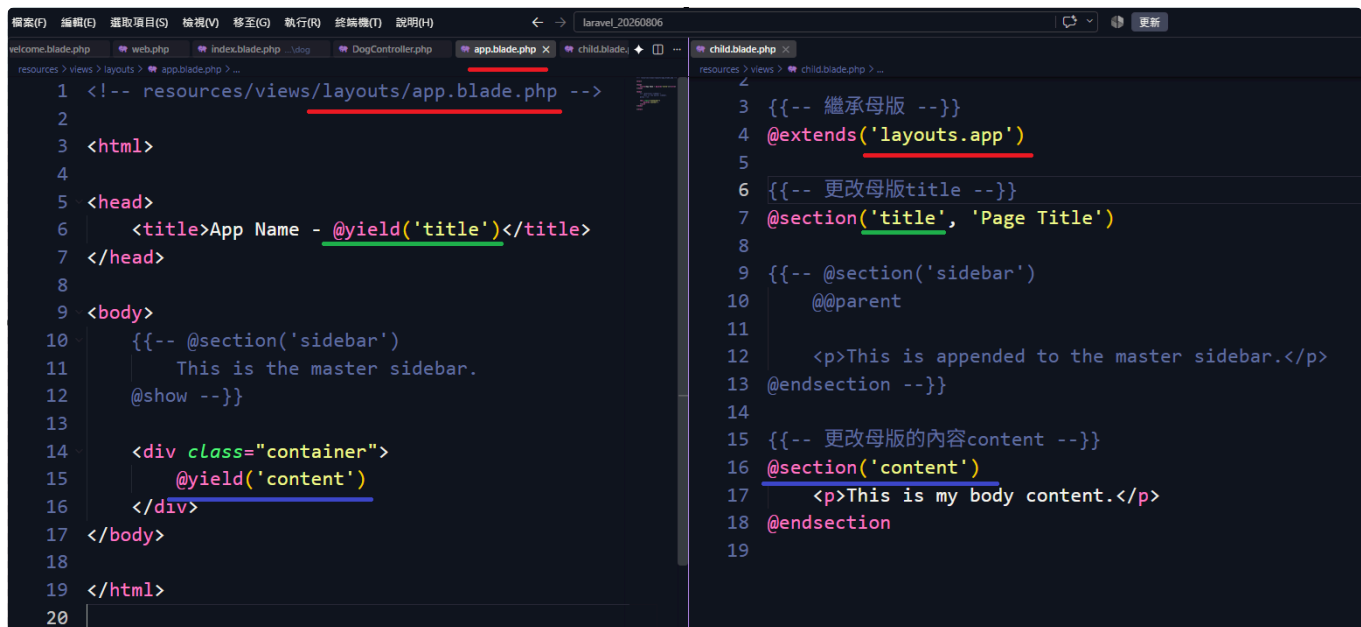
```
1 <!-- resources/views/layouts/app.blade.php -->
2
3 <html>
4
5 <head>
6   <title>App Name - @yield('title')</title>
7 </head>
8
9 <body>
10   {{-- @section('sidebar')
11     This is the master sidebar.
12   @show --}}
13
14   <div class="container">
15     @yield('content')
16   </div>
17 </body>
18
19 </html>
20
```

```
3 {{-- 繼承母版 --}}
4 @extends('layouts.app')
5
6 {{-- 更改母版title --}}
7 @section('title', 'Page Title')
8
9 {{-- @section('sidebar')
10   @parent
11   <p>This is appended to the master sidebar.</p>
12 @endsection --}}
13
14
15 {{-- 更改母版的內容content --}}
16 @section('content')
17   <p>This is my body content.</p>
18 @endsection
19
```

下次 自己建立layouts

layouts

blue / red

child

blue - b1 - b2

red - r1 -r2

Nav-bar

Student

-route

- /students

-controller

- StudentController

-view

- student/index.blade.php

Teacher

Nav-bar

Student

Teacher

-route

- /students

- /teachers

```
php artisan make:controller PhotoController --resource
```

```
php artisan make:controller StudentController --resource
```

```
php artisan make:controller TeacherController --resource
```

```
php artisan route:list
```

```
use App\Http\Controllers\PhotoController;  
Route::resource('photos',  
PhotoController::class);
```

```
use App\Http\Controllers\StudentController;  
Route::resource('students',  
StudentController::class);
```

```
use App\Http\Controllers\TeacherController;  
Route::resource('teachers',  
TeacherController::class);
```

-controller

- StudentController

- TeacherController

-view

- student/index.blade.php

- teacher/index.blade.php



-model

(ps. modal 是bs5的)

php artisan make:model Flight

php artisan make:model Student

可以手動方式建立db

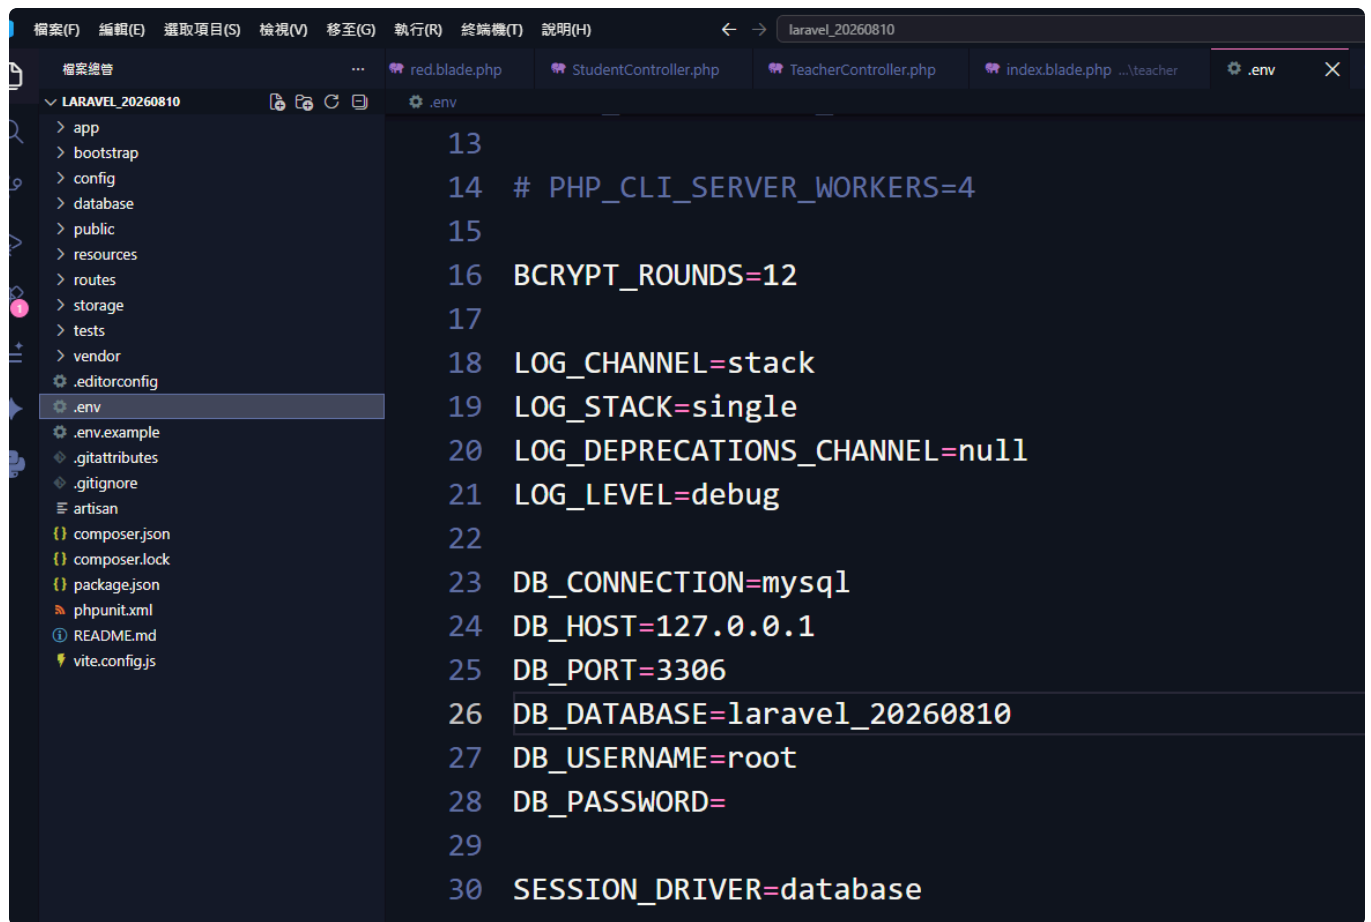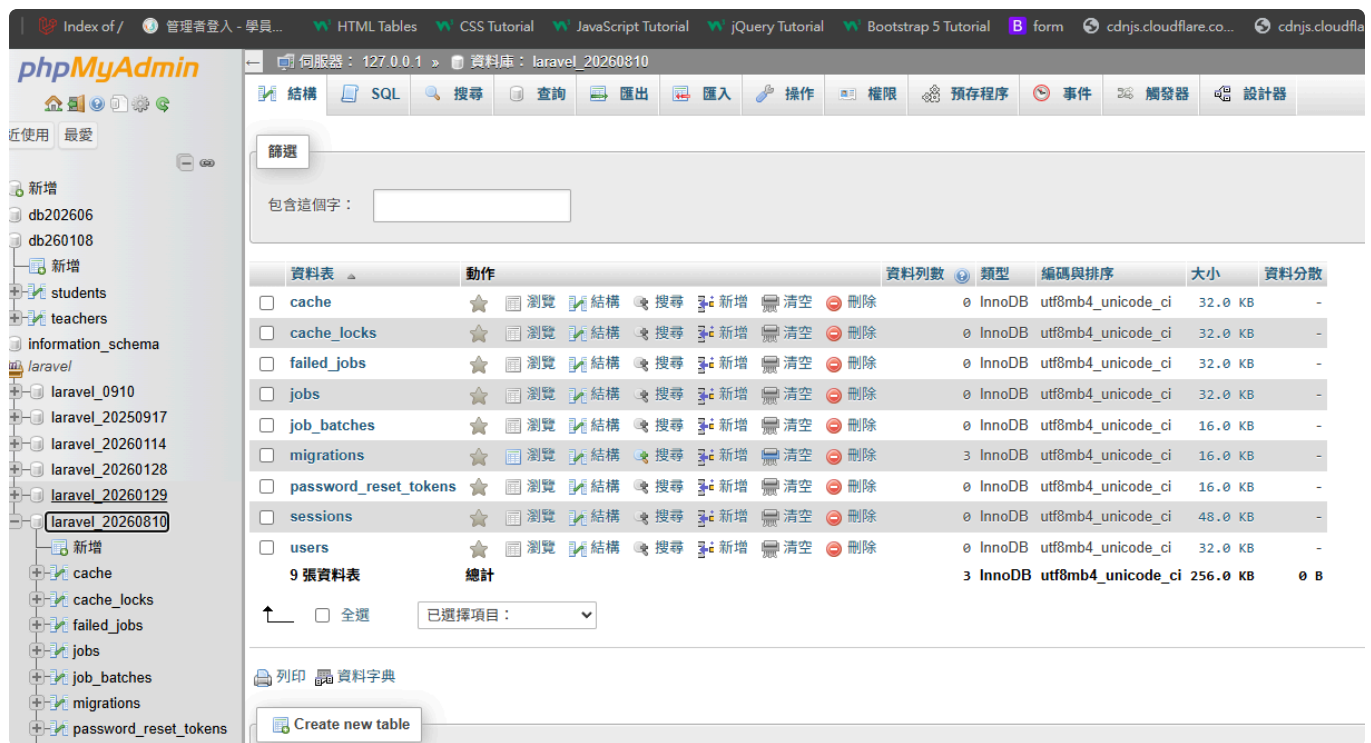

php artisan migrate

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/laravel_20260810
$ php artisan migrate

INFO Preparing database.


Creating migration table ..... 7.88ms DONE

INFO Running migrations.

0001_01_01_000000_create_users_table ..... 25.04ms DONE
0001_01_01_000001_create_cache_table ..... 20.11ms DONE
0001_01_01_000002_create_jobs_table ..... 26.39ms DONE
```

laravel file

8700檔案 git push ?? 會太大嗎?

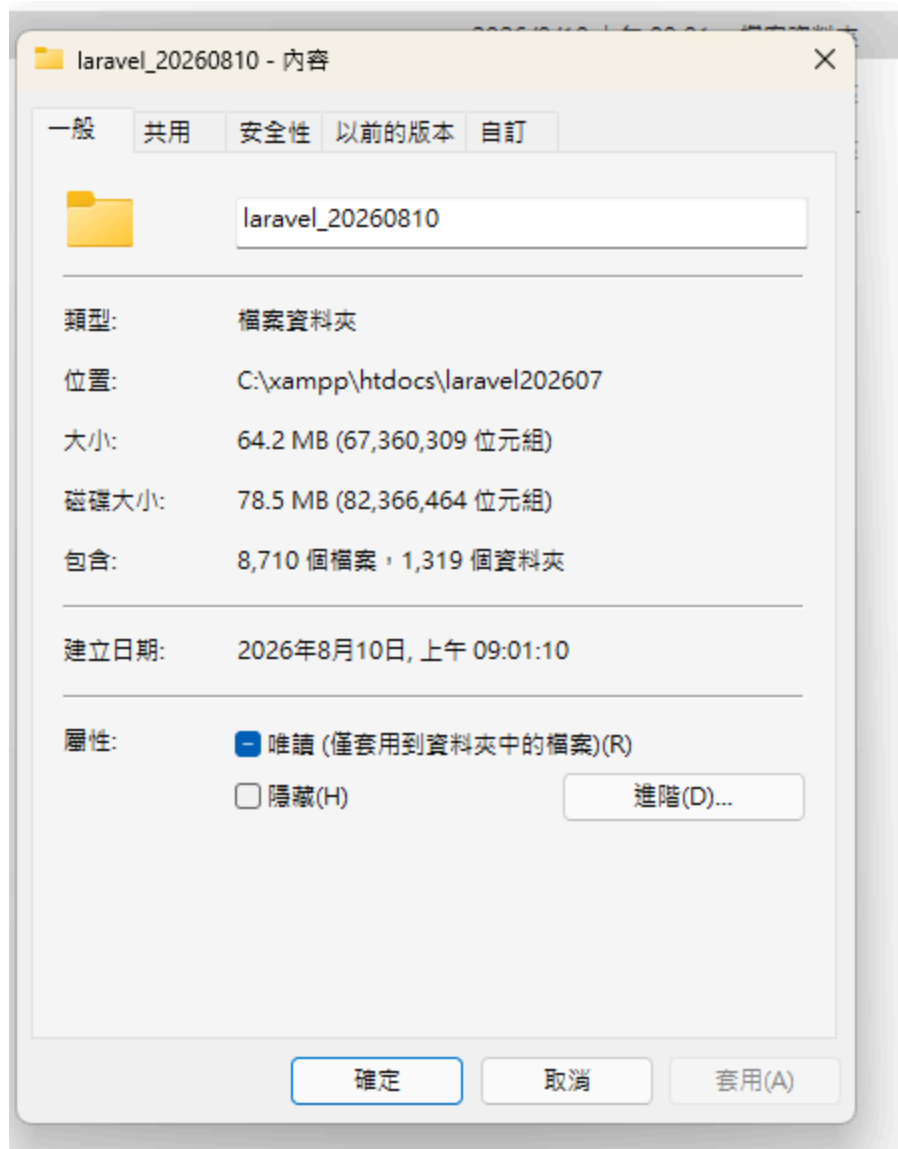

git clone


https://github.com/chengkk0910/laravel_20260810.git

laravel_s20260810

git clone

https://github.com/chengkk0910/laravel_20260810.git

laravel_download_20260810

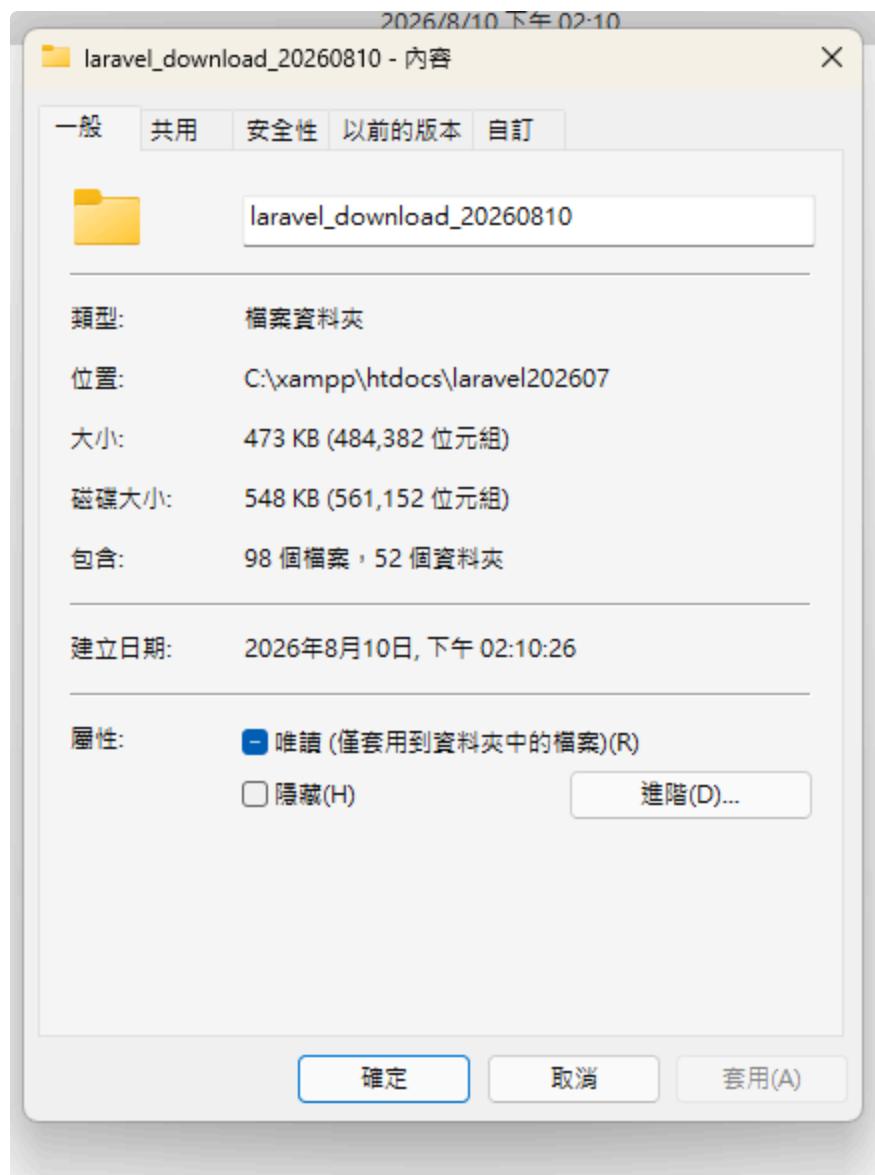

- 1.github create repository 記得add readme 一定要打勾
- 2.git clone
- 3.laravel copy to clone folder
- 4.git add .

5.git commit -m"laravel init"

6.git push

7.git clone changename_laravel.....

看看資料夾是否change 檔案變少了

The screenshot shows the GitHub 'Create a new repository' interface. It is divided into two sections: 'General' and 'Configuration'. In the 'General' section, the 'Owner' is 'chengkk0910' and the 'Repository name' is 'laravel_0810_02', which is confirmed as available. A description 'laravel_0810_02' is entered. The 'Configuration' section includes 'Choose visibility' set to 'Public', 'Start with a template' set to 'No template', 'Add README' which is turned 'On', and 'Add .gitignore' set to 'No .gitignore'.

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1 General

Owner * / Repository name *

chengkk0910 / laravel_0810_02

✔ laravel_0810_02 is available.

Great repository names are short and memorable. How about [congenial-computing-machine](#)?

Description

laravel_0810_02

15 / 350 characters

2 Configuration

Choose visibility *
Choose who can see and commit to this repository

Public

Start with a template
Templates pre-configure your repository with files.

No template

Add README
READMEs can be used as longer descriptions. [About READMEs](#)

On

Add .gitignore

No .gitignore

```
INSERT INTO _target_table_ (_column1_,  
_column2_, _column3_, ...)  
SELECT _column1_, _column2_, _column3_, ...  
FROM _source_table_
```

```
WHERE _condition_;
```

```
public function store(Request $request):  
    $flight = new Flight;  
    $flight->name = $request->name;  
    $flight->save();
```

原生PHP

- 1 db
- 2 table
- 3 select
- 4 html table

laravel

- 1 setting db env
- 2 官網 db
- 3 記得user Facades\DB
- 4 foreach data 要使用 物件導向 ->

```
$data['id']  
$data.id  
$data->id
```



```
$data['run']()  
$data.run()  
$data->run()
```

A screenshot of a code editor with a dark background. The code is written in PHP and is numbered from 1 to 7 on the left side. The code uses the Illuminate\Support\Facades\DB facade to select all users from a database and iterate over the results to echo their names. A small icon of two overlapping squares is visible in the top right corner of the code editor area.


```
1 use Illuminate\Support\Facades\DB;  
2  
3 $users = DB::select('select * from users');  
4  
5 foreach ($users as $user) {  
6     echo $user->name;  
7 }
```

git clone

https://github.com/chengkk0910/laravel_20260810.git

lara_kai_s20260810

laravel git clone

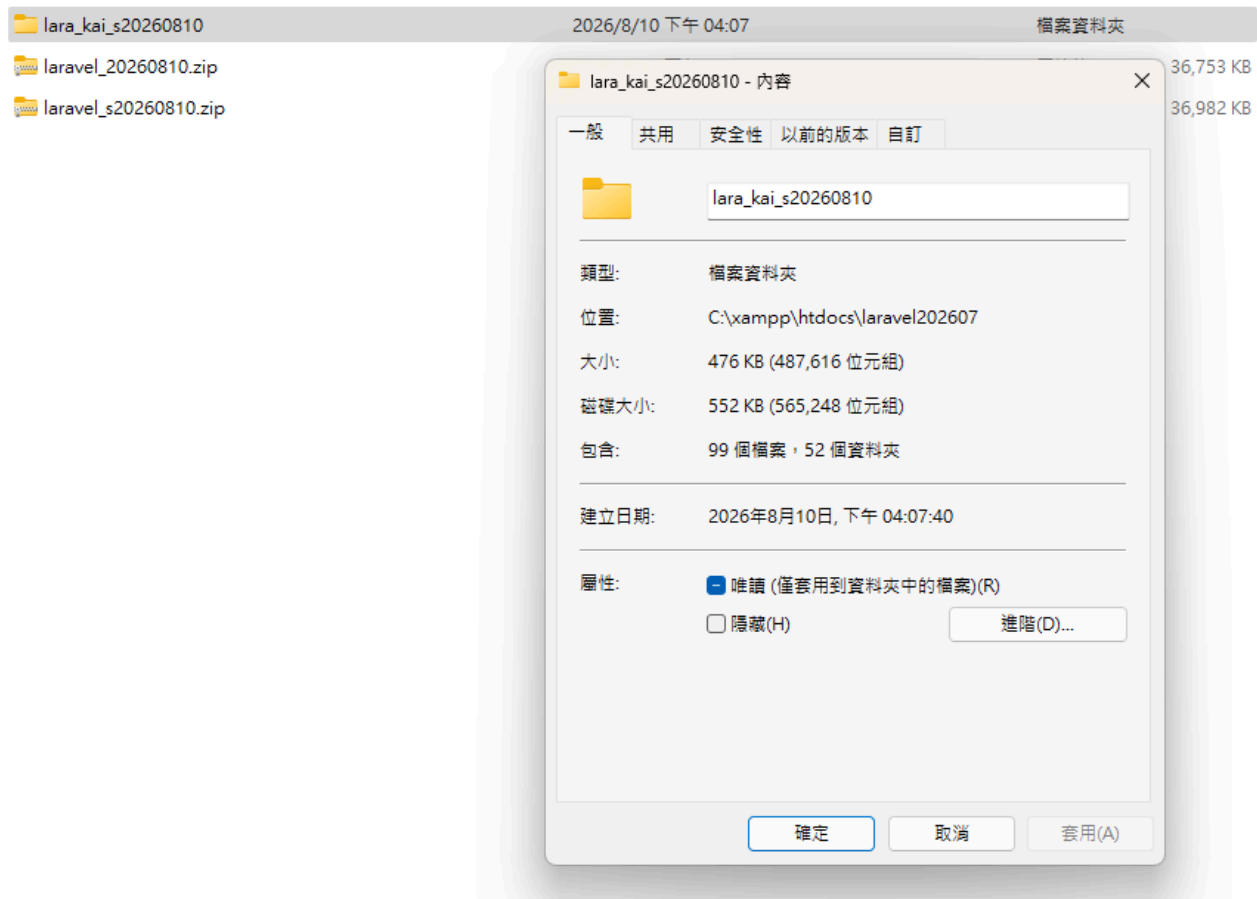

1. Run `git clone 'link projer github'`

2. Run `composer install`

3. Run `cp .env.example .env` or `copy .env.example .env`

4. Run `php artisan key:generate`

5. Run `php artisan migrate`

-1 git clone <專案網址>

-2 cd <專案目錄>

-3 composer install

-4 cp .env.example .env

-5 php artisan key:generate


-6 (手動設定 .env 資料庫連線資訊)

-7 php artisan migrate

-8 xampp

-9 資料庫是否有資料 要匯入

透過composer install 檔案變多了

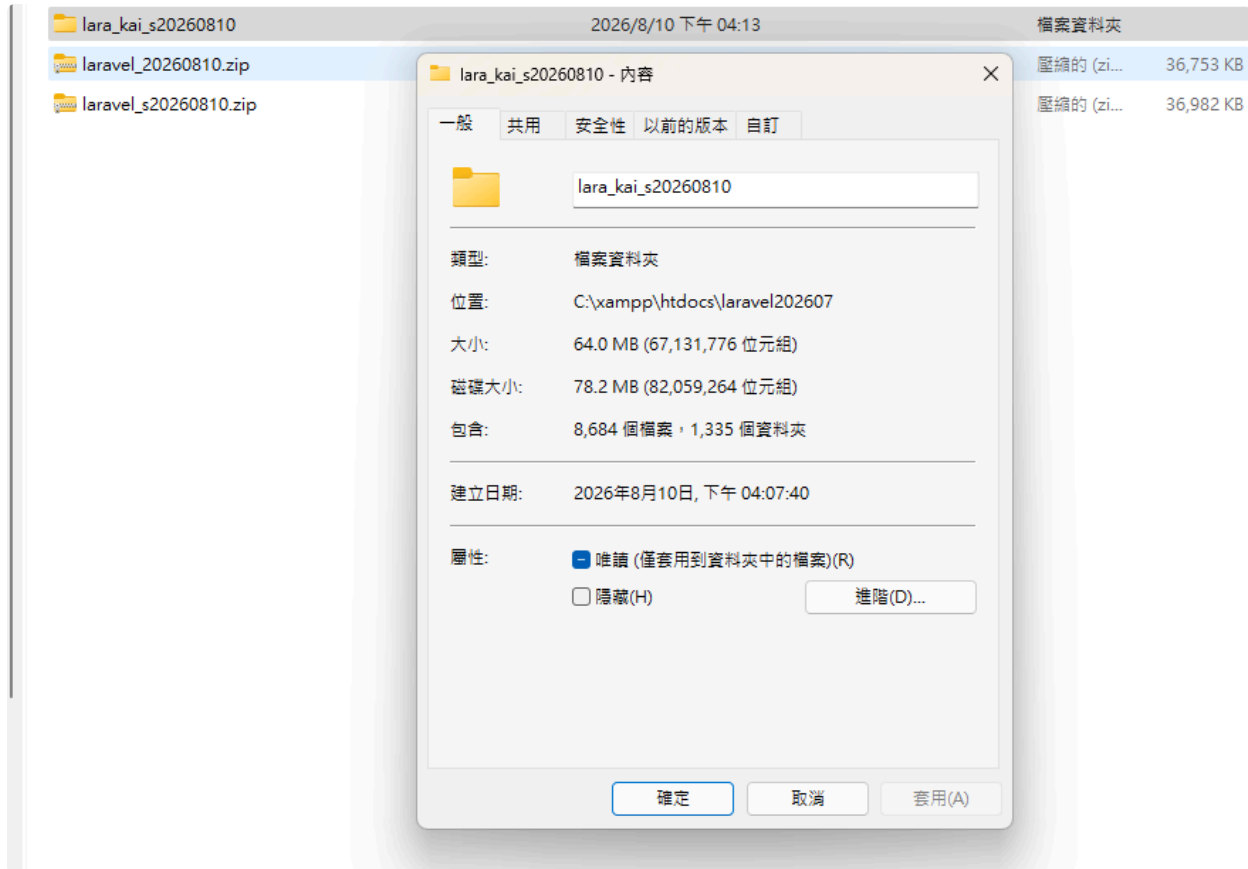

```
23 DB_CONNECTION=mysql
24 DB_HOST=127.0.0.1
25 DB_PORT=3306
26 DB_DATABASE=laravel_20260810
27 DB_USERNAME=root
28 DB_PASSWORD=
29
```

DocumentRoot

"C:/xampp/htdocs/laravel202607/laravel_s20260810/public"

<Directory

"C:/xampp/htdocs/laravel202607/laravel_s20260810/public">

DocumentRoot

"C:/xampp/htdocs/laravel202607/lara_kai_s20260810/public"

<Directory

"C:/xampp/htdocs/laravel202607/lara_kai_s20260810/public">