

project : laravel_20260810

- 1- 安裝
- 2- 設定 xampp
- 3- route
- 4- view
- 5- controller -r
- 6- route - controller - view
- 7- model

- 1- 安裝

composer create-project "laravel/laravel:^10.0" example-app

composer create-project "laravel/laravel:^12.0"

laravel_20260812

git bash

- 2- 設定 xampp

DocumentRoot

"C:/xampp/htdocs/laravel202607/laravel_20260810/public"

<Directory

"C:/xampp/htdocs/laravel202607/laravel_20260810/public">

views/welcome.blade.php

hello 2026-08-10

3- route

```
web.php > Closure
1  <?php
2
3  use Illuminate\Support\Facades\Route;
4
5  // localhost/cars
6  Route::get('/cars', function () {
7      // dd('hello route cars');
8      // return view('welcome');
9      return view('car.index');
10 });
11
```

4- view



The screenshot shows a code editor with a file explorer on the left and a code editor on the right. The file explorer shows the following structure:

- laravel_20260806
 - app
 - bootstrap
 - config
 - database
 - public
 - resources
 - css
 - js
 - views
 - car
 - index.blade.php
 - welcome.blade copy.php
 - welcome.blade.php
 - routes

The code editor on the right shows the content of index.blade.php:

```
1  hello view car index
```

5- controller

php artisan make:controller PhotoController --resource

php artisan make:controller CarController --resource

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/laravel_20260812
$ php artisan route:list


GET|HEAD      cars ..... cars.index > CarController@index
POST         cars ..... cars.store > CarController@store
GET|HEAD      cars/create ..... cars.create > CarController@create
GET|HEAD      cars/{car} ..... cars.show > CarController@show
PUT|PATCH    cars/{car} ..... cars.update > CarController@update
DELETE       cars/{car} ..... cars.destroy > CarController@destroy
GET|HEAD      cars/{car}/edit ..... cars.edit > CarController@edit
GET|HEAD      storage/{path} storage.local > vendor/laravel/framework/src/Illum...
PUT          storage/{path} storage.local.upload > vendor/laravel/framework/sr...
GET|HEAD      up vendor/laravel/framework/src/Illuminate/Foundation/Configurati...

Showing [10] routes
```

route link controller


```
use App\Http\Controllers\PhotoController;
Route::resource('photos',
PhotoController::class);
use App\Http\Controllers\CarController;
Route::resource('cars', CarController::class);
```

6- route - controller - view

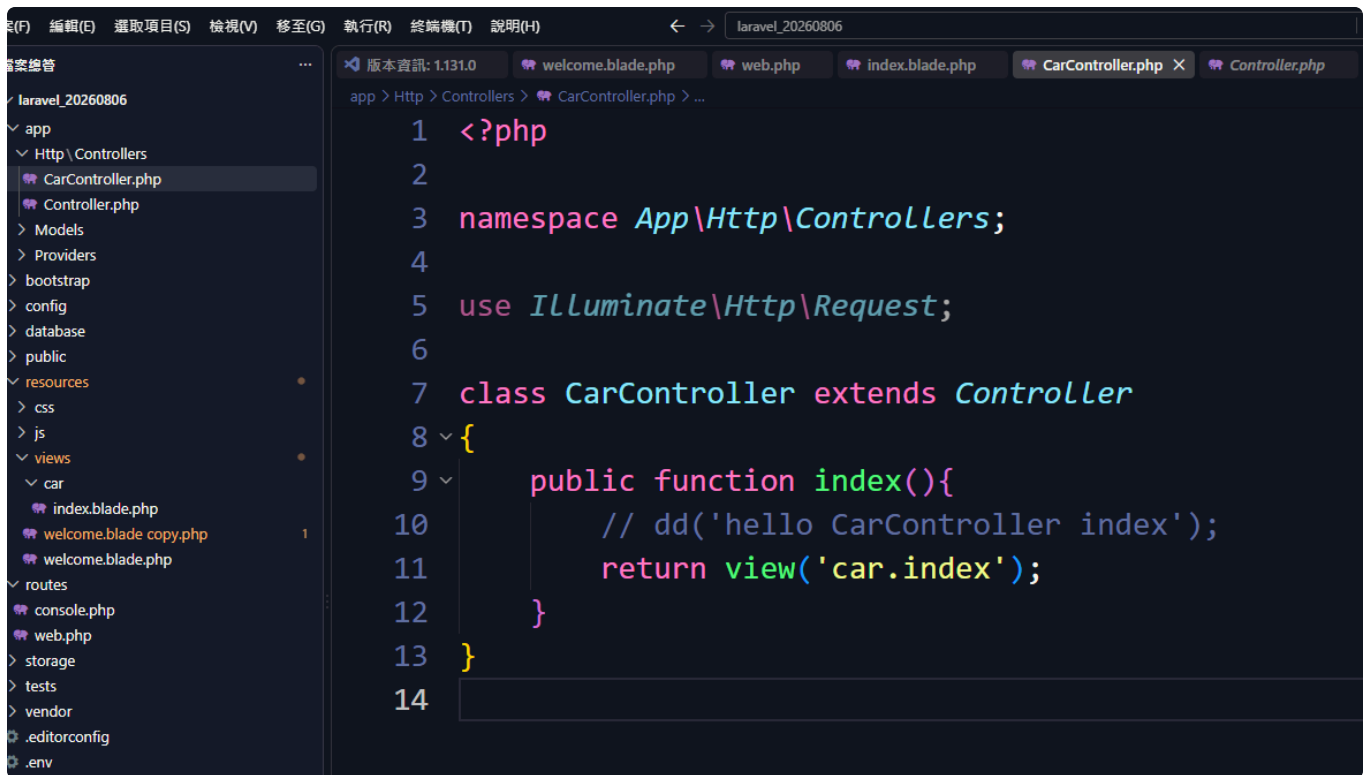

The screenshot shows a code editor with a sidebar on the left displaying the project structure. The main editor area shows the contents of `CarController.php`. The code is as follows:

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CarController extends Controller
8 {
9     public function index(){
10         // dd('hello CarController index');
11         return view('car.index');
12     }
13 }
14
```

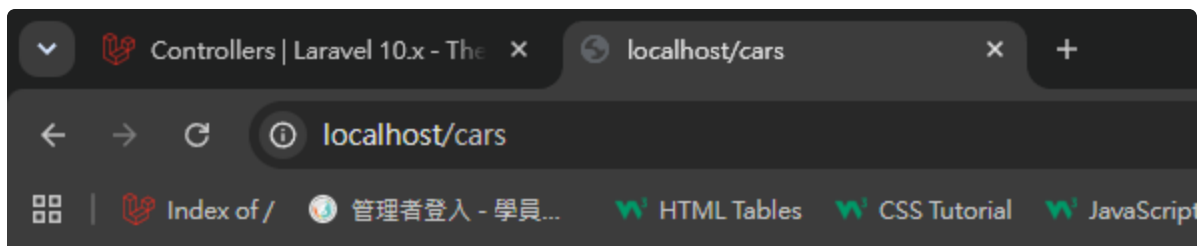

hello view car index

7- model

```
php artisan make:model Flight
php artisan make:model Car
```

8- db

xampp

phpMyAdmin db laravel_20260812

```
.env
DB_CONNECTION=mysql
DB_HOST=127.0.0.1
DB_PORT=3306
DB_DATABASE=laravel_20260812
DB_USERNAME=root
DB_PASSWORD=
```

```
php artisan migrate
```

old

```
23 DB_CONNECTION=sqlite
24 DB_HOST=127.0.0.1
25 DB_PORT=3306
26 DB_DATABASE=laravel
27 DB_USERNAME=root
28 DB_PASSWORD=
```

改成以下

```
3 DB_CONNECTION=mysql
4 DB_HOST=127.0.0.1
5 DB_PORT=3306
6 DB_DATABASE=laravel_20260812
7 DB_USERNAME=root
8 DB_PASSWORD=
```

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/laravel_20260812
$ php artisan make:model Car
```

INFO Model [C:\xampp\htdocs\laravel202607\laravel_20260812\app\Models\Car.php] created successfully.

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/laravel_20260812
$ php artisan migrate
```

INFO Preparing database.

Creating migration table 104.20ms **DONE**

INFO Running migrations.

0001_01_01_000000_create_users_table 60.28ms **DONE**
0001_01_01_000001_create_cache_table 20.24ms **DONE**
0001_01_01_000002_create_jobs_table 41.09ms **DONE**

phpMyAdmin

伺服器: 127.0.0.1 > 資料庫: laravel_20260812

結構 SQL 搜尋 查詢 匯出 匯入 操作 權限 預存程序 事件 觸發器 設計器

包含這個字:

資料表	動作	資料列數	類型	編碼與排序	大小	資料分散
☐ cache	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
☐ cache_locks	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
☐ failed_jobs	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
☐ jobs	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
☐ job_batches	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	16.0 KB	-
☐ migrations	★ 瀏覽 結構 搜尋 新增 清空 刪除	3	InnoDB	utf8mb4_unicode_ci	16.0 KB	-
☐ password_reset_tokens	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	16.0 KB	-
☐ sessions	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	48.0 KB	-
☐ users	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
9 張資料表 總計		3	InnoDB	utf8mb4_unicode_ci	256.0 KB	0 B

↑ ☐ 全選 已選擇項目:

列印 資料字典

Create new table

資料表名稱 欄位數

4 建立

git clone

https://github.com/chengkk0910/laravel_20260812.git

laravel_s20260812

- 1 git clone <專案網址>
- 2 cd <專案目錄>
- 3 composer install
- 4 cp .env.example .env
- 5 php artisan key:generate
- 6 (手動設定 .env 資料庫連線資訊)
- 7 php artisan migrate
- 8 xampp
- 9 資料庫是否有資料 要匯入