

1.找larave.com 國外版下載(不要中文的)



Laravel

<https://laravel.com> · [翻譯這個網頁](#) ⋮

Laravel - The clean stack for Artisans and agents

A framework for developers and agents. **Laravel** has opinions on everything: routing, queues, authentication, and more. That's thousands of decisions an agent ...

Installation

Laravel is a PHP web application framework with expressive ...




Cloud

Laravel Cloud offers both MySQL databases and Serverless ...



2.確認xampp版本 > 找到對應larave版本下載安裝




```
XAMPP for Windows

Setting environment for using XAMPP for Windows.
User@1113-01 d:\Xampp
# php -v
PHP 8.2.12 (cli) (built: Oct 24 2023 21:15:15) (ZTS Visual C++ 2019 x64)
Copyright (c) The PHP Group
Zend Engine v4.2.12, Copyright (c) Zend Technologies

User@1113-01 d:\Xampp
# |
```

3.使用Git Bash 確認是否有安裝過composer

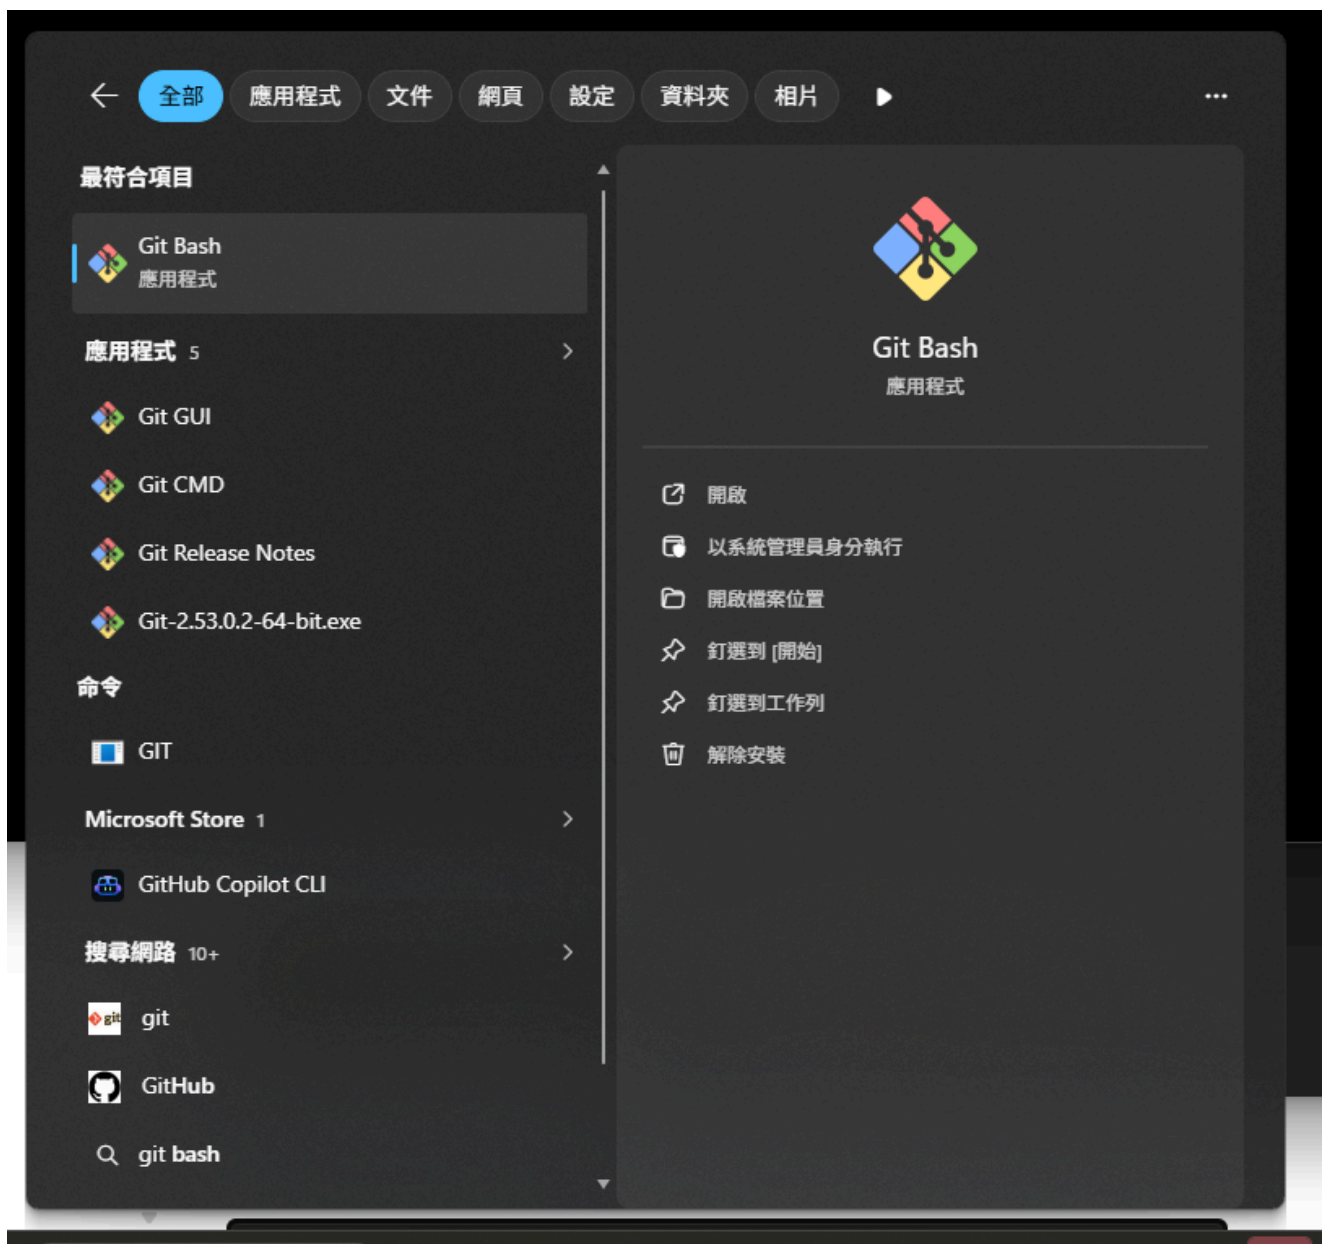

4.輸入composer 結果顯示未安裝 去搜尋並安裝

```
MINGW64:/c/Users/User

User@1113-01 MINGW64 ~
$ COMPOSER
bash: COMPOSER: command not found

User@1113-01 MINGW64 ~
$
```



A Dependency Manager for PHP

Latest: **2.10.2** ([changelog](#))

[Getting Started](#)

[Download](#)

[Documentation](#)

[Browse Packages](#)

[Issues](#)

[GitHub](#)

Authors: [Nils Adermann](#), [Jordi Boggiano](#) and many [community contributions](#)

Commercial support & consulting available through:

 **PRIVATE PACKAGIST**

[Sponsor Composer & Packagist.org](#)

Logo by: [Max Grigorian](#)



Download Composer

Latest: v2.10.2



PRIVATE PACKAGIST

Secure & reliable package repository

Windows Installer

The installer - which requires that you have PHP already installed - will download Composer for you and set up your PATH environment variable so you can simply call `composer` from any directory.

Download and run [Composer-Setup.exe](#) - it will install the latest composer version whenever it is executed.

Command-line installation

To quickly install Composer in the current directory, run the following script in your terminal. To automate the installation, use [the guide on installing Composer programmatically](#).

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
php -r "if (hash_file('sha384', 'composer-setup.php') === 'c8b085408188070d5f52bcfe4ecfbee5f727afa458b2573b8eae
php composer-setup.php
php -r "unlink('composer-setup.php');"
```

This installer script will simply check some `php.ini` settings, warn you if they are set incorrectly, and then download the latest `composer.phar` in the current directory. The 4 lines above will, in order:

- Download the installer to the current directory
- Verify the installer SHA-384, which you can also [cross-check here](#)
- Run the installer
- Remove the installer


Most likely, you want to put the `composer.phar` into a directory on your PATH, so you can simply call `composer` from any directory (Global install), using for example:

```
sudo mv composer.phar /usr/local/bin/composer
```


For details, [see the instructions on how to install Composer globally](#).







you have PHP already installed - will download Composer for you and se


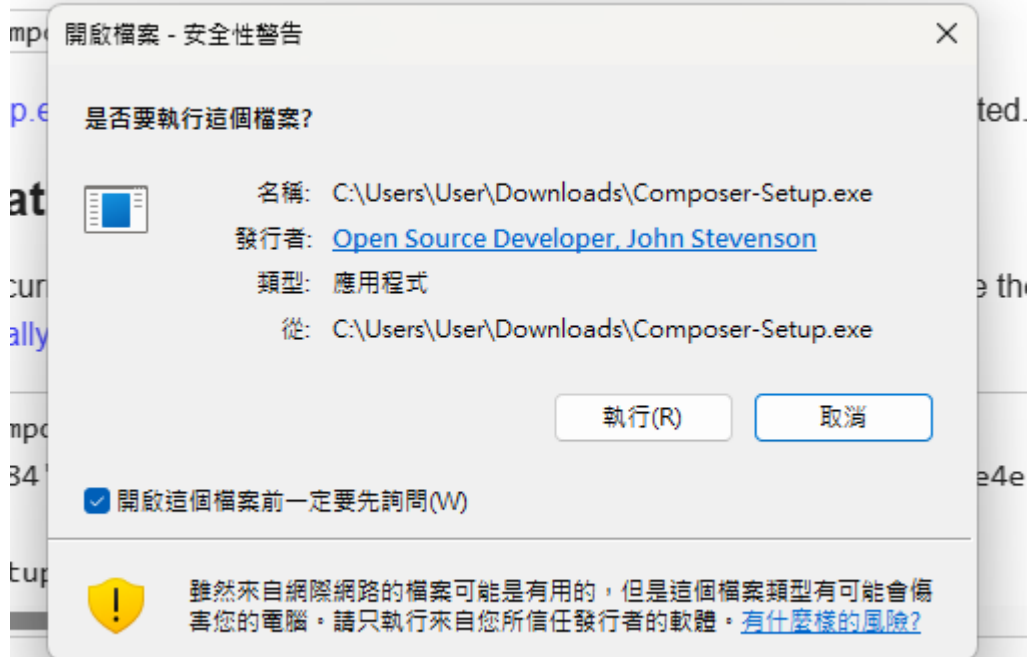


k some php.ini settings warn you if they are set incorrectly. and then
e PHP already installed - will download Composer for y

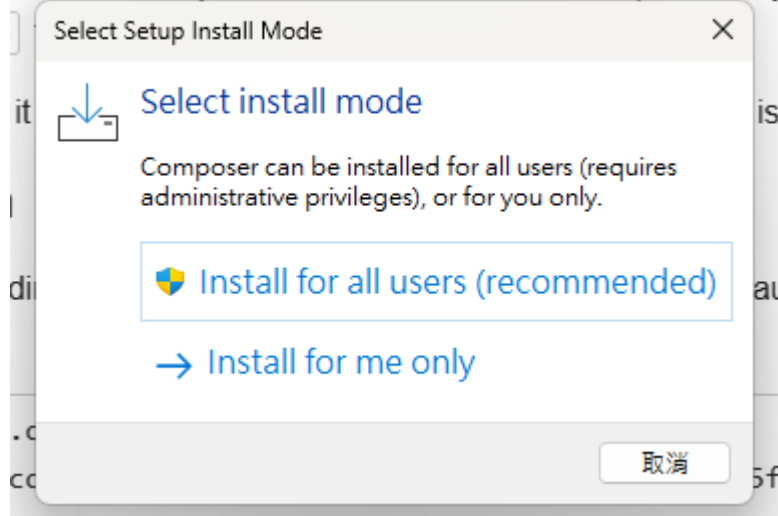

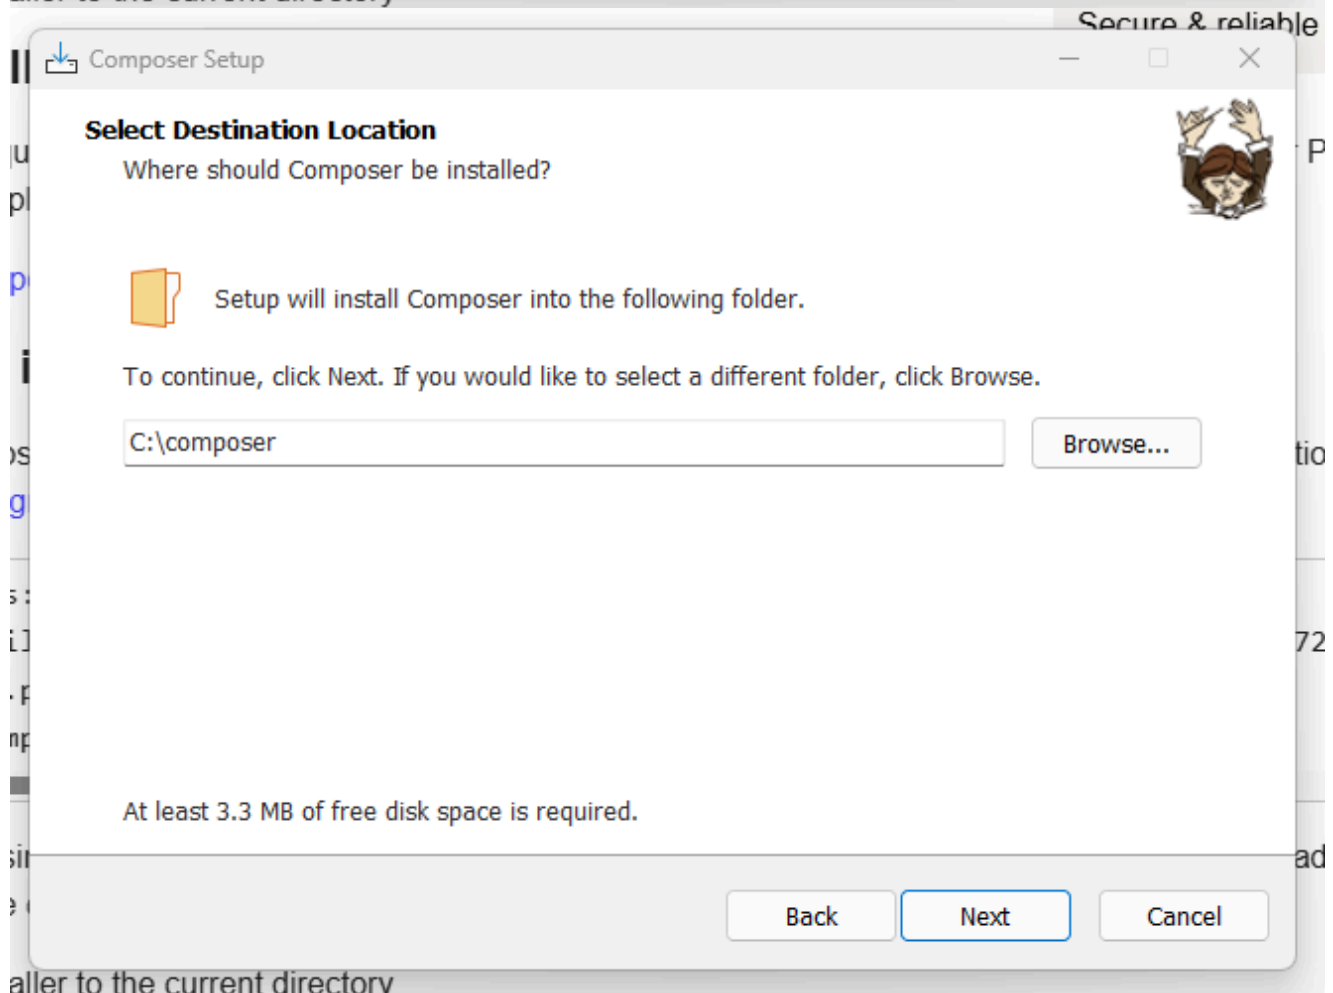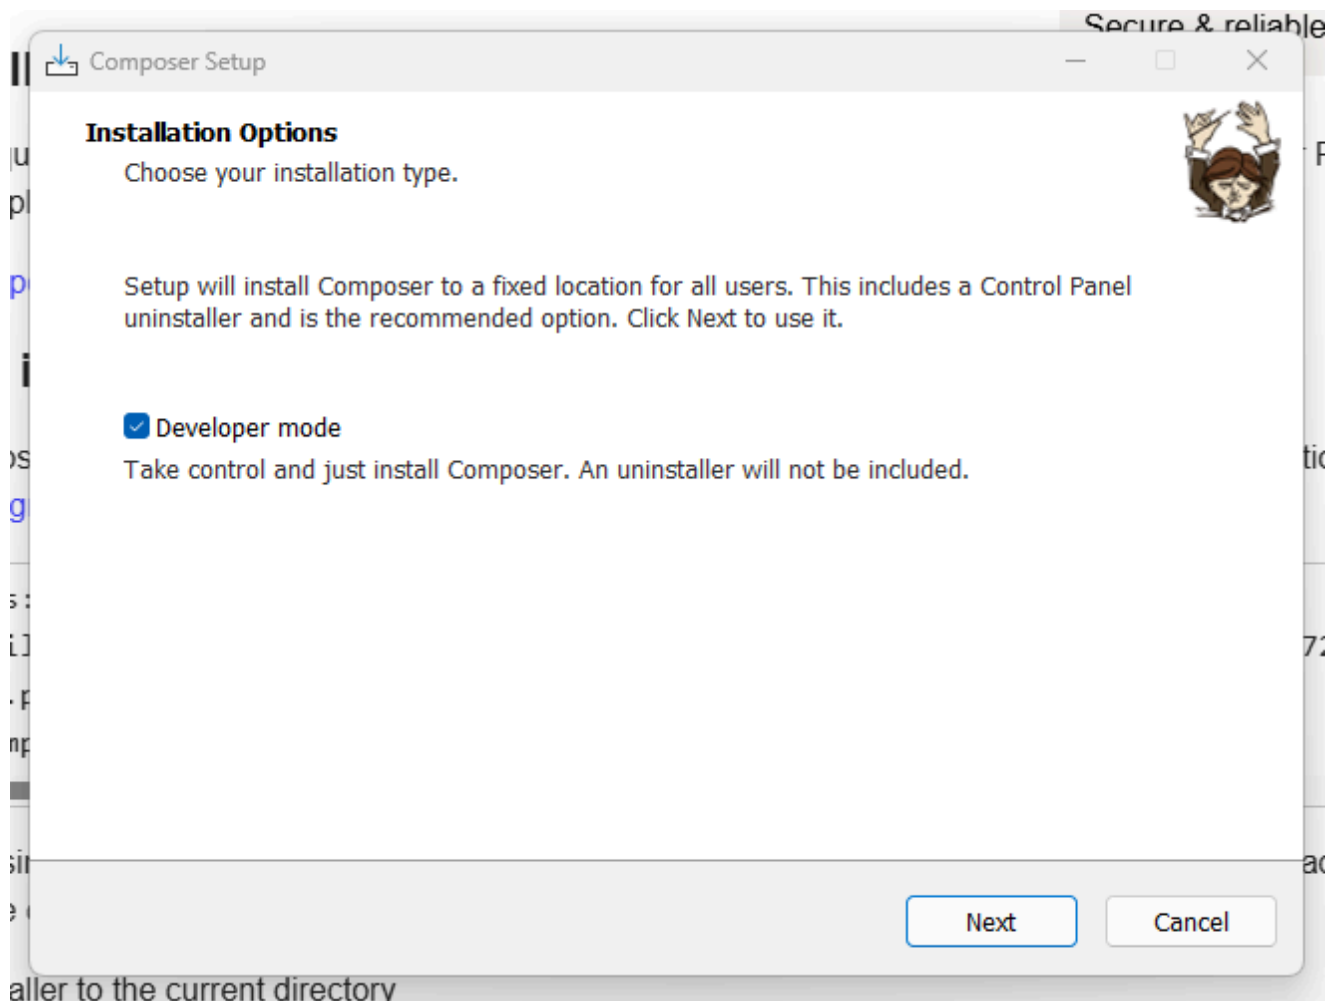

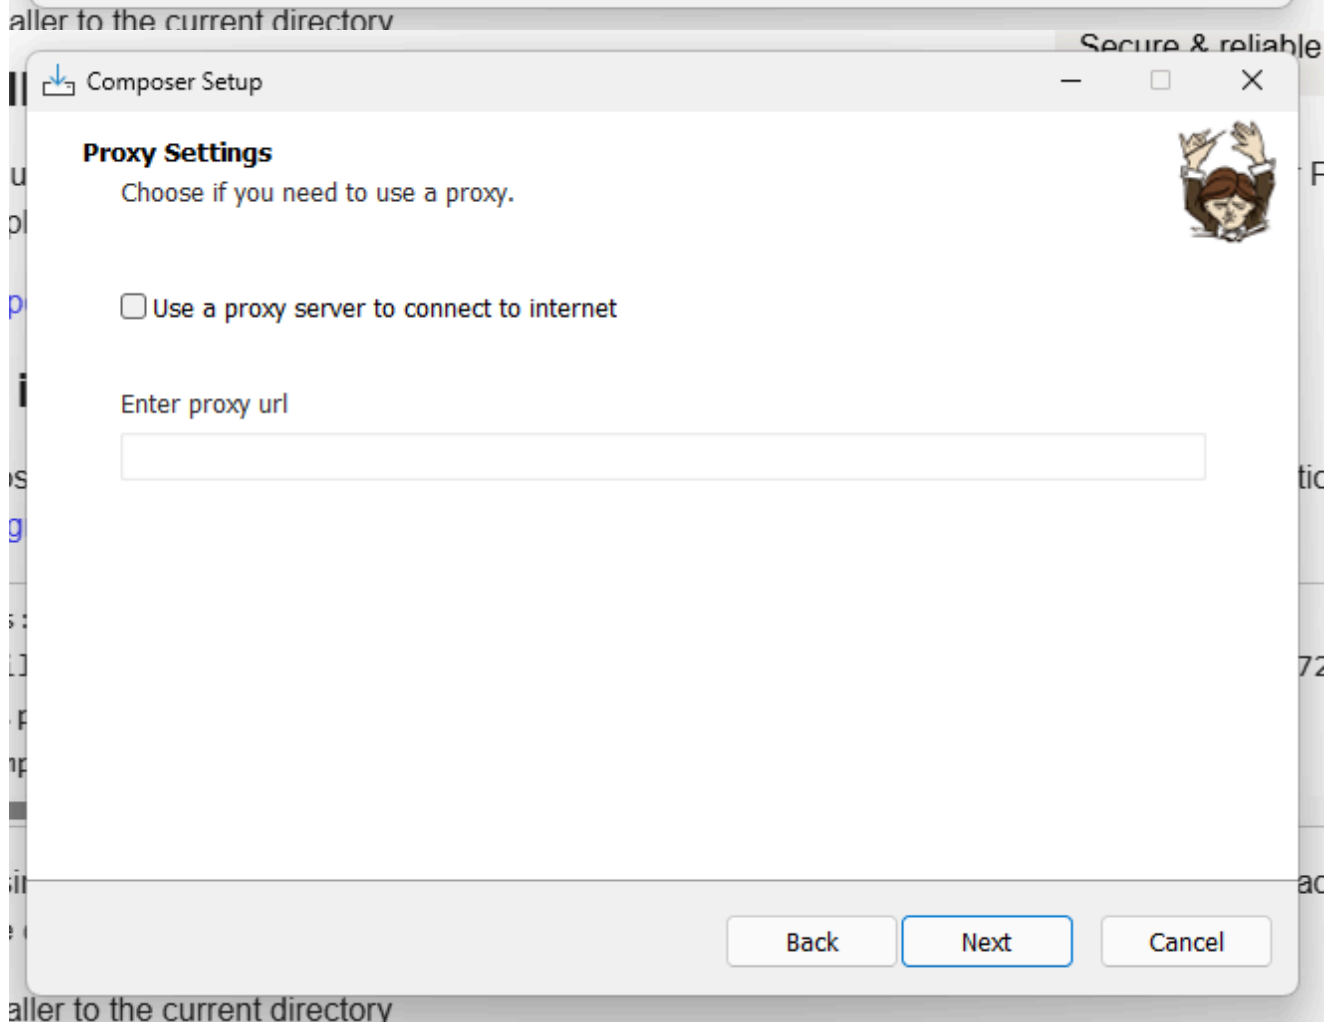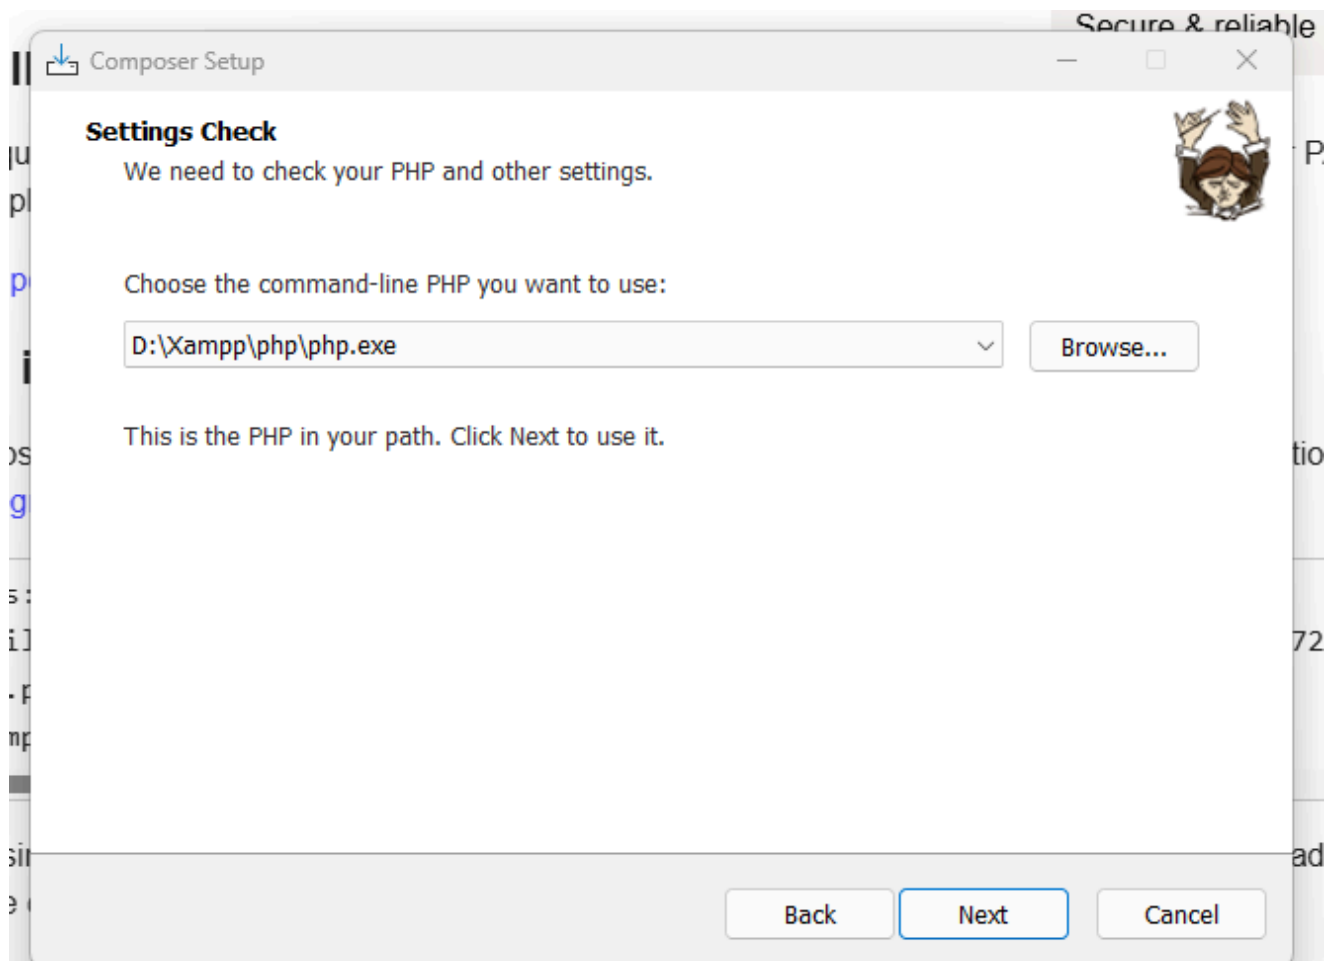

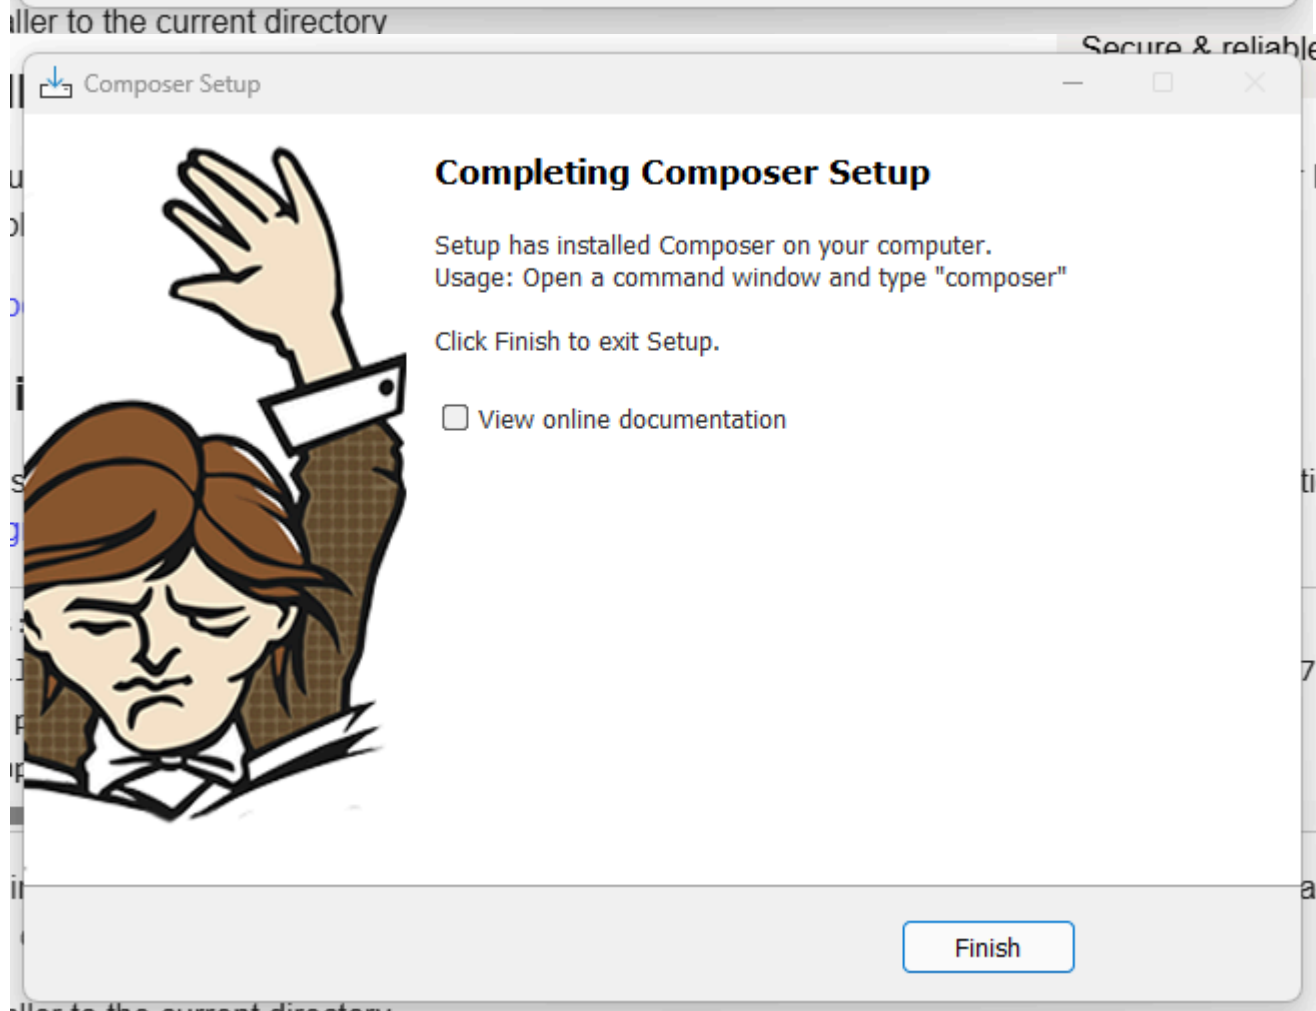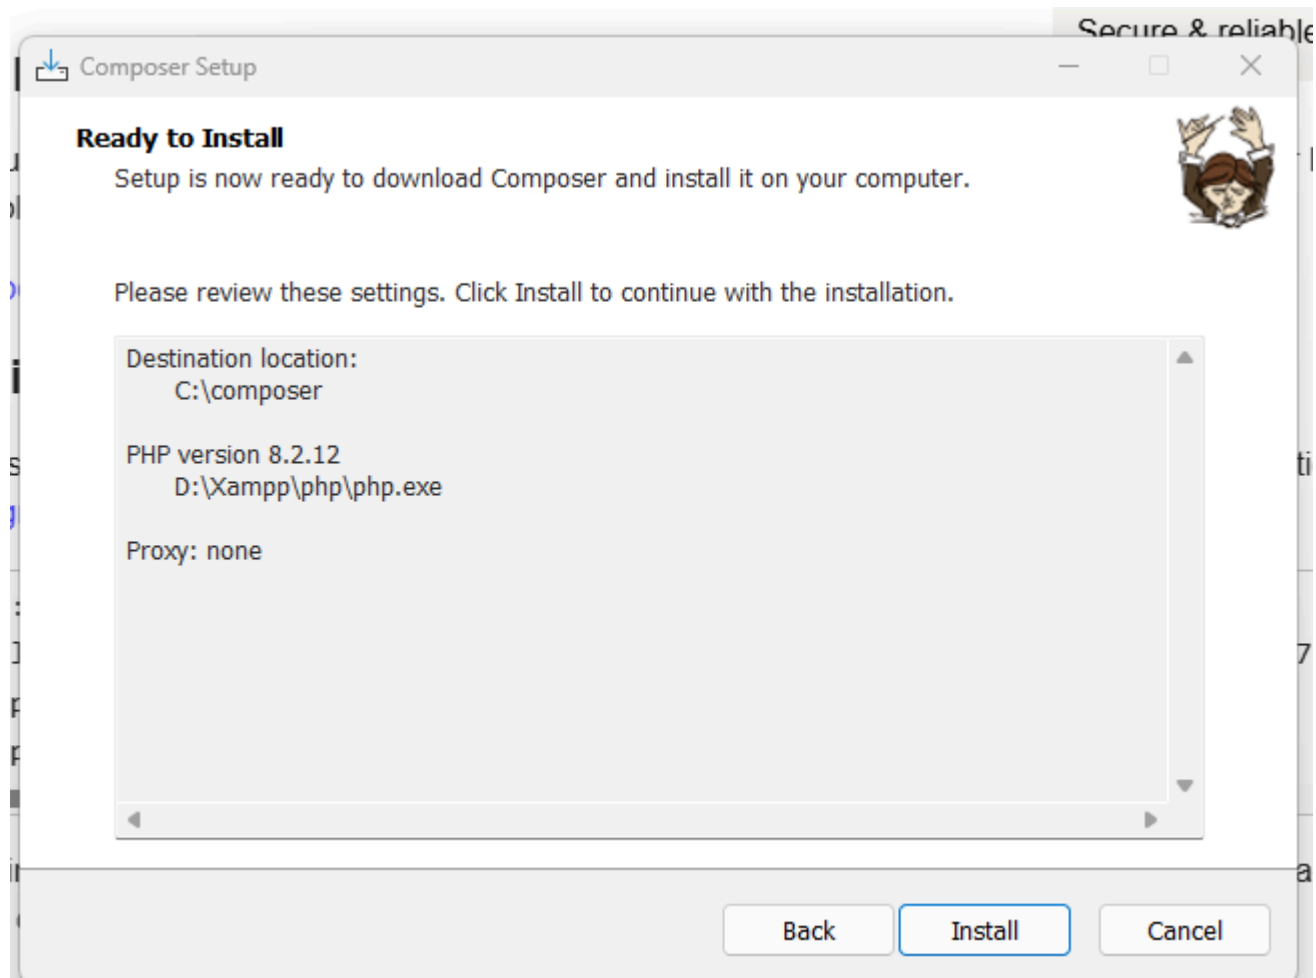

5.下載完成 確認是否安裝完成之畫面



```
MINGW64/c/Users/User
User@1113-01 MINGW64 ~
$ composer

Composer version 2.10.2 2026-07-01 11:24:45

Usage:
  command [options] [arguments]

Options:
  -h, --help                Display help for the given command. When no com
mand is given display help for the list command
  -q, --quiet                Do not output any message
  -V, --version              Display this application version
  --ansi|--no-ansi           Force (or disable --no-ansi) ANSI output
  -n, --no-interaction       Do not ask any interactive question
  --profile                  Display timing and memory usage information
  --no-plugins               Whether to disable plugins.
  --no-scripts               Skips the execution of all scripts defined in c
```

6.建立一個要使用的檔案(專案) > 右鍵Open Git Bash here

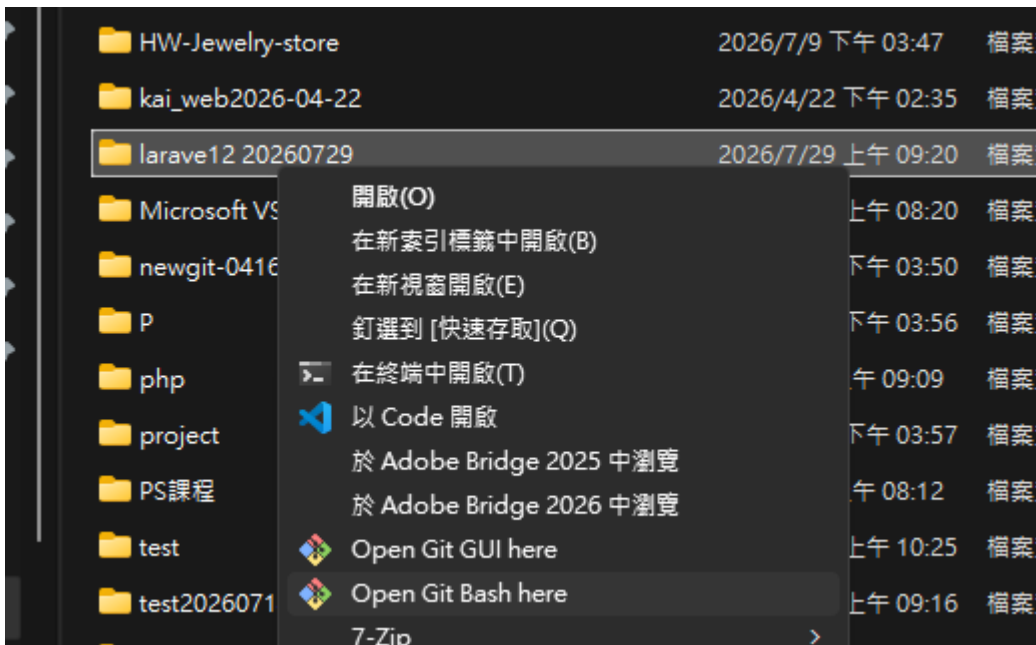

7.找到 Laravel10版本指令改成12的 > 輸入進Git Bash安裝

```
1 composer create-project "laravel/laravel:^10.0" example-app
```

原生(10版本)

```
composer create-project "laravel/laravel:^10.0" example-app
```

(12版本)

```
composer create-project "laravel/laravel:^12.0" example-app
```

```
composer create-project "laravel/laravel:^12.0" s2026072901-init
```

```
MINGW64/d/larave12 20260729
User@1113-01 MINGW64 /d/larave12 20260729
$ composer create-project "laravel/laravel:^12.0" example-app
Creating a "laravel/laravel:^12.0" project at "./example-app"
Installing laravel/laravel (v12.12.2)
- Downloading laravel/laravel (v12.12.2)
- Installing laravel/laravel (v12.12.2): Extracting archive
Created project in D:\larave12 20260729\example-app
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
Updating dependencies
Lock file operations: 111 installs, 0 updates, 0 removals
- Locking brick/math (0.14.8)
- Locking carbonphp/carbon-doctrine-types (3.2.0)
- Locking dflydev/dot-access-data (v3.0.3)
- Locking doctrine/inflector (2.1.0)
- Locking doctrine/lexer (3.0.1)
- Locking dragonmantank/cron-expression (v3.6.0)
- Locking egulias/email-validator (4.0.4)
- Locking fakerphp/faker (v1.24.1)
- Locking filp/whoops (2.18.4)
- Locking fruitcake/php-cors (v1.4.0)
- Locking graham-campbell/result-type (v1.1.4)
- Locking guzzlehttp/guzzle (7.15.2)

INFO No publishable resources for tag [laravel-assets].
No security vulnerability advisories found.
> @php artisan key:generate --ansi
INFO Application key set successfully.
> @php -r "file_exists('database/database.sqlite') || touch('database/database.sqlite');"
> @php artisan migrate --graceful --ansi
INFO Preparing database.
Creating migration table ..... 3.56ms DONE
INFO Running migrations.
0001_01_01_000000_create_users_table ..... 6.95ms DONE
0001_01_01_000001_create_cache_table ..... 4.26ms DONE
0001_01_01_000002_create_jobs_table ..... 5.48ms DONE
User@1113-01 MINGW64 /d/larave12 20260729
$
```

composer create-project "laravel/laravel:^12.0" test0729 (額外建新專案)

```
MINGW64/d/larave12 20260729/test0729
User@1113-01 MINGW64 /d/larave12 20260729
$ composer create-project "laravel/laravel:^12.0" test0729
Creating a "laravel/laravel:^12.0" project at "./test0729"
Installing laravel/laravel (v12.12.2)
- Installing laravel/laravel (v12.12.2): Extracting archive
Created project in D:\larave12 20260729\test0729
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
Updating dependencies
Lock file operations: 111 installs, 0 updates, 0 removals
- Locking brick/math (0.14.8)
- Locking carbonphp/carbon-doctrine-types (3.2.0)
- Locking dflydev/dot-access-data (v3.0.3)
- Locking doctrine/inflector (2.1.0)
- Locking doctrine/lexer (3.0.1)
- Locking dragonmantank/cron-expression (v3.6.0)
- Locking egulias/email-validator (4.0.4)
- Locking fakerphp/faker (v1.24.1)
- Locking filp/whoops (2.18.4)
- Locking fruitcake/php-cors (v1.4.0)
- Locking graham-campbell/result-type (v1.1.4)
- Locking guzzlehttp/guzzle (7.15.2)
```

```
MINGW64/d/larave12 20260729/test0729
Creating migration table .....

INFO Running migrations.

0001_01_01_000000_create_users_table .....
0001_01_01_000001_create_cache_table .....
0001_01_01_000002_create_jobs_table .....

User@1113-01 MINGW64 /d/larave12 20260729
$ ls
example-app/  test0729/

User@1113-01 MINGW64 /d/larave12 20260729
$ cd test0729/

User@1113-01 MINGW64 /d/larave12 20260729/test0729
$ php artisan serve

INFO Server running on [http://127.0.0.1:8000].

Press Ctrl+C to stop the server
```

composer global require laravel/installer test072902 【無法安裝~xampp不符合版本~當期版本最新13(8.3)】

```
MINGW64/d/larave12 20260729
User@1113-01 MINGW64 /d/larave12 20260729
$ composer global require laravel/installer test072902
Changed current directory to C:/Users/User/AppData/Roaming/Composer

In VersionParser.php line 526:

could not parse version constraint test072902: Invalid version string "test
072902"

require [--dev] [--dry-run] [--prefer-source] [--prefer-dist] [--prefer-install]
PREFER-INSTALL] [--fixed] [--no-suggest] [--no-progress] [--no-update] [--no-ins
tall] [--no-audit] [--audit-format AUDIT-FORMAT] [--no-security-blocking] [--no-
blocking] [--update-no-dev] [-w|--update-with-dependencies] [-W|--update-with-al
l-dependencies] [--with-dependencies] [--with-all-dependencies] [--ignore-platfo
rm-req IGNORE-PLATFORM-REQ] [--ignore-platform-reqs] [--prefer-stable] [--prefer
-lowest] [-m|--minimal-changes] [--sort-packages] [-o|--optimize-autoloader] [-a
|--classmap-authoritative] [--apcu-autoloader] [--apcu-autoloader-prefix APCU-AU
TOLOADER-PREFIX] [--] [<packages>...]

User@1113-01 MINGW64 /d/larave12 20260729
$
```

8.

cd example-app > 「進入專案目錄」

php artisan serve > 「啟動本機測試伺服器」

```
User@1113-01 MINGW64 /d/larave12 20260729
$ cd example-app

User@1113-01 MINGW64 /d/larave12 20260729/example-app
$ php artisan serve

INFO Server running on [http://127.0.0.1:8000].

Press Ctrl+C to stop the server

2026-07-29 09:28:23 / ..... ~ 0.26ms
2026-07-29 09:28:23 /favicon.ico ..... ~ 514.89ms
```

Laravel

- 序幕
- 入門
- 安裝
- 配置
- 目錄結構
- 前端
- 入門套件
- 部署
- 建築概念
- 基礎知識
- 深入挖掘
- 安全
- 資料庫
- 雄辯的 ORM
- 測試
- 包裹
- API 文件
- 更新日誌

Q 搜尋

安裝完 PHP 和 Composer 後，您可以透過 Composer `create-project` 指令建立一個新的 Laravel 專案：

```
1 composer create-project "laravel/laravel:*10.0" example-app
```

或者，您也可以透過 Composer 全域安裝 [Laravel 安裝程式](#) 來建立新的 [Laravel 專案](#)：

```
1 composer global require laravel/installer
2
3 laravel new example-app
```

專案建立完成後，使用 `Laravel Artisan serve` 指令啟動 Laravel 的本機開發伺服器：

```
1 cd example-app
2
3 php artisan serve
```

啟動 Artisan 開發伺服器後，您就可以在瀏覽器中透過 <http://localhost:8000> 存取您的應用程式了。接下來，您就可以 [開始探索 Laravel 生態系統的下一步了](#)。當然，您可能還需要 [配置資料庫](#)。

💡

如果您想在開發 Laravel 應用時快速入門，不妨考慮使用我們的 [入門套件](#)。
Laravel 入門套件為您的新 Laravel 應用程式提供後端和前端驗證框架。

版本 10.x

🔊

三 本頁

認識 Laravel

為什麼選擇 Laravel ?

創建 Laravel 項目

初始配置

基於環境的配置

資料庫和遷移

目錄配置

使用 Sail 安裝 Docker

在 macOS 上航行

在 Windows 上航行

在 Linux 上航行

選擇您的帆船服務

IDE 支援


Laravel 和人工智慧

安裝 Laravel Boost


後續步驟

Laravel 全端框架

Laravel API 後端


LaravelBoost


9.網址處 > Ctrl+左鍵 > 跳轉到以下網頁即成功

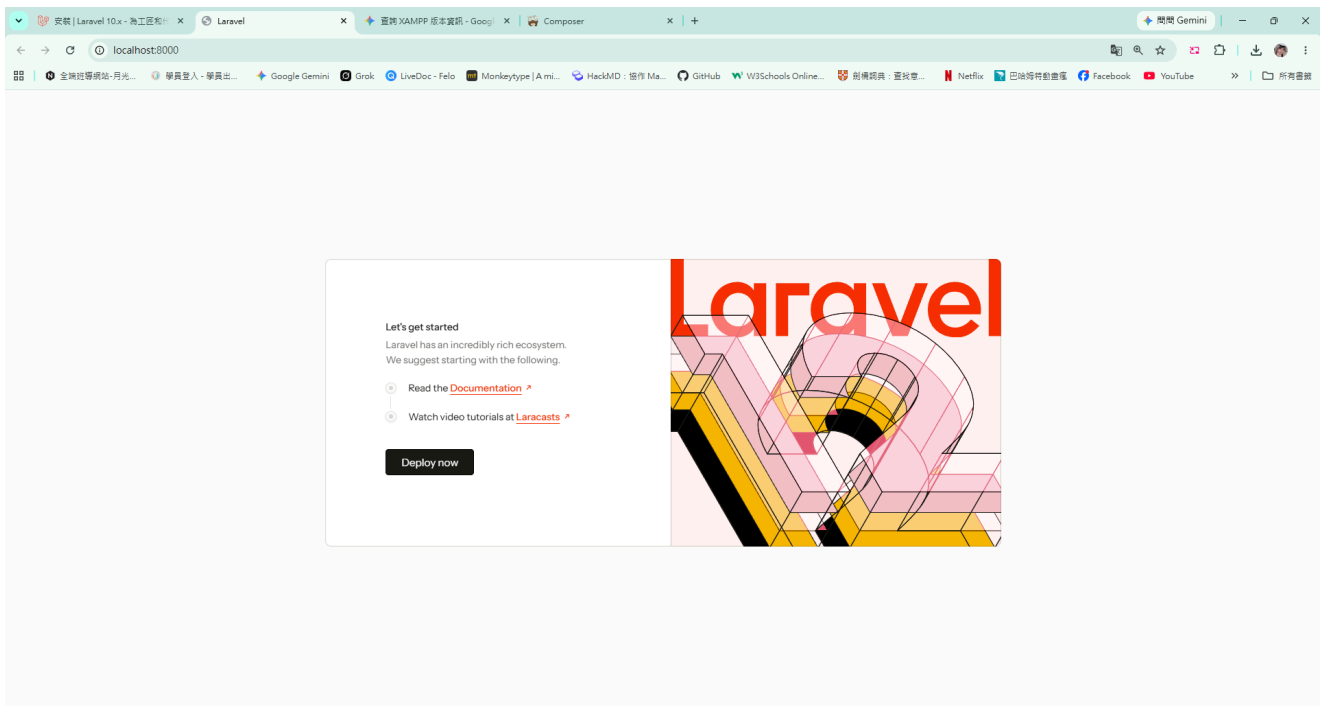

10.設定xampp的根目錄時~進資料夾中 > public資料夾中 > 複製路徑貼進更改 (\ 要改為 /)

```
03 DocumentRoot "D:\Xampp\htdocs\laravel12\s2026072901-init/public"  
04 <Directory "D:\Xampp\htdocs\laravel12\s2026072901-init/public">
```

完成後xampp重置就能打開畫面

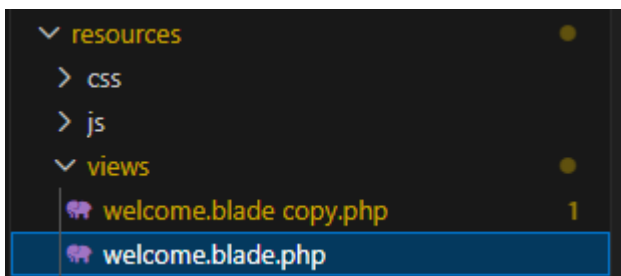

welcome.blade.php 是他的主畫面顯示區

ctrl + c 中斷 停止

ctrl + l 清除畫面

cd .. 回到上一層

cd 目錄 進入下一層目錄

history 歷史的指令

ls 當層目錄列表

設計原理

1. Convention over Configuration 慣例優於設定
2. Don't Repeat Yourself 不要重複造輪子

等候帶位 routes

web (web.php) 帶位的人


views 指向位置 > 新增對應的檔案名稱的檔案

get('/網址','執行動作function') 這個字串 網址 localhost/hello222

view("") 頁面

```
routes > web.php > ...  
1 <?php  
2  
3 use Illuminate\Support\Facades\Route;  
4  
5 Route::get('/', function () {  
6     return view('welcome');  
7 });  
8  
9  
10 Route::get('/hello222', function () {  
11     return view('table222');  
12 });  
13
```

未成功導向，會顯示錯誤訊息

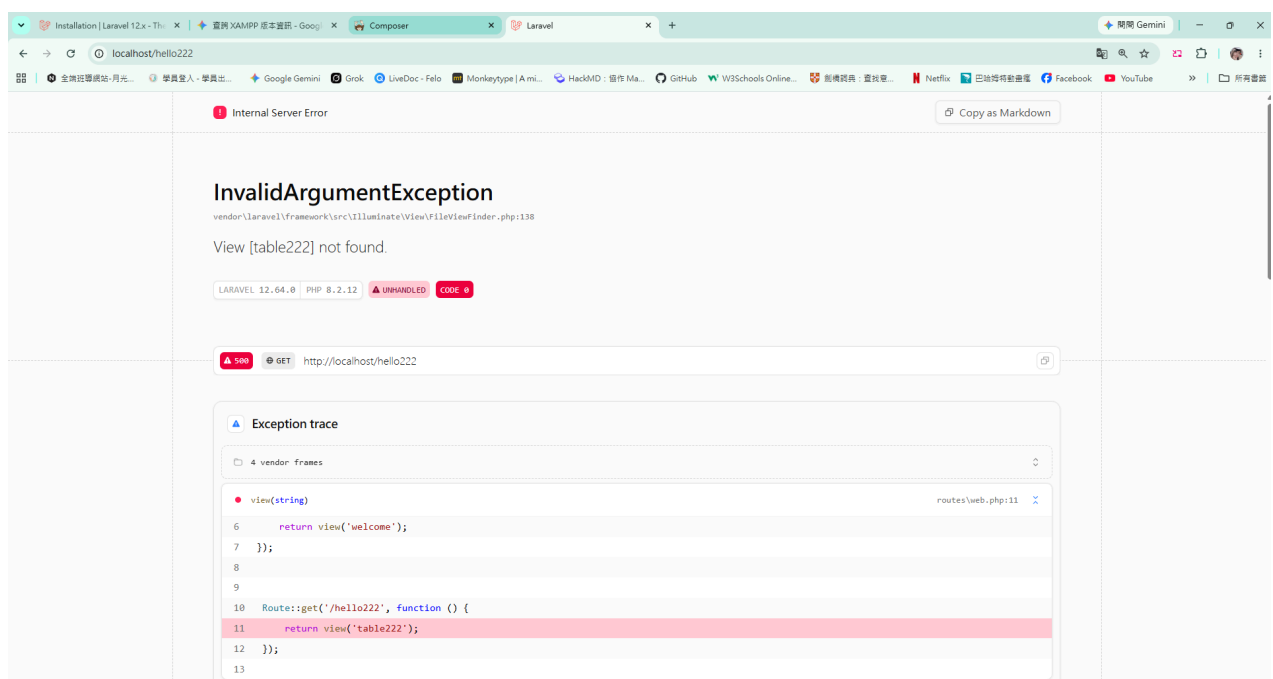

```
resources > views > table222.blade.php > html
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-sca
6     <title>Document</title>
7 </head>
8 <body>
9     <table>hello222</table>
10 </body>
11 </html>
```

Installation | Laravel 12.x - The x | 查詢 XAMPP 版本資訊 - Goog | Composer x Document x +

localhost/hello222

全端班導師網站-月光... 學員登入 - 學員出... Google Gemini Grok LiveDoc - Felo Monkeytype | A mi... HackMD : 協作 Ma... GitHub W3Schools Online...

hello222

//也可以直接寫入顯示

```
Route::get('/calculator', function () {
    //echo "hihi calculator";
    $data = [1,2,3];
    dd($data);
    //return 'Hello World';
});
```

```
array:3 [▼ // routes\web.php:23
  0 => 1
  1 => 2
  2 => 3
]
```

laravel helper

AI 模式 全部 購物 圖片 影片 新聞 短片 更多 ▾ 工具 ▾

 **Laravel**
https://laravel.com › docs › helpers · 翻譯這個網頁

Helpers | Laravel 13.x - The clean stack for Artisans and ...

Laravel includes a variety of global "helper" PHP functions. Many of these functions are used by the framework itself; however, you are free to use them in your ...

Available Methods Other Utilities Deferred Functions Lottery

顯示全部的路由

php artisan route:list


php artisan make:controller UserController

新增新的Controller（控制器）就是負責處理網站邏輯

php artisan make:controller HotelController


```
User@1113-01 MINGW64 /d/xampp/htdocs/laravel12/s2026073001
$ php artisan make:controller HotelController
```


```
INFO Controller [D:\xampp\htdocs\laravel12\s2026073001\app\Http\Controllers\HotelController.php] created successfully.
```

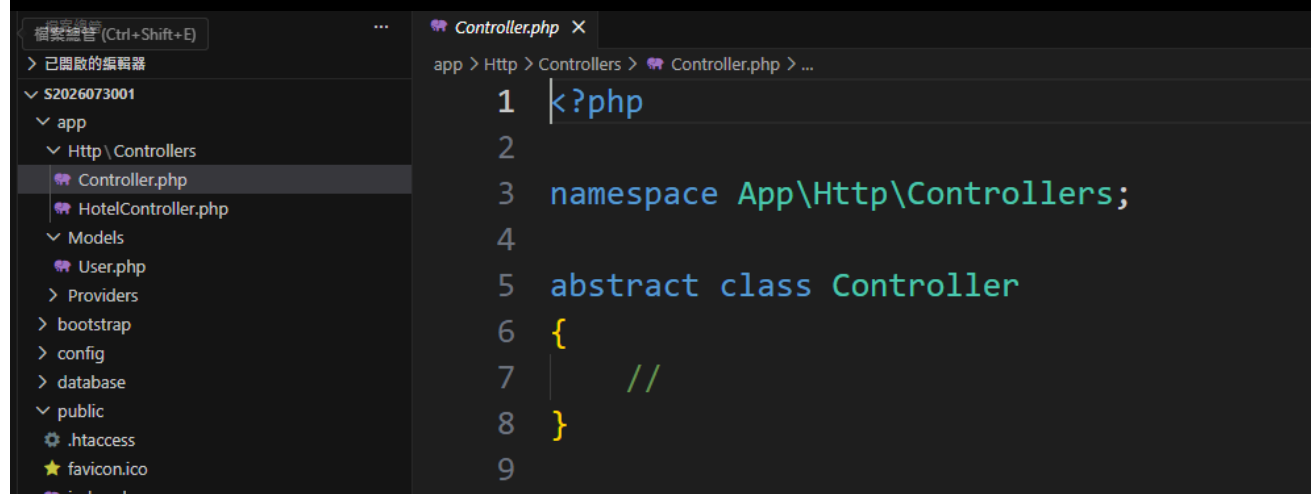

The screenshot shows an IDE interface. On the left is a file explorer with a tree view of the project structure. The project is named 'S2026073001'. Inside it is a folder 'app', which contains a subfolder 'Http'. The 'Http' folder contains 'Controllers', which in turn contains 'Controller.php' and 'HotelController.php'. Other folders visible include 'Models', 'Providers', 'bootstrap', 'config', 'database', and 'public'. The 'public' folder contains '.htaccess', 'favicon.ico', and 'index.php'. On the right is the editor window for 'Controller.php'. The code in the editor is as follows:

```
1 |?php
2
3 namespace App\Http\Controllers;
4
5 abstract class Controller
6 {
7     //
8 }
9
```

HotelController.php

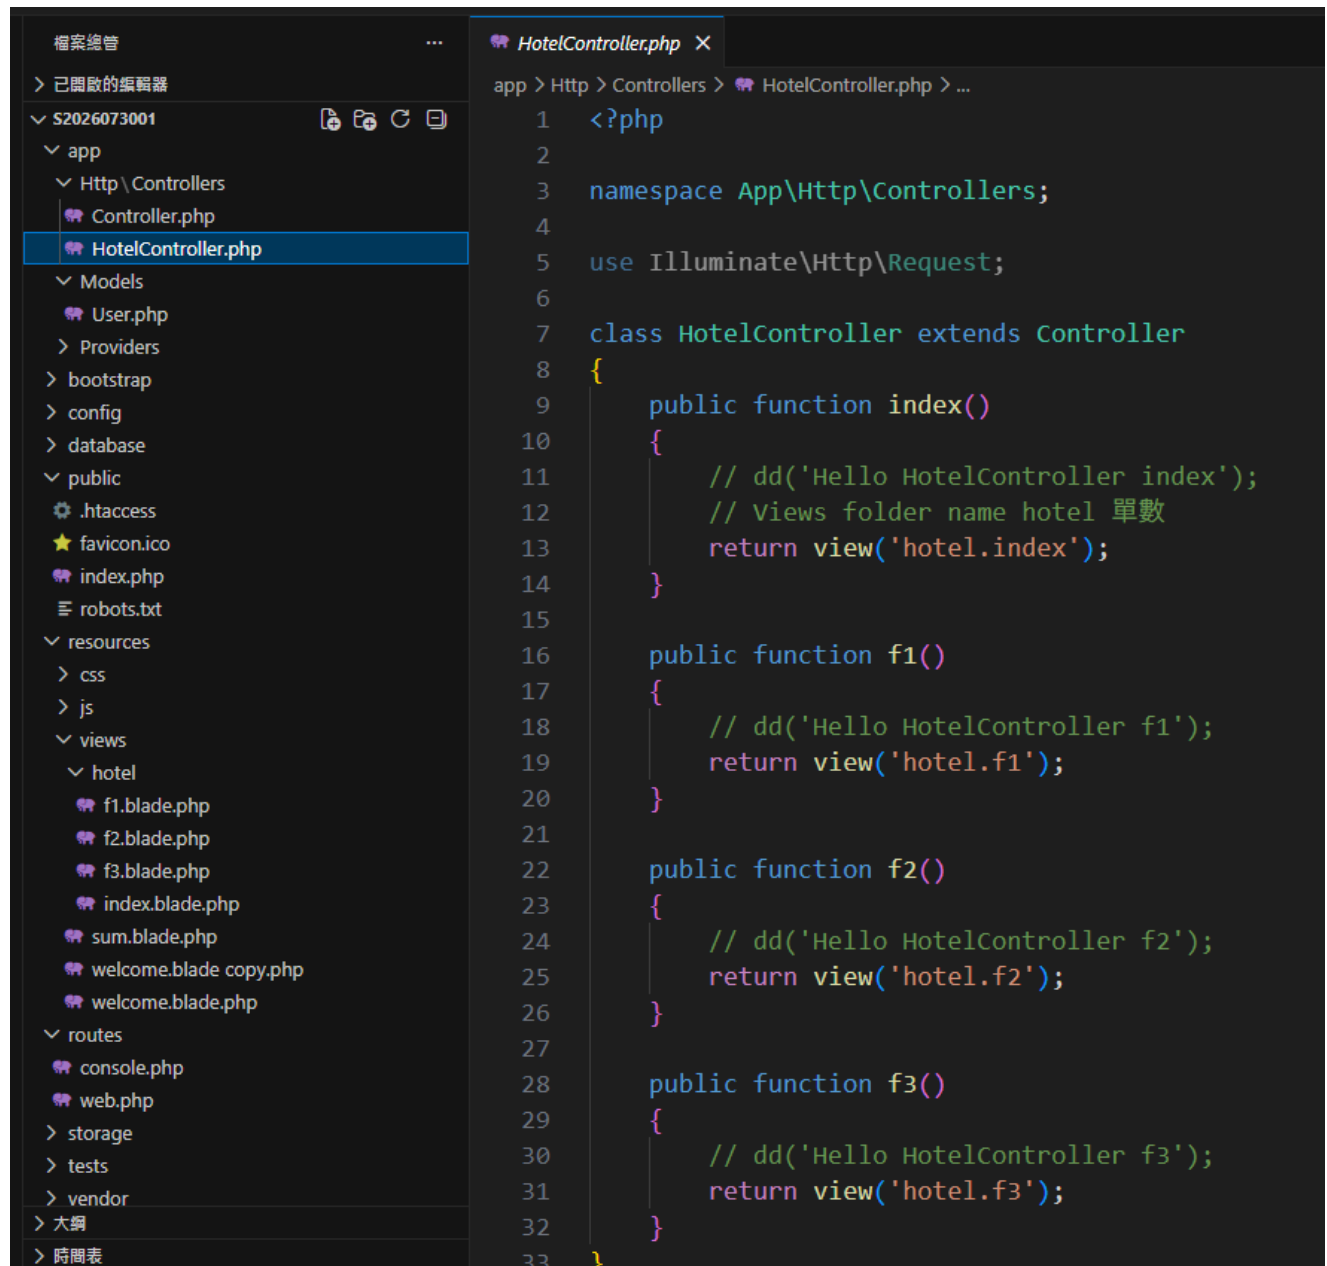

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class HotelController extends Controller
8 {
9     public function index()
10     {
11         // dd('Hello HotelController index');
12         // Views folder name hotel 單數
13         return view('hotel.index');
14     }
15
16     public function f1()
17     {
18         // dd('Hello HotelController f1');
19         return view('hotel.f1');
20     }
21
22     public function f2()
23     {
24         // dd('Hello HotelController f2');
25         return view('hotel.f2');
26     }
27
28     public function f3()
29     {
30         // dd('Hello HotelController f3');
31         return view('hotel.f3');
32     }
33 }
```