


修改虛擬目錄需要修改幾個地方，第一個修改vhosts

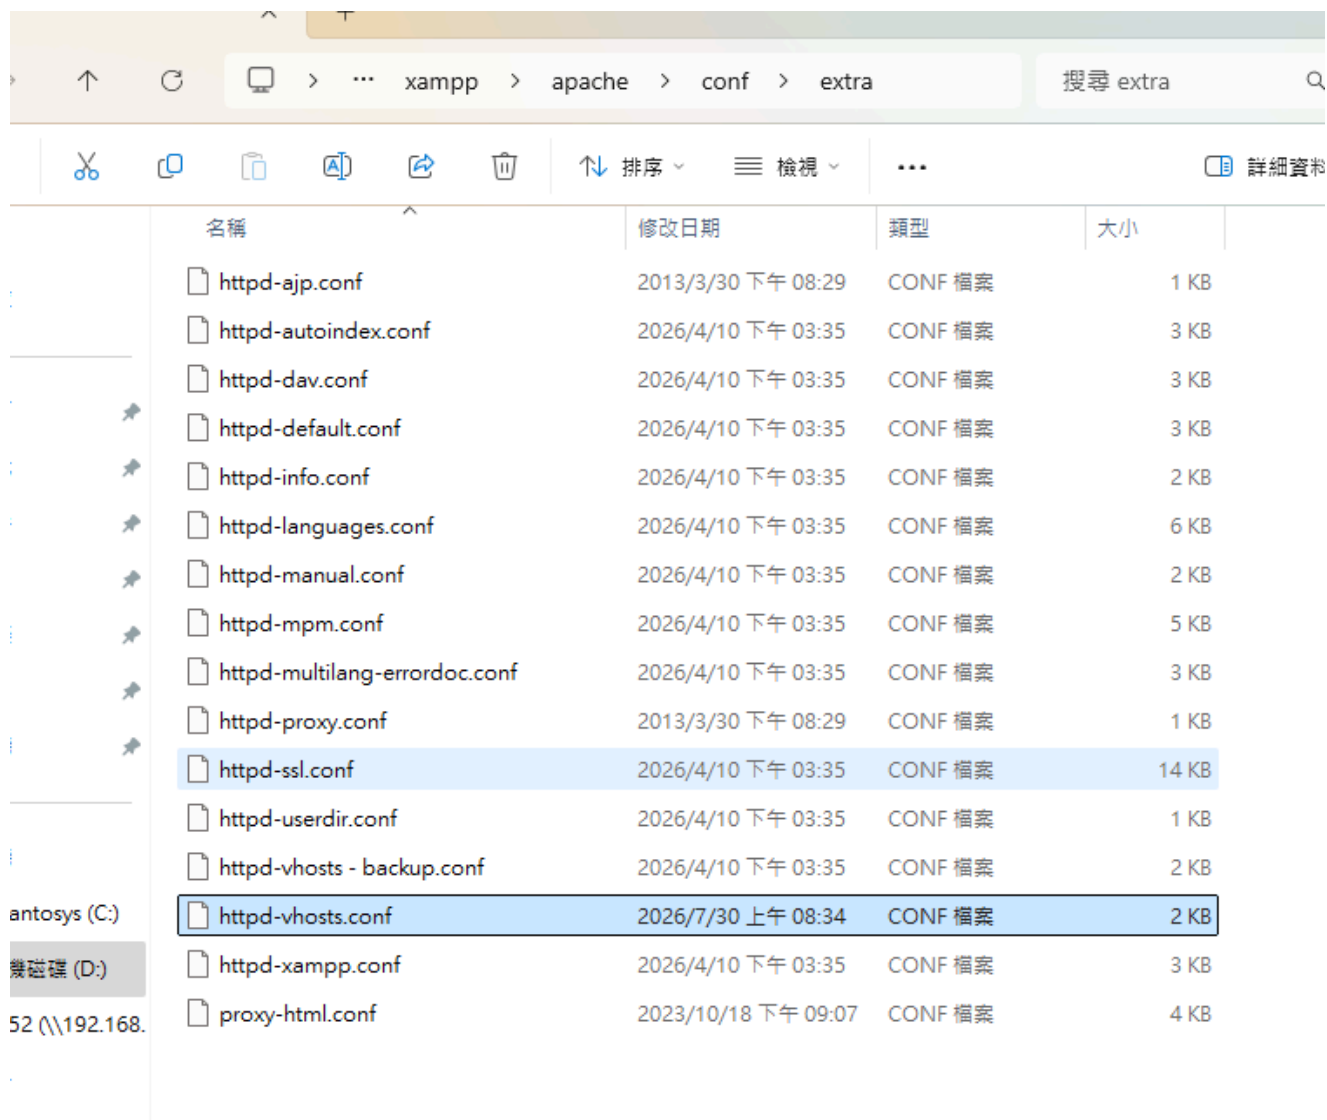

The screenshot shows a file explorer window with the address bar displaying the path: `xampp > apache > conf > extra`. The search bar contains the text "搜尋 extra". The file list is as follows:

名稱	修改日期	類型	大小
<code>httpd-ajp.conf</code>	2013/3/30 下午 08:29	CONF 檔案	1 KB
<code>httpd-autoindex.conf</code>	2026/4/10 下午 03:35	CONF 檔案	3 KB
<code>httpd-dav.conf</code>	2026/4/10 下午 03:35	CONF 檔案	3 KB
<code>httpd-default.conf</code>	2026/4/10 下午 03:35	CONF 檔案	3 KB
<code>httpd-info.conf</code>	2026/4/10 下午 03:35	CONF 檔案	2 KB
<code>httpd-languages.conf</code>	2026/4/10 下午 03:35	CONF 檔案	6 KB
<code>httpd-manual.conf</code>	2026/4/10 下午 03:35	CONF 檔案	2 KB
<code>httpd-mpm.conf</code>	2026/4/10 下午 03:35	CONF 檔案	5 KB
<code>httpd-multilang-errordoc.conf</code>	2026/4/10 下午 03:35	CONF 檔案	3 KB
<code>httpd-proxy.conf</code>	2013/3/30 下午 08:29	CONF 檔案	1 KB
<code>httpd-ssl.conf</code>	2026/4/10 下午 03:35	CONF 檔案	14 KB
<code>httpd-userdir.conf</code>	2026/4/10 下午 03:35	CONF 檔案	1 KB
<code>httpd-vhosts - backup.conf</code>	2026/4/10 下午 03:35	CONF 檔案	2 KB
<code>httpd-vhosts.conf</code>	2026/7/30 上午 08:34	CONF 檔案	2 KB
<code>httpd-xampp.conf</code>	2026/4/10 下午 03:35	CONF 檔案	3 KB
<code>proxy-html.conf</code>	2023/10/18 下午 09:07	CONF 檔案	4 KB

修改對應的資料夾


```
<VirtualHost *:80>
    ##ServerAdmin webmaster@dummy-host2.example.com
    DocumentRoot "D:/xampp/htdocs/laravel/text-0730/public"
    ServerName laravel
    ##ErrorLog "logs/dummy-host2.example.com-error.log"
    ##CustomLog "logs/dummy-host2.example.com-access.log" common

    <Directory "D:/xampp/htdocs/laravel/text-0730/public">

        AllowOverride All
        Require all granted
    </Directory>

</VirtualHost>
```

第二步修改httpd.conf

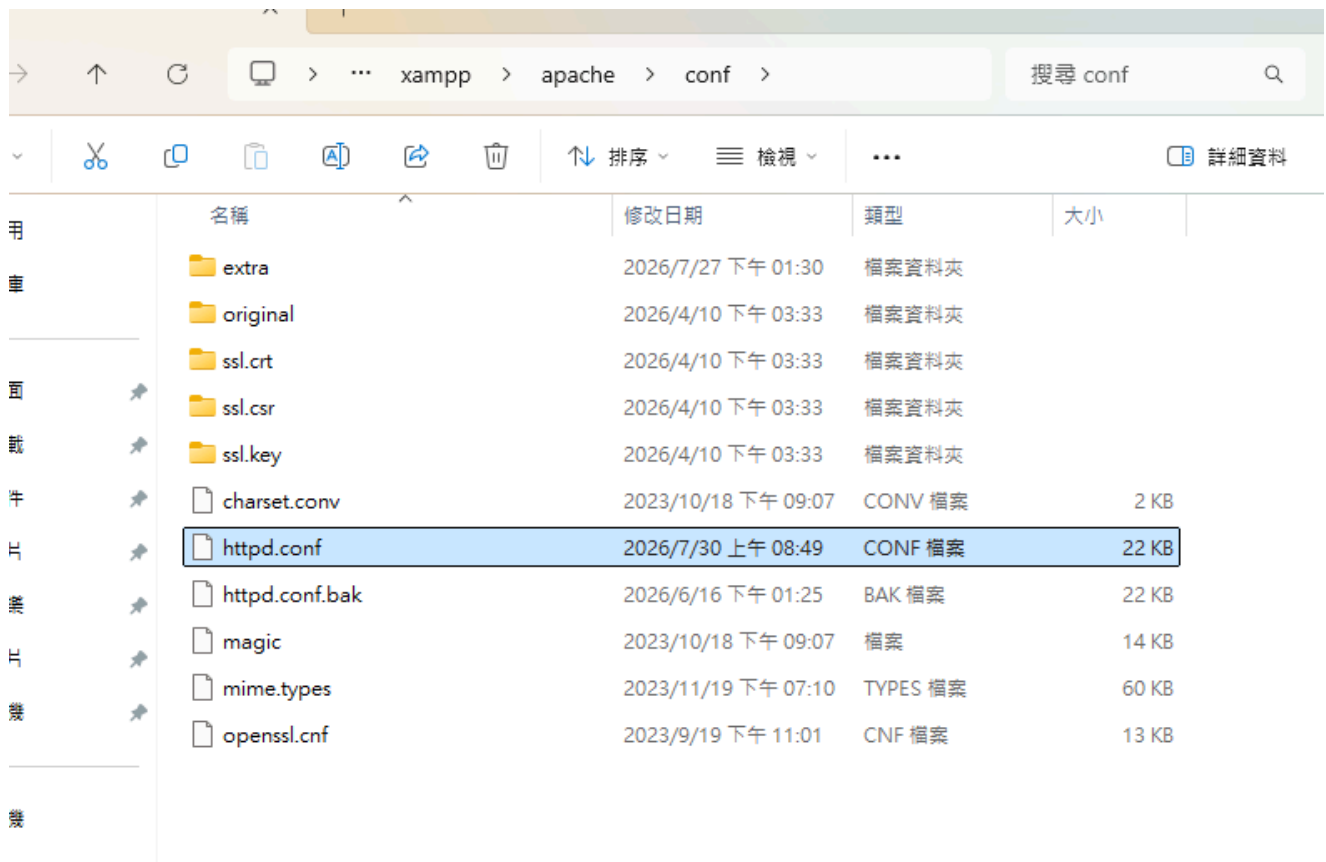

修改對應的資料夾

```
250 #
251 #DocumentRoot "D:/system/etf_tracker"
252 #<Directory "D:/system/etf_tracker">
253 #DocumentRoot "D:/test/"
254 #<Directory "D:/test/">
255 DocumentRoot "D:/xampp/htdocs/laravel"
256 <Directory "D:/xampp/htdocs/laravel">
257 #DocumentRoot "D:/職訓課程/每日課程/鄭光凱/0624"
258 #<Directory "D:/職訓課程/每日課程/鄭光凱/0624">
259 #
260 # Possible values for the Options directive are "Non
261 # or any combination of:
262 #   Indexes Includes FollowSymLinks SymLinksifOwnerM
263 #
```

laravel安裝

先確認自己的xampp版本是什麼

```
Windows PowerShell
著作權 (C) Microsoft Corporation。保留擁有權利。

安裝最新的 PowerShell 以取得新功能和改進功能！https://aka.ms/PSWindows

PS D:\xampp> php -v
PHP 8.2.12 (cli) (built: Oct 24 2023 21:15:15) (ZTS Visual C++ 2019 x64)
Copyright (c) The PHP Group
Zend Engine v4.2.12, Copyright (c) Zend Technologies
PS D:\xampp> |
```

再用命令提示字元查詢自己有沒有安裝過composer，如果有安裝過會顯示這個畫面，畫面中是使用Git bash開啟查詢

Git bash的常用指令

ctrl+L 清空畫面

cd.. 回到上一層目錄

cd+目錄 進入指定的目錄

history 顯示曾經使用過的指令

ls 目前這層的目錄列表

```
MINGW64/c/Users/User
User@1113-13 MINGW64 ~
$ composer

Composer

Composer version 2.9.7 2026-04-14 13:31:52

Usage:
  command [options] [arguments]

Options:
  -h, --help                Display help for the given command. When no command is g
  -q, --quiet                Do not output any message
  -V, --version              Display this application version
  --ansi|--no-ansi           Force (or disable --no-ansi) ANSI output
  -n, --no-interaction       Do not ask any interactive question
  --profile                  Display timing and memory usage information
  --no-plugins               Whether to disable plugins.
  --no-scripts               Skips the execution of all scripts defined in composer.j
  -d, --working-dir=WORKING-DIR If specified, use the given directory as working directo
  --no-cache                 Prevent use of the cache
  -v|vv|vvv, --verbose      Increase the verbosity of messages: 1 for normal output,
```

如果沒有安裝過就先到composer的官網下載並安裝

Composer

A Dependency Manager for PHP

Latest: 2.10.2 ([changelog](#))

[Getting Started](#) [Download](#)

[Documentation](#) [Browse Packages](#)

[Issues](#) [GitHub](#)

Authors: [Nils Adermann](#), [Jordi Boggiano](#) and many [community contributions](#)

Commercial support & consulting available through:

 **PRIVATE PACKAGIST**

[Sponsor Composer & Packagist.org](#)

Logo by: [Max Grigorian](#)


Composer and all content on this site are released under the [MIT license](#).

laravel的官網選擇Docs連結


Laravel Framework Products Resources Events Docs

84K Sign in Search docs


The clean stack for Artisans and agents.



選擇Installation並配合第一步確認的xampp版本，選擇對應的laravel版本(這邊是安裝第12版)

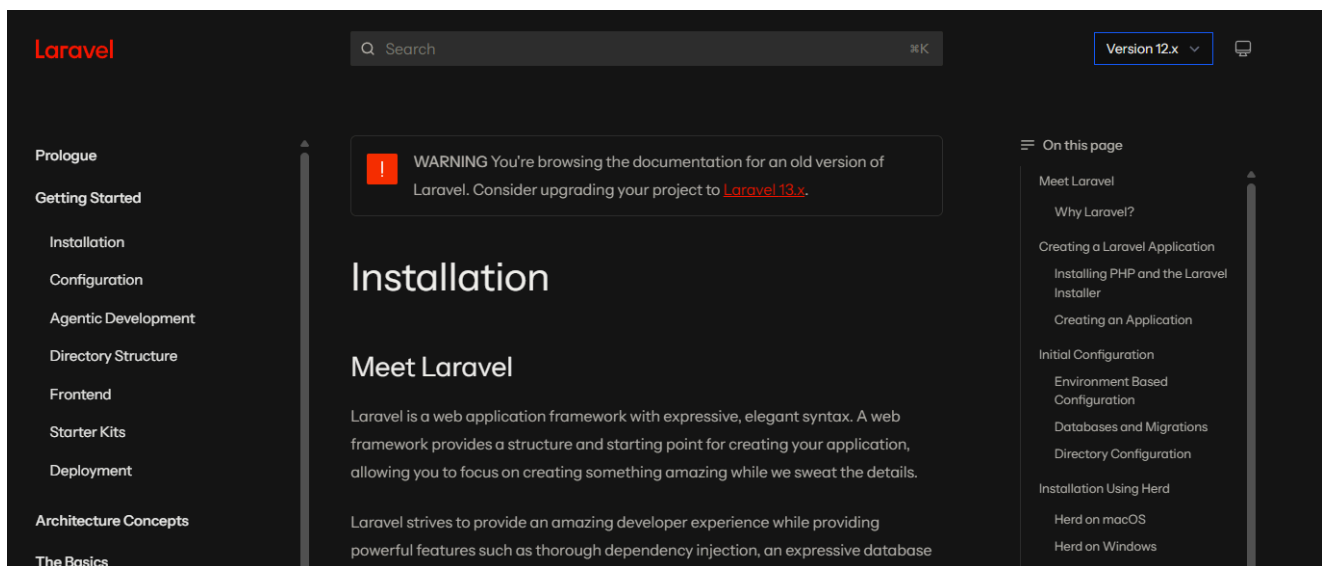


往下會找到composer的安裝指令，第12版的指令只有"composer global require laravel/installer"

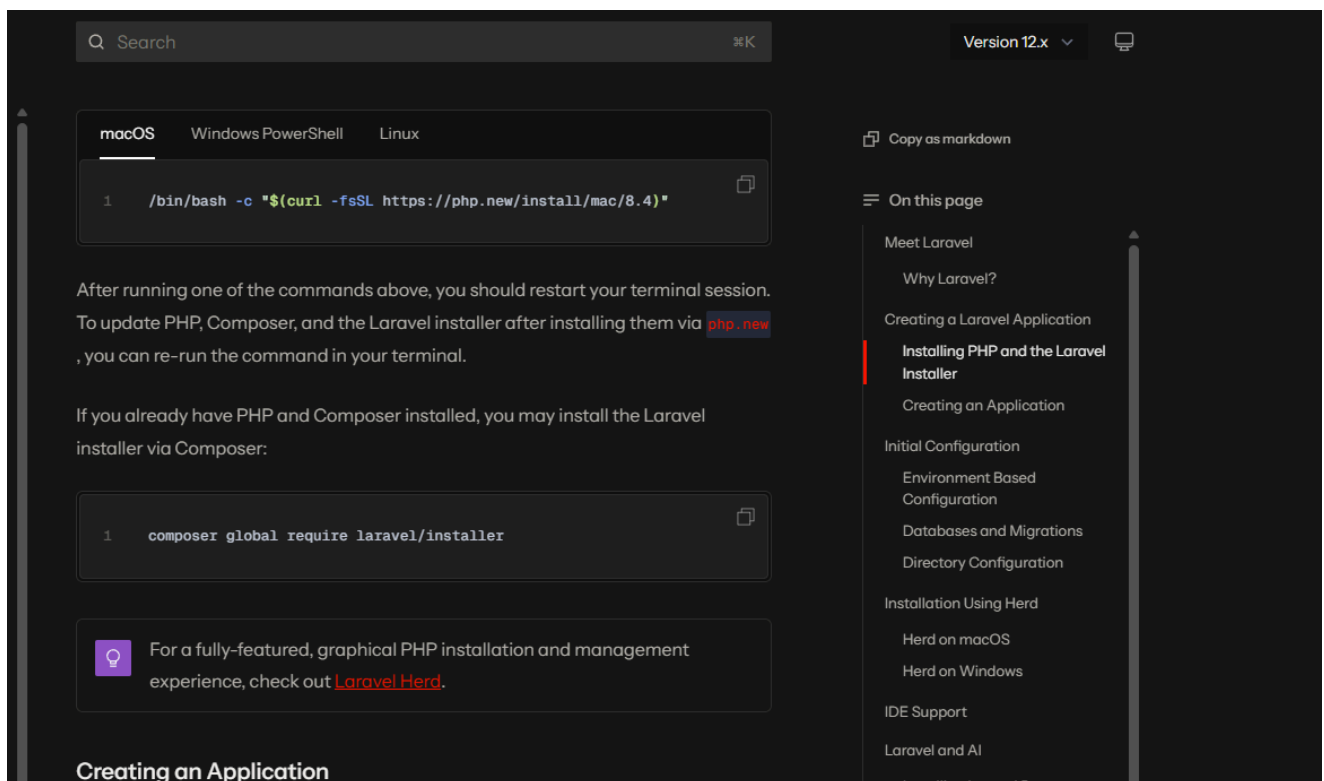

直接先改去第10版查詢第10版的安裝指令"composer create-project "laravel/laravel:^10.0" example-app" 來複製修改成第12版的指令"composer create-project

"laravel/laravel:^12.0" example-app"

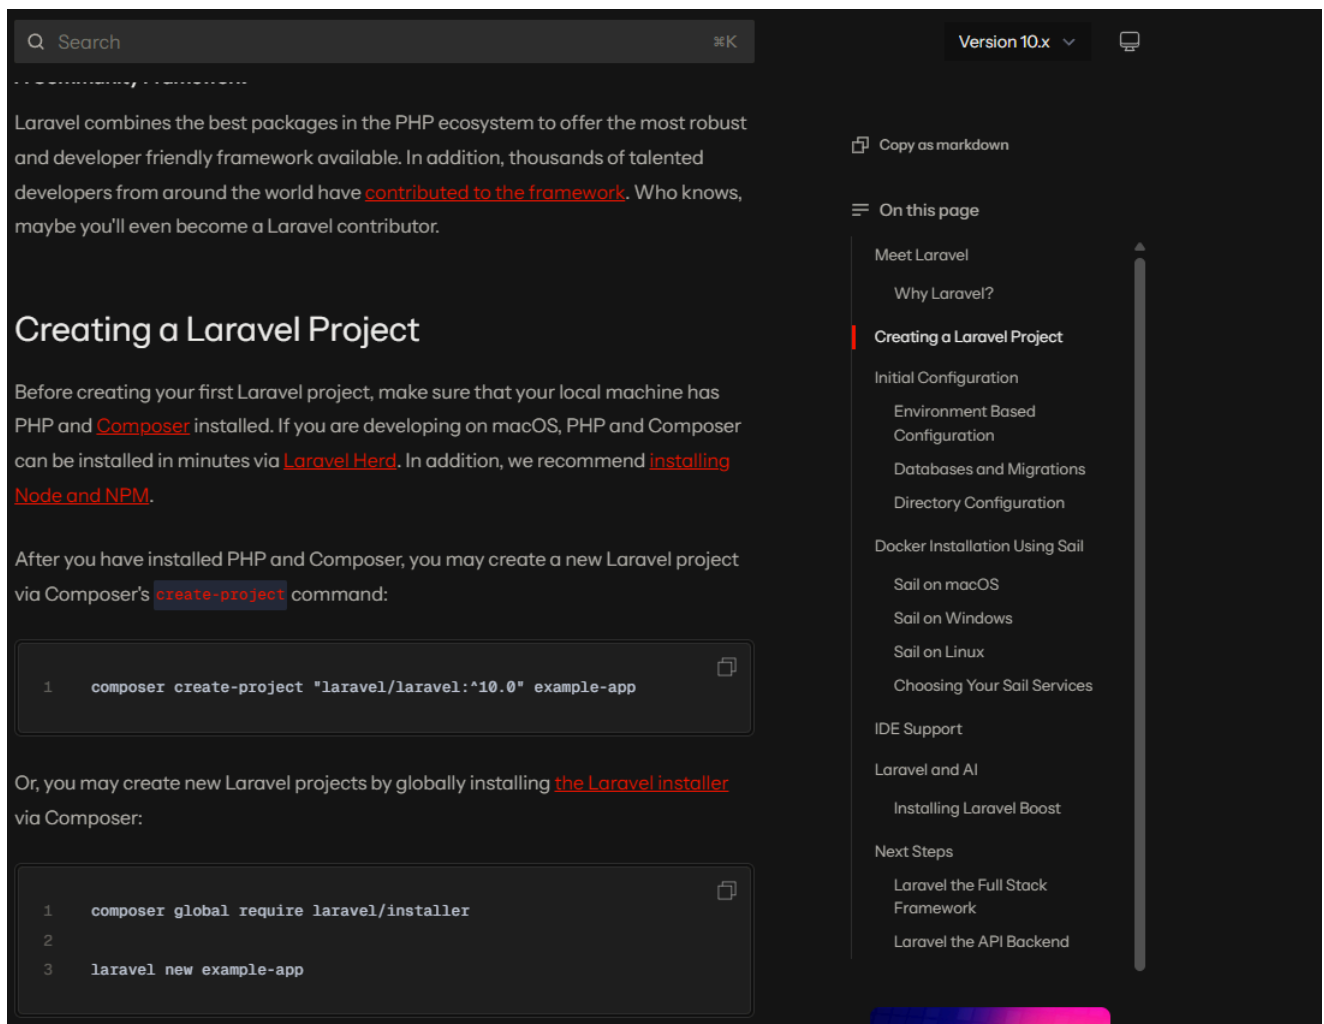

The screenshot shows the Laravel documentation page for creating a new project. The page has a dark theme. At the top, there is a search bar and a version selector set to "Version 10.x". The main content area starts with an introduction to Laravel, followed by a section titled "Creating a Laravel Project". This section explains that before creating a project, one must ensure PHP and Composer are installed. It then provides two methods for creating a new project: using the `composer create-project` command or globally installing the Laravel installer via Composer. Two code blocks are provided for these methods. On the right side, there is a sidebar with a table of contents for the "Creating a Laravel Project" section, which includes links to "Meet Laravel", "Why Laravel?", "Creating a Laravel Project" (the current page), "Initial Configuration", "Environment Based Configuration", "Databases and Migrations", "Directory Configuration", "Docker Installation Using Sail", "IDE Support", "Laravel and AI", and "Next Steps".

Laravel combines the best packages in the PHP ecosystem to offer the most robust and developer friendly framework available. In addition, thousands of talented developers from around the world have [contributed to the framework](#). Who knows, maybe you'll even become a Laravel contributor.

Creating a Laravel Project

Before creating your first Laravel project, make sure that your local machine has PHP and [Composer](#) installed. If you are developing on macOS, PHP and Composer can be installed in minutes via [Laravel Herd](#). In addition, we recommend [installing Node and NPM](#).

After you have installed PHP and Composer, you may create a new Laravel project via Composer's [create-project](#) command:

```
1 composer create-project "laravel/laravel:^10.0" example-app
```

Or, you may create new Laravel projects by globally installing [the Laravel installer](#) via Composer:


```
1 composer global require laravel/installer
2
3 laravel new example-app
```

Copy as markdown


On this page

- Meet Laravel
- Why Laravel?
- Creating a Laravel Project**
- Initial Configuration
 - Environment Based Configuration
 - Databases and Migrations
 - Directory Configuration
- Docker Installation Using Sail
 - Sail on macOS
 - Sail on Windows
 - Sail on Linux
 - Choosing Your Sail Services
- IDE Support
- Laravel and AI
 - Installing Laravel Boost
- Next Steps
 - Laravel the Full Stack Framework
 - Laravel the API Backend

xampp->htdocs資料夾內建立laravel資料夾，這邊會統一建議都裝在htdocs資料夾底下，方便後續debug查找路徑

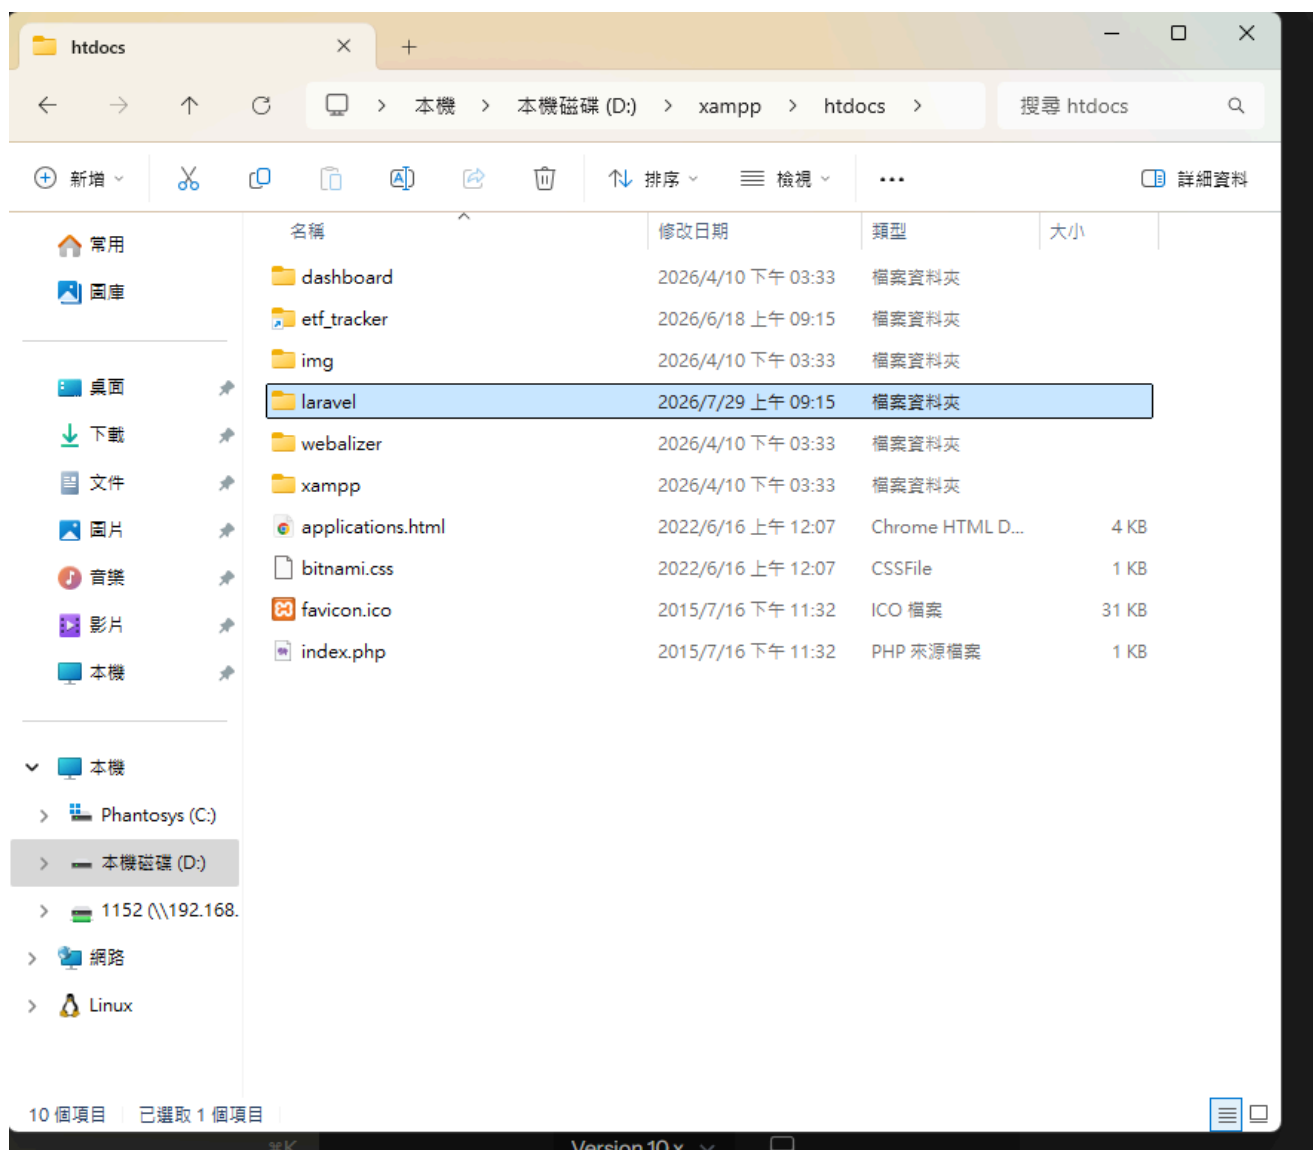

用git bush或命令提示字元開啟(還沒安裝不會有畫面中的資料夾)

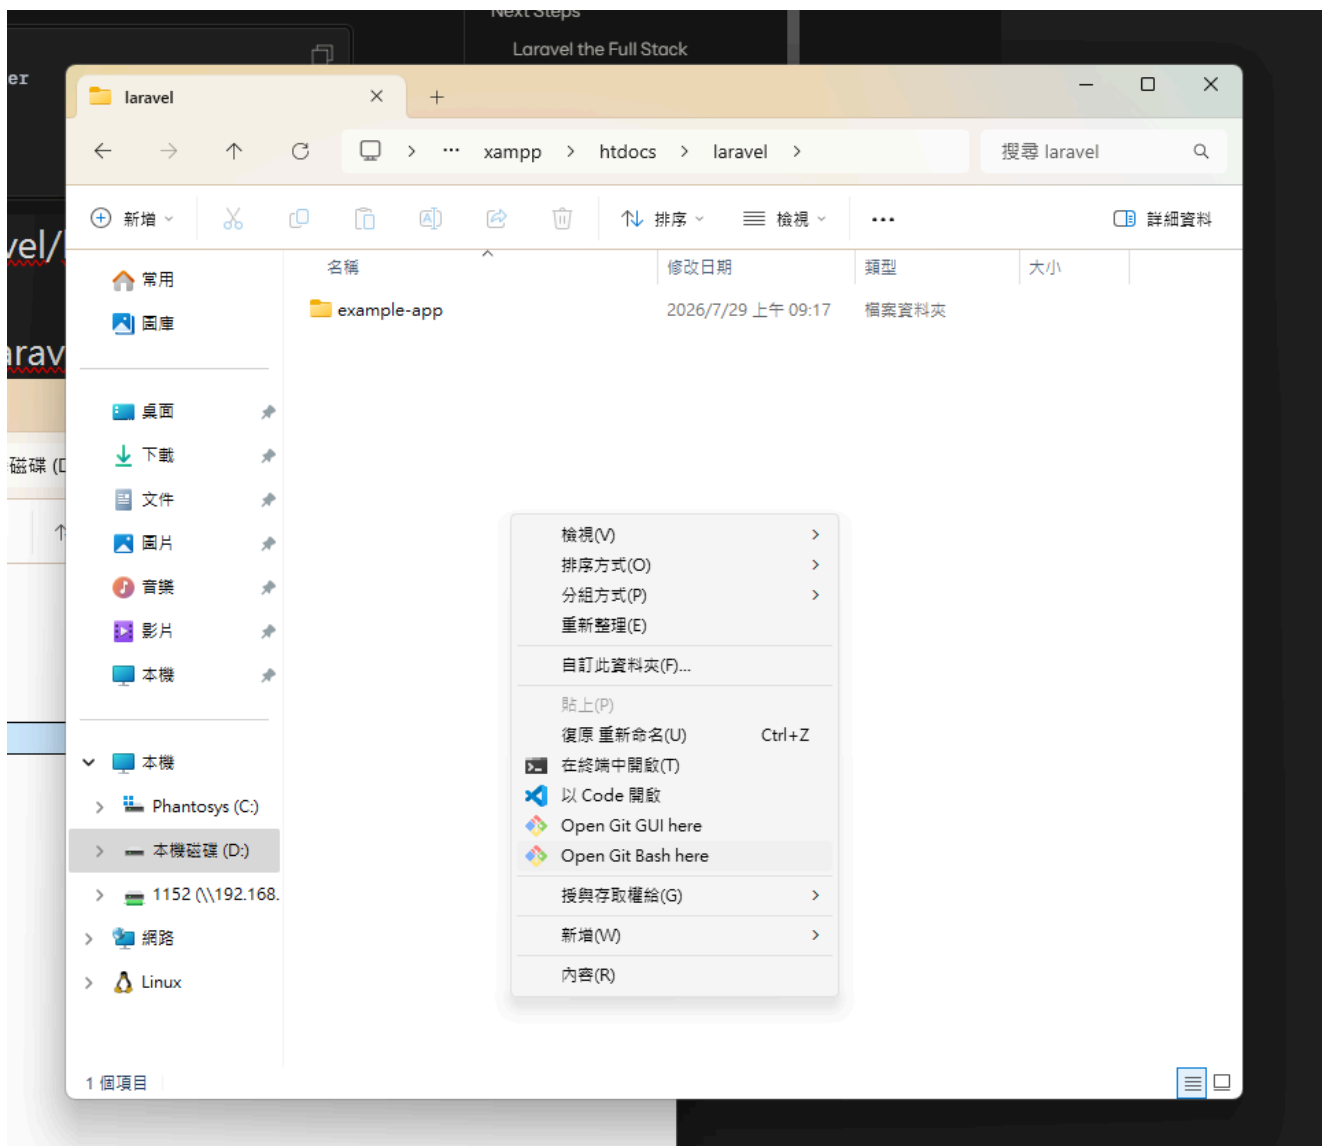


貼上第12版的安裝指令"composer create-project
"laravel/laravel:^12.0" example-app"
最後面的"example-app"是建立的資料夾名稱，可以自己

取名

```
MINGW64/d:/xampp/htdocs/laravel
- Installing sebastian/version (5.0.2): Extracting archive
- Installing sebastian/type (5.1.3): Extracting archive
- Installing sebastian/recursion-context (6.0.3): Extracting archive
- Installing sebastian/object-reflector (4.0.1): Extracting archive
- Installing sebastian/object-enumerator (6.0.1): Extracting archive
- Installing sebastian/global-state (7.0.2): Extracting archive
- Installing sebastian/exporter (6.3.2): Extracting archive
- Installing sebastian/environment (7.2.1): Extracting archive
- Installing sebastian/diff (6.0.2): Extracting archive
- Installing sebastian/comparator (6.3.3): Extracting archive
- Installing sebastian/code-unit (3.0.3): Extracting archive
- Installing sebastian/cli-parser (3.0.2): Extracting archive
- Installing phpunit/php-timer (7.0.1): Extracting archive
- Installing phpunit/php-text-template (4.0.1): Extracting archive
- Installing phpunit/php-invoker (5.0.1): Extracting archive
- Installing phpunit/php-file-iterator (5.1.1): Extracting archive
- Installing theseer/tokenizer (1.3.1): Extracting archive
- Installing sebastian/lines-of-code (3.0.1): Extracting archive
- Installing sebastian/complexity (4.0.1): Extracting archive
- Installing sebastian/code-unit-reverse-lookup (4.0.1): Extracting archive
- Installing phpunit/php-code-coverage (11.0.12): Extracting archive
- Installing phar-io/version (3.2.1): Extracting archive
- Installing phar-io/manifest (2.0.4): Extracting archive
- Installing myclabs/deep-copy (1.13.4): Extracting archive
- Installing phpunit/phpunit (11.5.56): Extracting archive
67 package suggestions were added by new dependencies, use `composer suggest` to s
Generating optimized autoload files
```


完成安裝後會產生example-app的資料夾

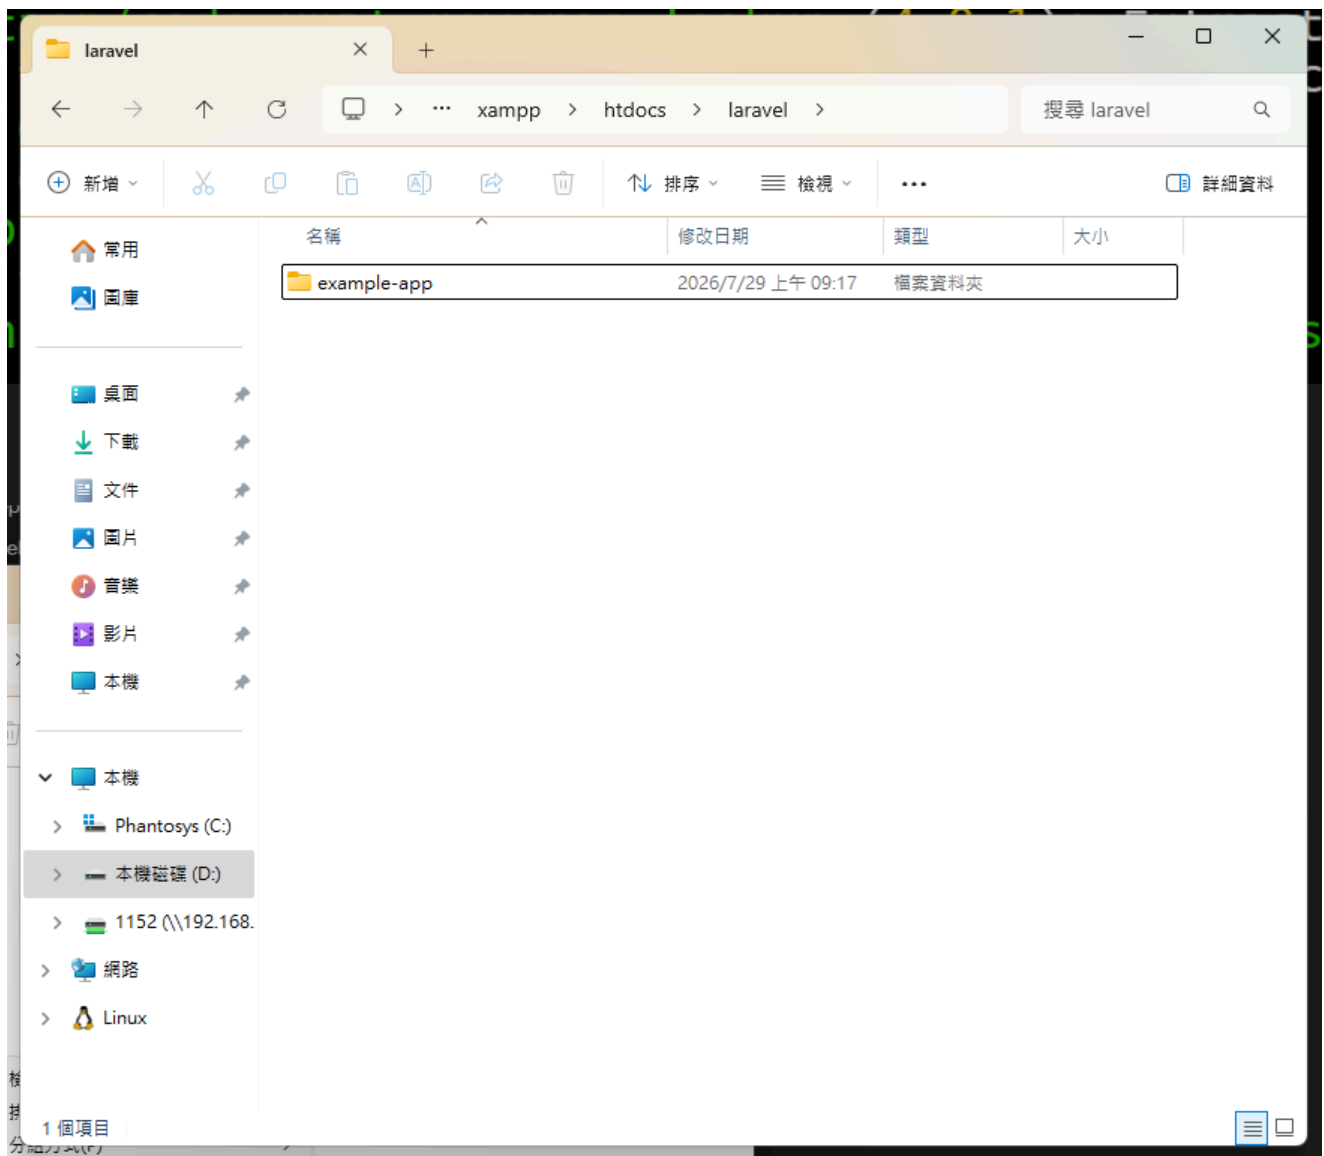

接續到第10版往下找到這兩個指令


"cd example-app":指定到這個資料夾

"php artisan serve":建立、啟動伺服器

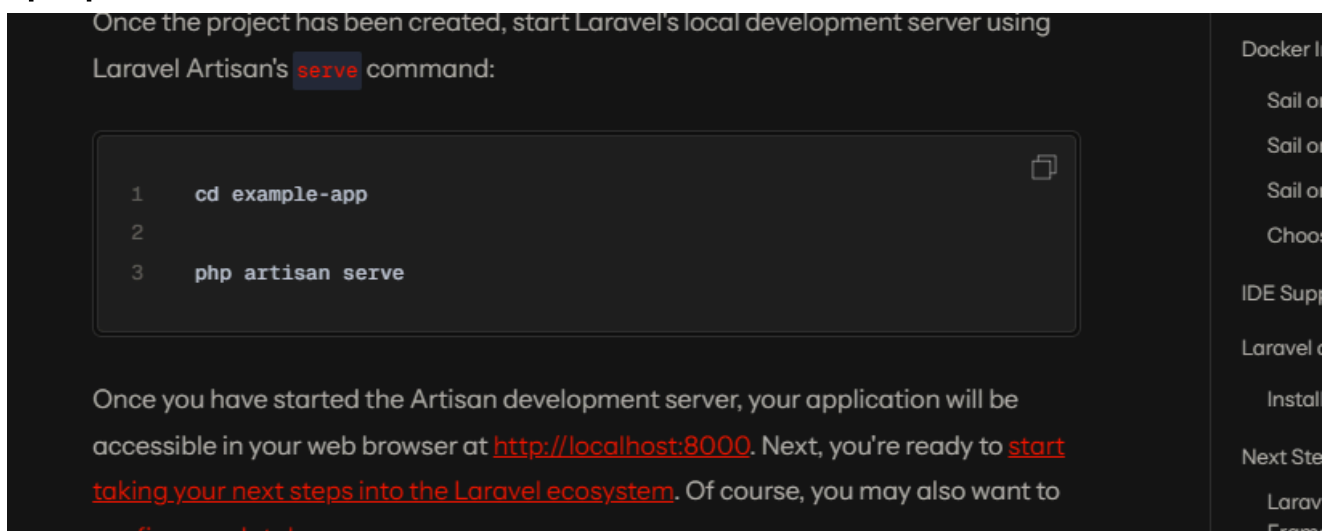


安裝完成會顯示這個畫面，選取之後右鍵複製127.0.0.1的這串網址

```
creating migration table .....  
INFO Running migrations.  
0001_01_01_000000_create_users_table .....  
0001_01_01_000001_create_cache_table .....  
0001_01_01_000002_create_jobs_table .....  
er@1113-13 MINGW64 /d/xampp/htdocs/larave  
er@1113-13 MINGW64 /d/xampp/htdocs/larave  
d example-app  
o artisan serve  
INFO Server running on [http://127.0.0.1:  
Press Ctrl+C to stop the server
```

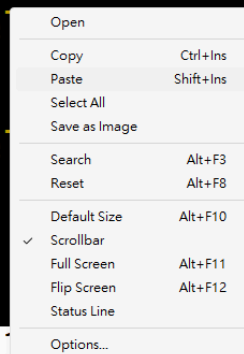

網頁開啟看到這個畫面代表目前階段安裝都正常

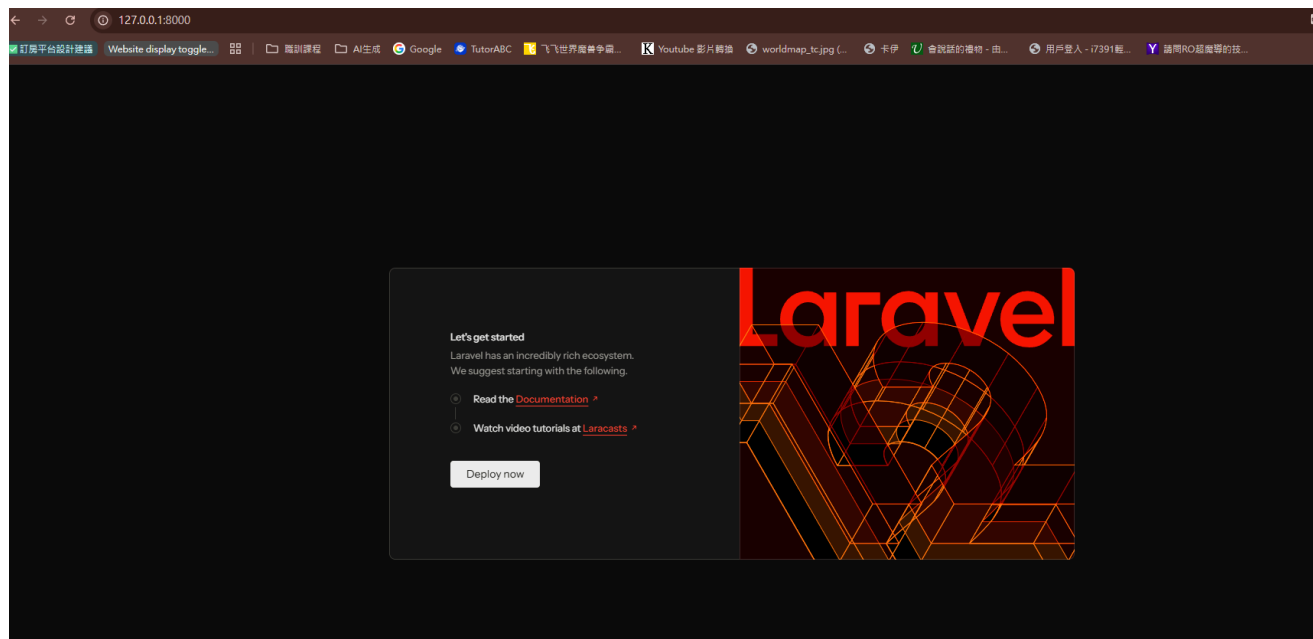

這個畫面中如果按下ctrl+c就會中斷連線，這個畫面的功能就類似xampp的start跟stop

```
MINGW64/d/xampp/htdocs/laravel
> @php artisan migrate --graceful --ansi

INFO Preparing database.

Creating migration table .....

INFO Running migrations.

0001_01_01_000000_create_users_table .....
0001_01_01_000001_create_cache_table .....
0001_01_01_000002_create_jobs_table .....

User@1113-13 MINGW64 /d/xampp/htdocs/laravel
$

User@1113-13 MINGW64 /d/xampp/htdocs/laravel
$ cd example-app

php artisan serve

INFO Server running on [http://127.0.0.1:8000].

Press Ctrl+C to stop the server

2026-07-29 09:28:12 / .....
2026-07-29 09:28:12 /favicon.ico .....
```

修改xampp的路徑，就可以一樣用xampp開啟

```
DocumentRoot "D:/xampp/htdocs/laravel/example-app/public"
<Directory "D:/xampp/htdocs/laravel/example-app/public">
```

```
get('要去的網址','去執行的function'){
return(回傳) view('看到的頁面')
})
```

網址跟頁面可以自己決定，再到view去建立你設定名稱的頁面

routes:web.php->view建立對應檔案(檔名XXX.blade.php)，blade是固定必須要加的

```
// get('/網址','執行動作function') 這個字串 網址 localhost/hello222
// view('') 頁面
Route::get('/hello222', function () {
    return view('table222');
});
```

也可以直接寫回傳顯示的東西而不額外view建立頁面

```
Route::get('/hello', function () {  
    return 'Hello World';  
});
```

顯示結果




Hello World

建立陣列，使用dd這個function會中斷，所以只會列印出第一層的結果

```
15  
16 Route::get('/hello1', function () {  
17     $data=[1,2,3];  
18     $accddata=[  
19         ['id'=>1,'name'=>'aaa','tel'=>'0911'],  
20         ['id'=>1,'name'=>'bbb','tel'=>'0922'],  
21         ['id'=>1,'name'=>'ccc','tel'=>'0933'],  
22     ];  
23     dd($data);  
24     dd($accddata);  
25 });  
26  
27 Route::get('/hello2', function () {
```

dd的列印結果

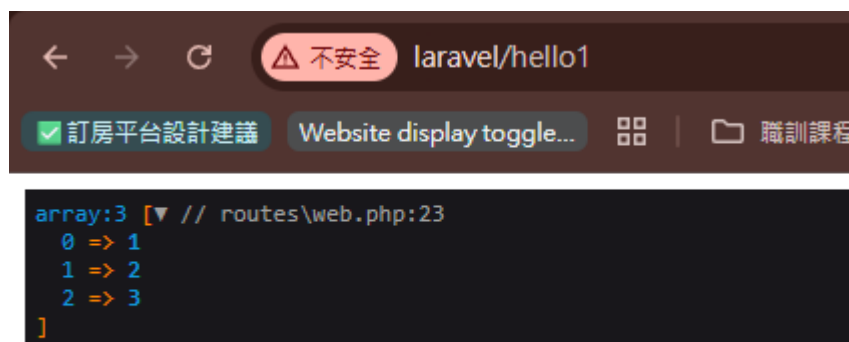

如果使用dump這個function不會中斷，會列印出全部的結果，但缺點是就算中間程式碼錯了也會直接印出後面的結果，會看不到前面的錯誤

```
27 Route::get('/hello2', function () {
28     $data=[1,2,3];
29     $accddata=[
30         ['id'=>1,'name'=>'aaa','tel'=>'0911'],
31         ['id'=>1,'name'=>'bbb','tel'=>'0922'],
32         ['id'=>1,'name'=>'ccc','tel'=>'0933'],
33     ];
34     dump($data);
35     dump($accddata);
36 });
37
38
```


dump的列印結果



```
array:3 [▼ // routes/web.php:34
  0 => 1
  1 => 2
  2 => 3
]

array:3 [▼ // routes/web.php:35
  0 => array:3 [▶]
  1 => array:3 [▶]
  2 => array:3 [▶]
]
```

google搜尋laravel helper連結到官網，這裡可以查詢相關指令跟用法

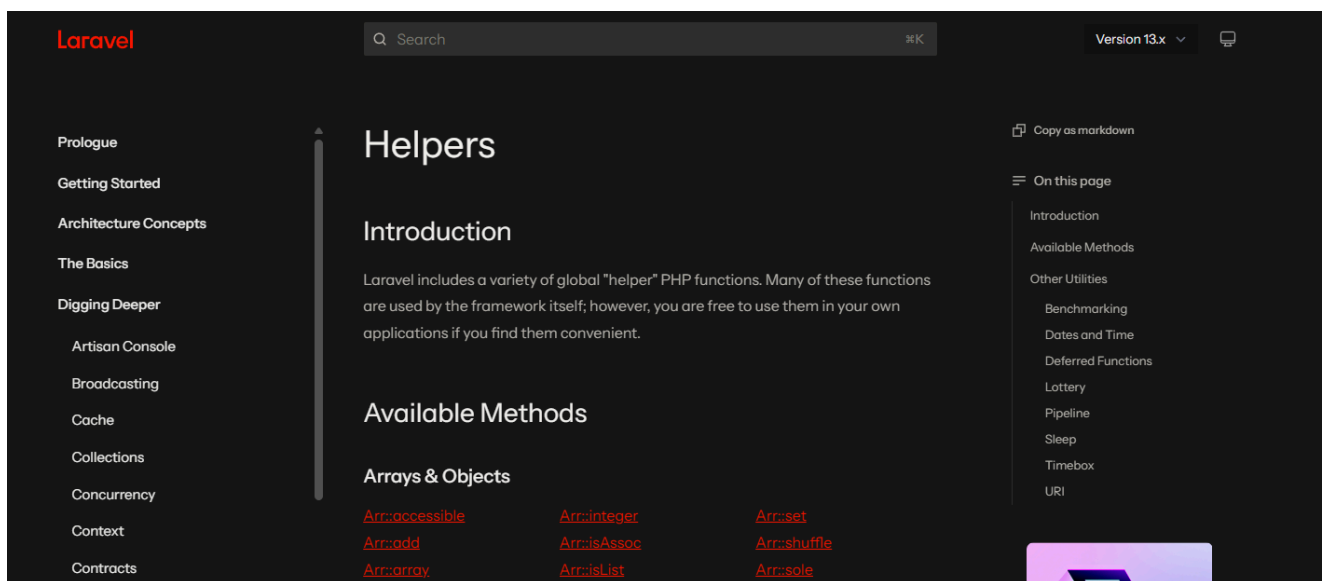

陣列資料可以用compact直接打包，不用
['123'=>'456','123'=>'789','123'=>'666']的方式

```

];
// dd($data);
$test = compact('data');
dd($test);

return view('cal')->with('data', $data);
// return view('cal', ['data' => $data]);


// return view('cal', compact('data'));

// return $tmpText;
;

```

小測試

routes寫Route

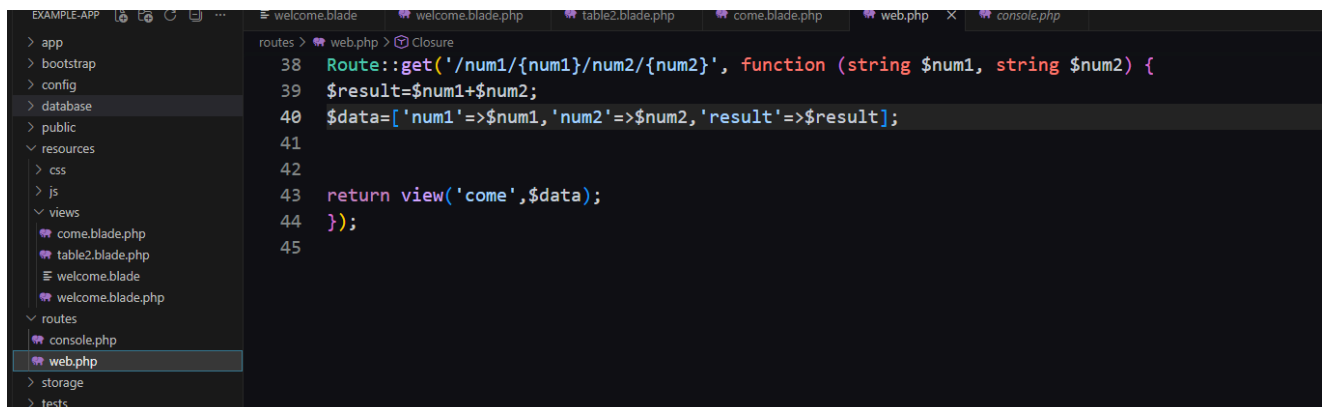


```

routes > web.php > Closure
38 Route::get('/num1/{num1}/num2/{num2}', function (string $num1, string $num2) {
39     $result=$num1+$num2;
40     $data=['num1'=>$num1,'num2'=>$num2,'result'=>$result];
41
42
43     return view('come',$data);
44 });
45

```

傳到views寫come.blade.php

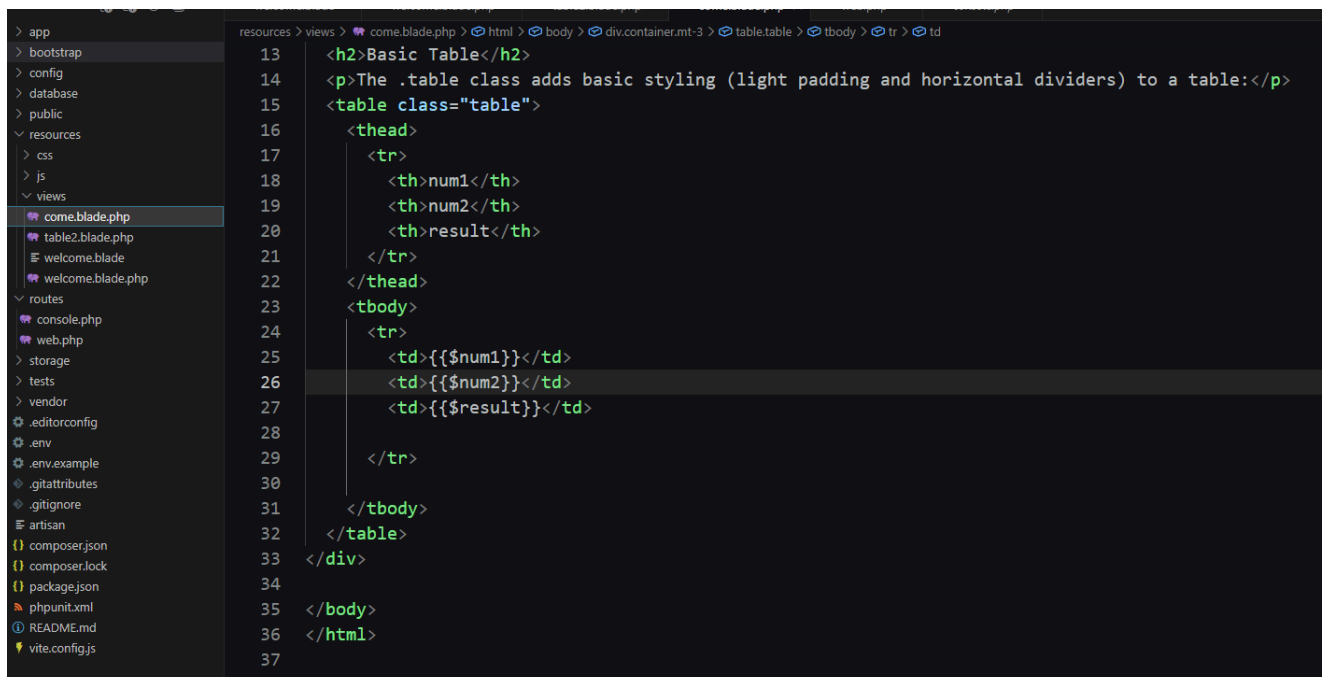


```

resources > views > come.blade.php > html > body > div.container.mt-3 > table.table > tbody > tr > td
13 <h2>Basic Table</h2>
14 <p>The .table class adds basic styling (light padding and horizontal dividers) to a table:</p>
15 <table class="table">
16     <thead>
17         <tr>
18             <th>num1</th>
19             <th>num2</th>
20             <th>result</th>
21         </tr>
22     </thead>
23     <tbody>
24         <tr>
25             <td>{{ $num1 }}</td>
26             <td>{{ $num2 }}</td>
27             <td>{{ $result }}</td>
28         </tr>
29     </tbody>
30 </table>
31 </div>
32
33 </body>
34 </html>
35
36
37


```


顯示結果

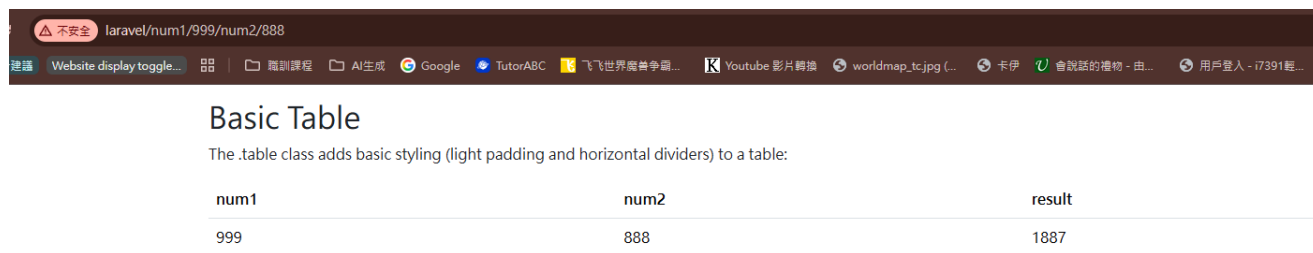


num1	num2	result
999	888	1887

建立controllres，指令中的"UserController"可以設定自己要的名稱

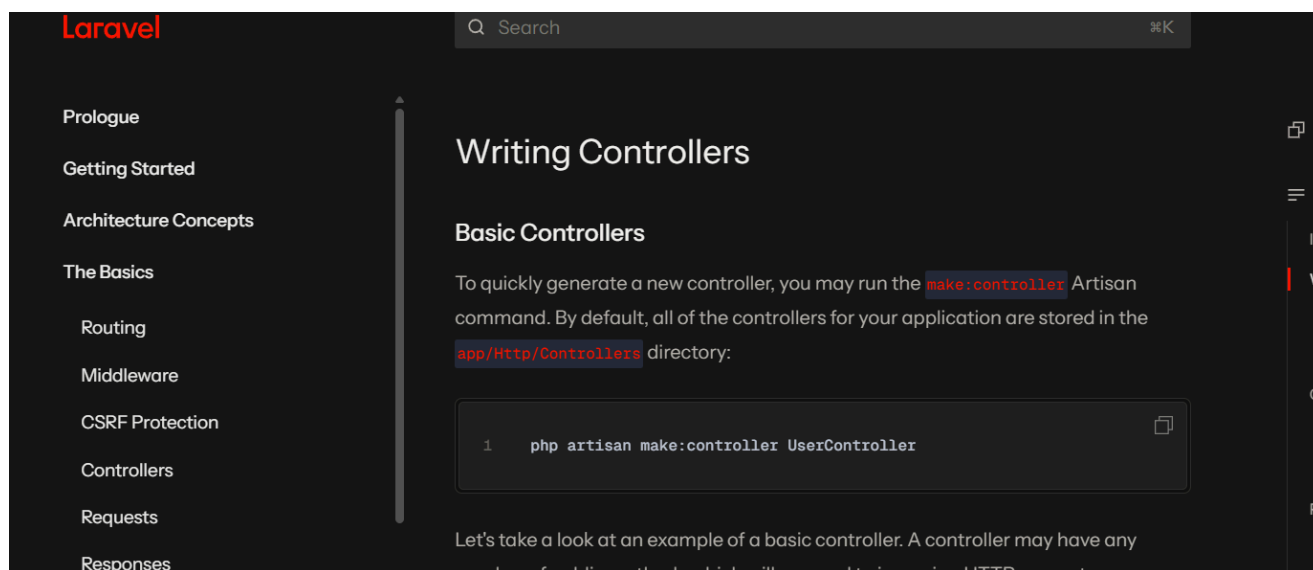

命令提示字元打開資料夾輸入指令

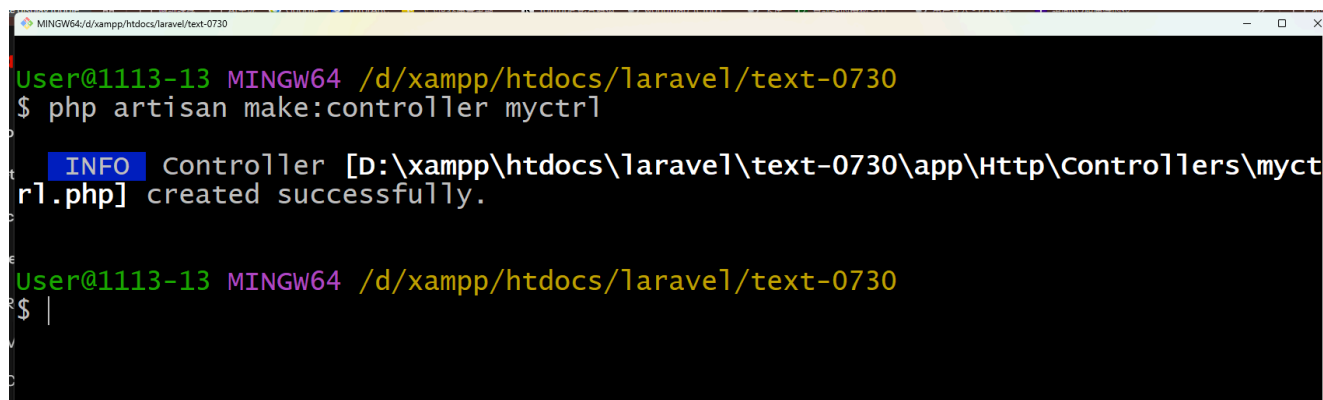


```
User@1113-13 MINGW64 /d:/xampp/htdocs/laravel/text-0730
$ php artisan make:controller myctrl

INFO Controller [D:\xampp\htdocs\laravel\text-0730\app\Http\Controllers\myctrl.php] created successfully.

User@1113-13 MINGW64 /d:/xampp/htdocs/laravel/text-0730
$ |
```

完成後在app/http資料夾底下就會建立php檔

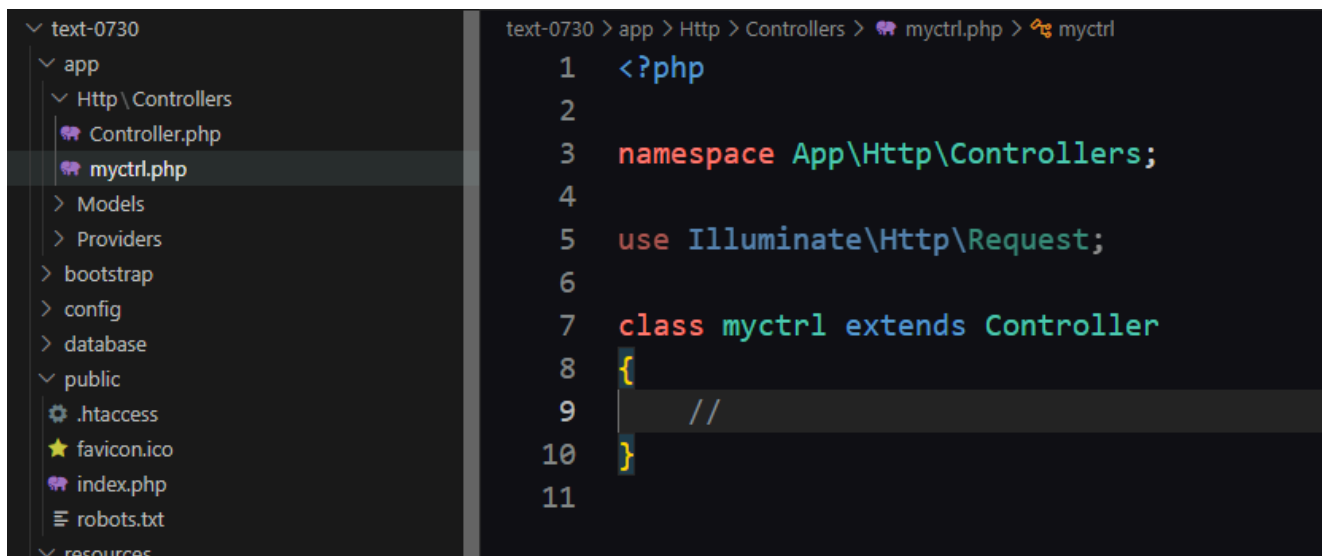


The image shows a file explorer on the left with the directory structure of a Laravel application. The 'app' directory is expanded, showing 'Http' and 'Controllers'. A new file 'myctrl.php' has been created under 'Http \ Controllers'. On the right, the code editor shows the content of 'myctrl.php'.

```
text-0730 > app > Http > Controllers > myctrl.php > myctrl

1  <?php
2
3  namespace App\Http\Controllers;
4
5  use Illuminate\Http\Request;
6
7  class myctrl extends Controller
8  {
9      //
10 }
11
```

官網controllres下方指令整段複製到剛剛建立的檔案

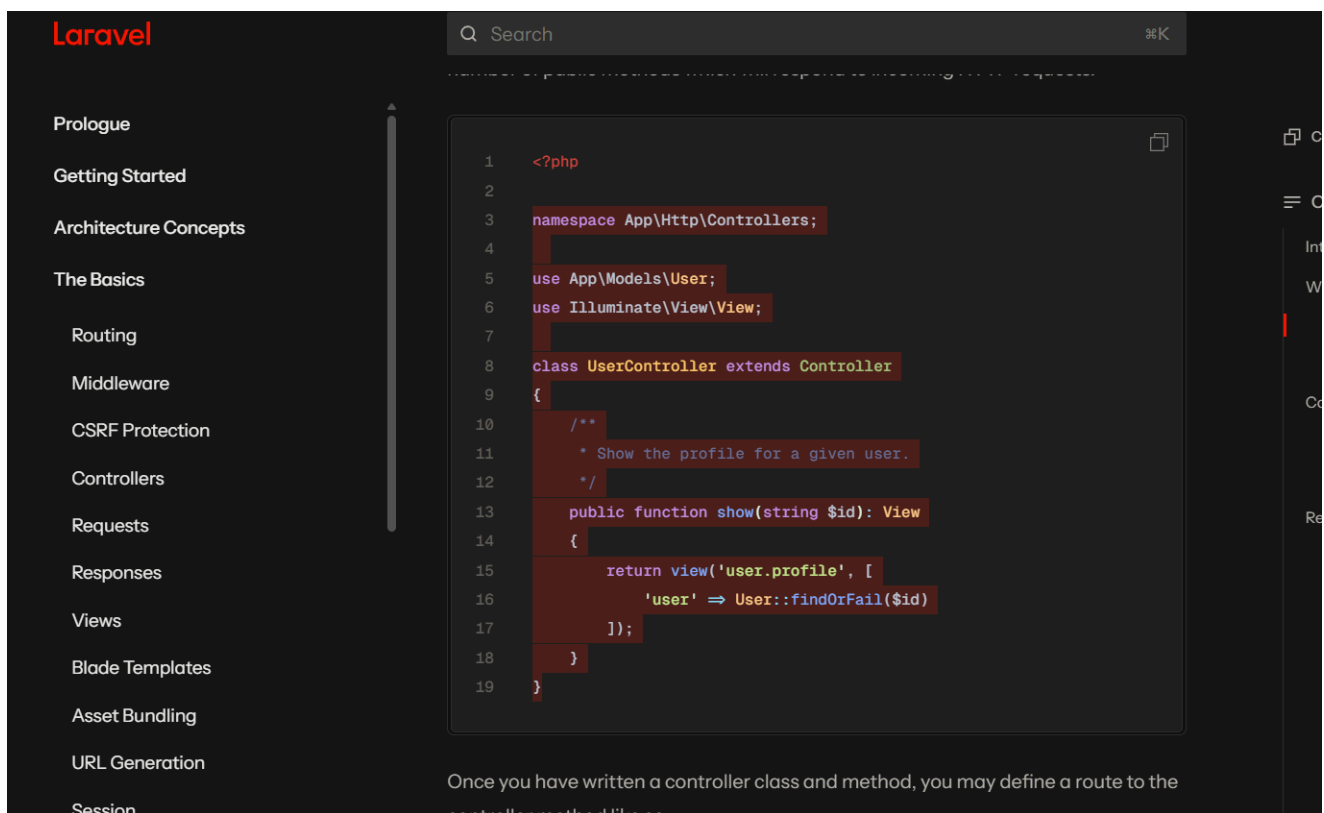

The image shows the Laravel documentation website. On the left is a sidebar with a list of topics. The main content area displays the code for the 'UserController' class, which is highlighted in a dark theme. The code includes namespace declarations, use statements, and a 'show' method that returns a view.

Laravel

Search %K

Prologue

Getting Started

Architecture Concepts

The Basics

Routing

Middleware

CSRF Protection

Controllers

Requests

Responses

Views

Blade Templates

Asset Bundling

URL Generation

Session

```
1  <?php
2
3  namespace App\Http\Controllers;
4
5  use App\Models\User;
6  use Illuminate\View\View;
7
8  class UserController extends Controller
9  {
10     /**
11      * Show the profile for a given user.
12      */
13     public function show(string $id): View
14     {
15         return view('user.profile', [
16             'user' => User::findOrFail($id)
17         ]);
18     }
19 }
```

Once you have written a controller class and method, you may define a route to the controller method like so: