

2027-07-29 Larevel的安裝指南

- 1.進入 laravel.com 國外版本，最新
- 2.安裝 composer

 getcomposer.org



A Dependency Manager for PHP

Latest: **2.10.2** ([changelog](#))

[Getting Started](#)

[Download](#)

[Documentation](#)

[Browse Packages](#)

[Issues](#)

[GitHub](#)

Authors: [Nils Adermann](#), [Jordi Boggiano](#) and many [community contributions](#)

Commercial support & consulting available through:

 **PRIVATE PACKAGIST**

[Sponsor Composer & Packagist.org](#)

Logo by: [Max Grigorian](#)

Composer and all content on this site are released under the [MIT license](#).



Download Composer

Latest: v2.10.2



PRIVATE PACKAGIST

Secure & reliable package repository

Windows Installer

The installer - which requires that you have PHP already installed - will download Composer for you and set up your PATH environment variable so you can simply call `composer` from any directory.

Download and run [Composer-Setup.exe](#) - it will install the latest composer version whenever it is executed.

Command-line installation

To quickly install Composer in the current directory, run the following script in your terminal. To automate the installation, use [the guide on installing Composer programmatically](#).

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
php -r "if (hash_file('sha384', 'composer-setup.php') === 'c8b085408188070d5f52bcfe4ecfbee5f727afa458b2573b8eaa
php composer-setup.php
php -r "unlink('composer-setup.php');"
```

This installer script will simply check some `php.ini` settings, warn you if they are set incorrectly, and then download the latest `composer.phar` in the current directory. The 4 lines above will, in order:

- Download the installer to the current directory
- Verify the installer SHA-384, which you can also [cross-check here](#)
- Run the installer
- Remove the installer

Most likely, you want to put the `composer.phar` into a directory on your PATH, so you can simply call `composer` from any directory (*Global install*), using for example:

選擇「Composer-Setup.exe」並下載、安裝 (走預設值)

打開git bash

輸入 composer 確認有完成

```

User@1113-08 MINGW64 ~
$ composer

Composer version 2.10.2 2026-07-01 11:24:45

Usage:
  command [options] [arguments]

Options:
  -h, --help                Display help for the given command. When no com
mand is given display help for the list command
  -q, --quiet                Do not output any message
  -V, --version              Display this application version
  --ansi|--no-ansi           Force (or disable --no-ansi) ANSI output
  -n, --no-interaction       Do not ask any interactive question
  --profile                  Display timing and memory usage information
  
```

獲得不同版本的 laravel

指令：

composer global require laravel/installer

找 版本 10.0 -> 改12.0

composer create-project "laravel/laravel:^10.0" example-app

composer create-project "laravel/laravel:^12.0" example-app

```
MINGW64/d:/xampp/htdocs/laravel
INFO No publishable resources for tag [laravel-assets].
No security vulnerability advisories found.
> @php artisan key:generate --ansi
INFO Application key set successfully.
> @php -r "file_exists('database/database.sqlite') || touch('database/database.sqlite');"
> @php artisan migrate --graceful --ansi
INFO Preparing database.
Creating migration table ..... 3.72ms DONE
INFO Running migrations.
0001_01_01_000000_create_users_table ..... 6.78ms DONE
0001_01_01_000001_create_cache_table ..... 3.94ms DONE
0001_01_01_000002_create_jobs_table ..... 6.00ms DONE
User@1113-08 MINGW64 /d:/xampp/htdocs/laravel
$
```

安裝完成後，進入安裝路徑

指令：cd example-app


```
User@1113-08 MINGW64 /d:/xampp/htdocs/laravel
$ cd example-app/
User@1113-08 MINGW64 /d:/xampp/htdocs/laravel/example-app
$ ls
README.md  bootstrap/  config/  phpunit.xml  routes/  vendor/
app/        composer.json  database/  public/  storage/  vite.config.js
artisan*    composer.lock  package.json  resources/  tests/
User@1113-08 MINGW64 /d:/xampp/htdocs/laravel/example-app
$
```

進入路徑後，將serve啟動

指令：php artisan serve

```
User@1113-08 MINGW64 /d:/xampp/htdocs/laravel/example-app
$ php artisan serve
INFO Server running on [http://127.0.0.1:8000].
Press Ctrl+C to stop the server
2026-07-29 09:28:05 / ..... ~ 0.25ms
2026-07-29 09:28:05 /favicon.ico ..... ~ 0.08ms
```

進入瀏覽器，輸入 localhost:8000

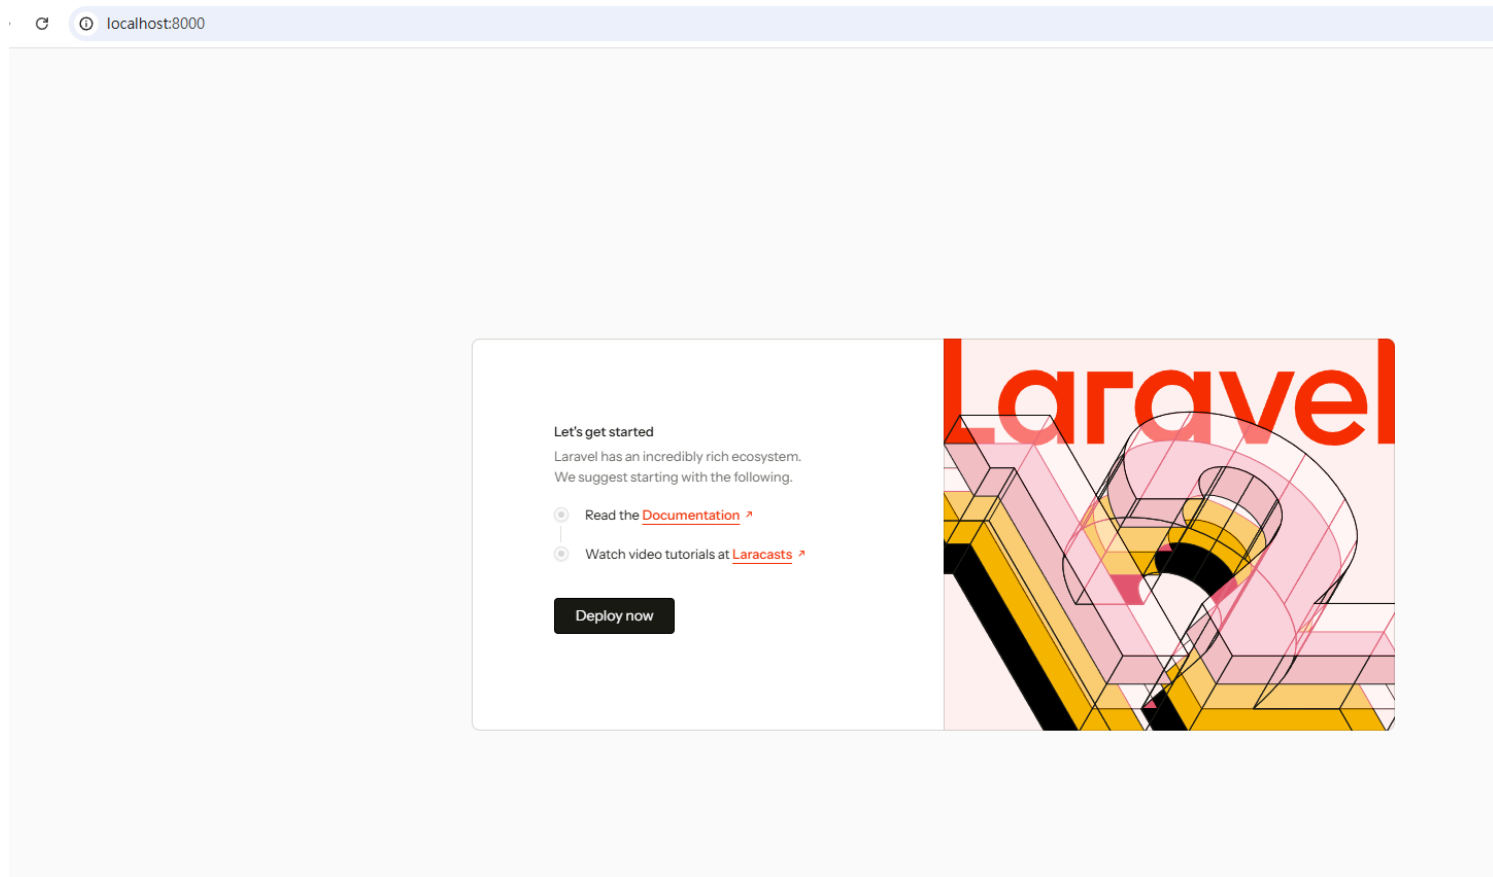

部分Linux指令

Ctrl + L = 清除畫面

cd .. = 回到上一層

cd 目錄 進入指定目錄


history 歷史指令

ls 當層目錄列表

```
MINGW64/d:/xampp/htdocs/laravel/example-app
40 cd ..
41 git clone https://github.com/mackliu/115-PHP.git
42 git clone https://github.com/mackliu/115-PHP.git
43 git init
44 git add .
45 git commit -m "first commit"
46 git branch -M main
47 git remote add origin https://github.com/hhj962696-ui/project.git
48 git push -u origin main
49 git clone https://github.com/hhj962696-ui/project.git
50 git init
51 composer create-project "laravel/laravel:^12.0" example-app
52 composer create-project "laravel/laravel:^12.0" example-app
53 composer create-project "laravel/laravel:^12.0" example-app
54 cd example-app
55 cd example-app/
56 ls
57 php artisan serve
58 php artisan serve
59 history
60 history

User@1113-08 MINGW64 /d:/xampp/htdocs/laravel/example-app
$
```

將指定路徑調整至XAMPP中

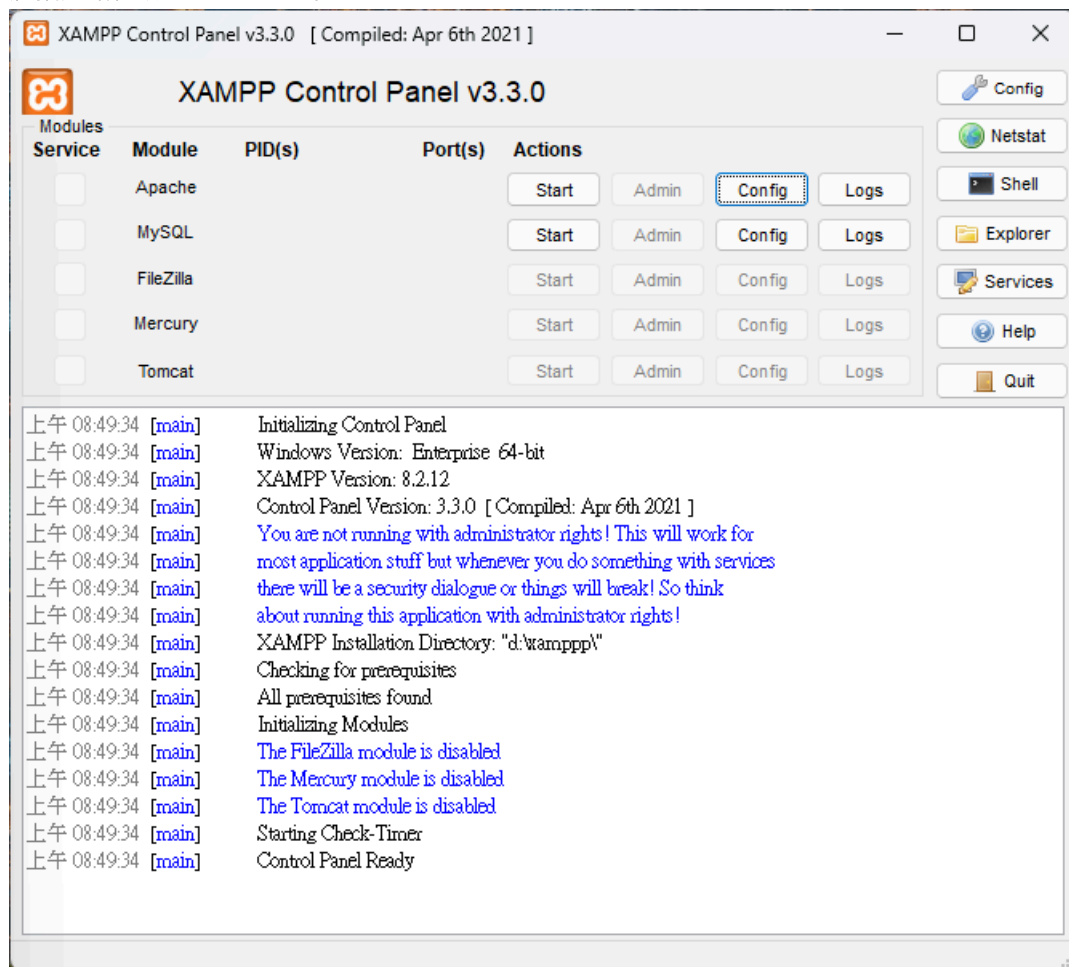

進入 Apache -> config 調整

DocumentRoot "D:/xampp/htdocs/laravel/example-app/public"

<Directory "D:/xampp/htdocs/laravel/example-app/public">

利用 VS CODE編輯 .\resources\views\welcome.blade.php

將Let's get started 稍微做點修改

```
enter justify-center w-full transition-opacity opacity-
w-[335px] w-full flex-col-reverse lg:max-w-4xl lg:fl
[13px] leading-[20px] flex-1 p-6 pb-12 lg:p-20 bg-whit
-1 font-medium">Let's get started 11111</h1>
2 text-[#706f6c] dark:text-[#A1A09A]">Laravel has an
ex flex-col mb-4 lg:mb-6">
="flex items-center gap-4 py-2 relative before:border
class="relative py-1 bg-white dark:bg-[#161615]">
span class="flex items-center justify-center rounded-
<span class="rounded-full bg-[#dbdbd7] dark:bg-[#3
/ span>
```

Let's get started 11111

Laravel has an incredibly rich ecosystem.
We suggest starting with the following.

- Read the [Documentation](#) ↗
- Watch video tutorials at [Laracasts](#) ↗

Deploy now



設計原理

- 1.慣例優於配置 (Convention over Configuration)
- 2.Don't Repeat Yourself (不要重複你自己)