


2027-07-30 Route 與 資料(變數)的傳遞應用

1.web.php 的變數初步設計

```
Route::get('/num1/{post}/num2/{comment}', function (string $postId, string $commentId) {  
    //return view('sum');  
    // 傳送資料給 resources/views/sum.blade.php  
    return view('sum', [  
        'postId' => $postId,  
        'commentId' => $commentId  
    ]);  
});
```

2.建立「sum.blade.php」

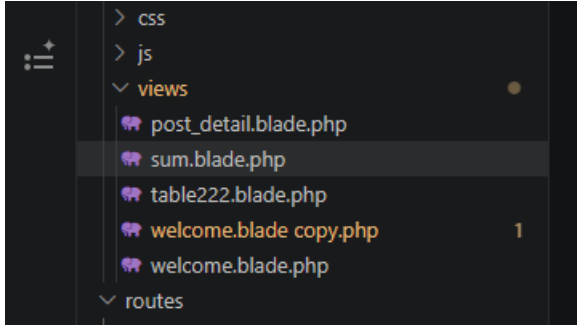

3.sum.blade.php的架構設計

```
<body>  
    <h1>Laravel sum 的練習</h1>  
    <div class="card">  
        <h3>數字1: {{ $postId }}</h3>  
        <h3>數字2: {{ $commentId }}</h3>  
        <h3>總和 = {{ $commentId + $postId }}</h3>  
    </div>  
</body>
```

resources > views > sum.blade.php > html > body > div.card > h3

3

4 <head>

5 <meta charset="UTF-8">

6 <meta name="viewport" content="width=device-width, initial-scale=1">

7 <title>Document</title>

8 </head>

9

10 <body>

11

12 <h1>Laravel sum 的練習</h1>

13

14 <div class="card">

15 <h3>數字1: {{ \$postId }}</h3>

16 <h3>數字2: {{ \$commentId }}</h3>

17 <h3>總和 = {{ \$commentId + \$postId }}</h3>

18 </div>

19

20

21 </body>

22

23 </html>