

首先先安裝三個

- 1.git Bash
- 2.composer
- 3.laravel

安裝步驟都以原預設的為主，先不要變動，因為教學上大家都會以預設的說明，以免搞混!



=> 安裝 git Bash

=> 安裝composer

larave.com 國外版本的 最新

laravel.tw 國內 不要 版本到 5.3

<https://getcomposer.org/>

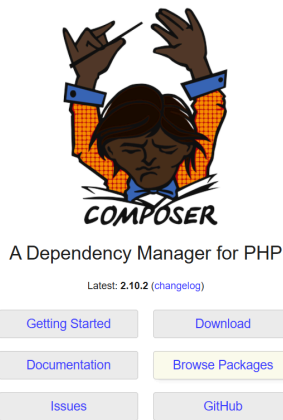

[Download](#)



Download Composer Latest: v2.10.2

PRIVATE PACKAGIST
Secure & reliable package repository

Windows Installer

The installer - which requires that you have PHP already installed - will download Composer for you and set up your PATH environment variable so you can simply call `composer` from any directory.

Download and run [Composer-Setup.exe](#) - It will install the latest composer version whenever it is executed.

Command-line installation

To quickly install Composer in the current directory, run the following script in your terminal. To automate the installation, use the [guide on](#)

I run **Composer-Setup.exe** - it will

=> Laravel 要到官網下載 <https://laravel.com/docs/10.x>

版本

composer global require laravel/installer

composer create-project "laravel/laravel:^10.0" example-app



composer create-project "laravel/laravel:^12.0" example-app


composer create-project "laravel/laravel:^12.0" test0730 (練習建立一個新的檔案夾)

composer create-project "laravel/laravel:^12.0" s2026072901--init

composer global require laravel/installer test0729 (版本因最新所以不能灌成功 與XAMPP衝突)

composer create-project "laravel/laravel:^12.0" test072902

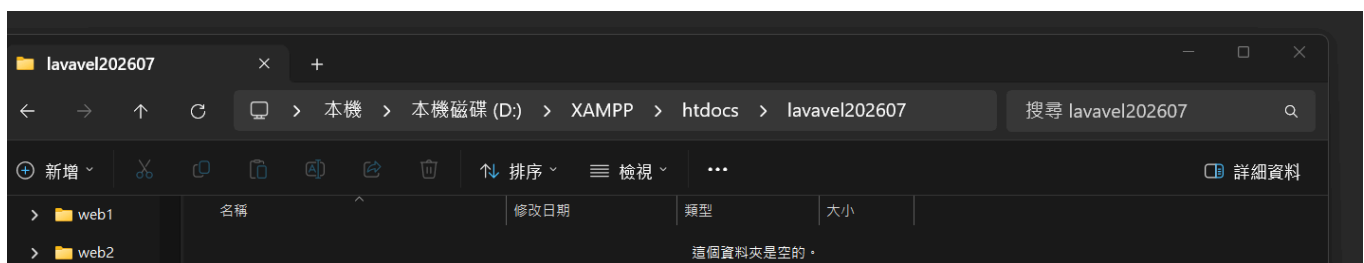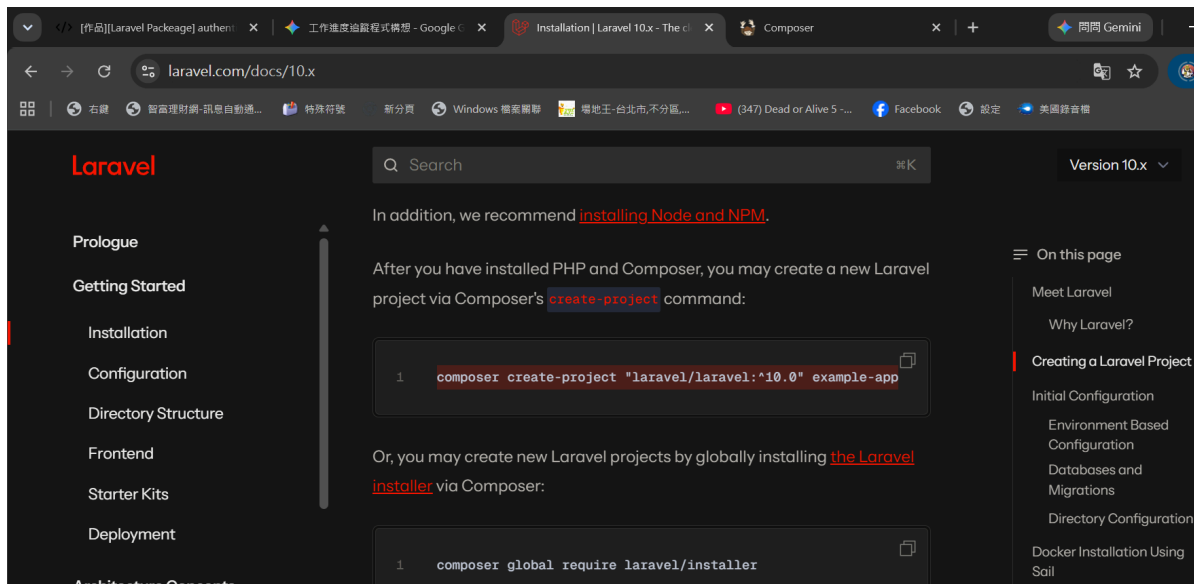

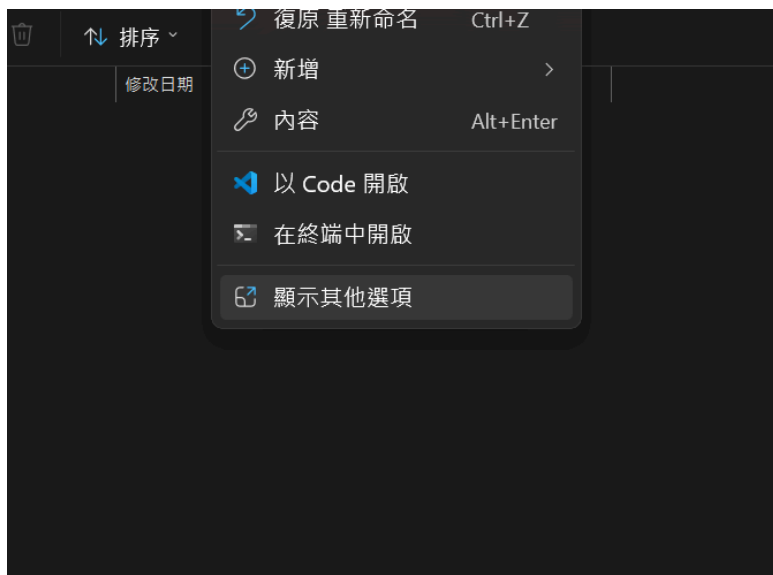

貼上這兩個

```
cd example-app
```

```
php artisan serve
```

```

MINGW64/d/XAMPP/htdocs/laravel/202607

User@1113-04 MINGW64 /d/XAMPP/htdocs/laravel/202607
$ composer create-project "laravel/laravel:10.0" example
app
Creating a "laravel/laravel:10.0" project at "../example"
Installing laravel/laravel (v10.3.3)
- Downloading laravel/laravel (v10.3.3)
- Installing laravel/laravel (v10.3.3): Extracting archive
Created project in D:\XAMPP\htdocs\laravel\202607\example
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
Updating dependencies
Your requirements could not be resolved to an installable set of packages.

Problem 1
- Root composer.json requires laravel/framework ^10.10, found laravel/framework[v10.10.0, ..., 10.50.2] but these were not loaded, because they are affected by security advisories ("PKSA-m5cs-tyl6-qpcs", "PKSA-3r5d-mb8f-lqw9", "PKSA-mdq4-5lck-6kdd", "PKSA-8qxs-n5y5-vvnd", "PKSA-w7xr-vk7n-rstm"). Go to https://packa.gist.org/security-advisories/ to find advisory details. To ignore the advisories, add their IDs to the "policy.advisories.ignore-ids" config or add the package to "policy.advisories.ignore". To turn the feature off entirely, you can set "policy.advisories.block" to false.

bash: app: command not found

User@1113-04 MINGW64 /d/XAMPP/htdocs/laravel/202607
$ "[[200-composer create-project "laravel/laravel:12.0" example
bash: $'\E[200-composer': command not found


User@1113-04 MINGW64 /d/XAMPP/htdocs/laravel/202607
$ appcomposer create-project "laravel/laravel:12.0" example
app
bash: appcomposer: command not found
bash: app: command not found

User@1113-04 MINGW64 /d/XAMPP/htdocs/laravel/202607
$ cd example-app
bash: cd: example-app: No such file or directory

User@1113-04 MINGW64 /d/XAMPP/htdocs/laravel/202607
$ php artisan serve
Could not open input file: artisan

User@1113-04 MINGW64 /d/XAMPP/htdocs/laravel/202607
$ |

```

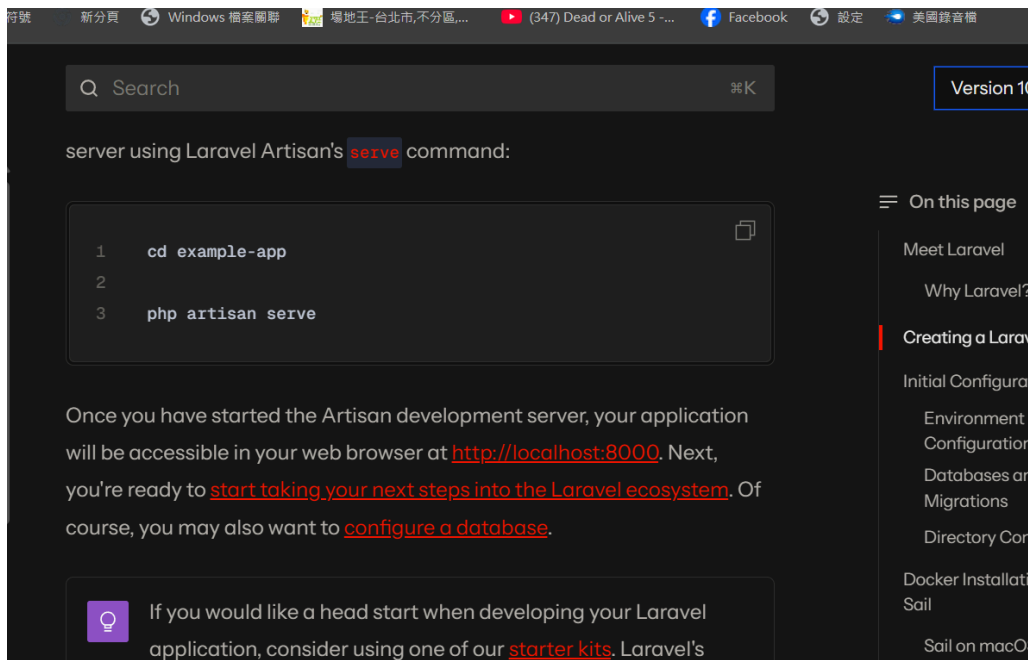


打LS


建置

```
composer create-project "laravel/laravel:^12.0" test0729
```


```
MINGW64; d:/XAMPP/htdocs/laravel202607
- Installing league/flysystem (3.35.2): Extracting archive
- Installing nette/utils (v4.1.5): Extracting archive
- Installing nette/schema (v1.3.5): Extracting archive
- Installing dflydev/dot-access-data (v3.0.3): Extracting archive
- Installing league/config (v1.2.0): Extracting archive
- Installing league/commonmark (2.8.3): Extracting archive
- Installing laravel/serializable-closure (v2.0.15): Extracting archive
- Installing laravel/prompts (v0.3.21): Extracting archive
- Installing laravel/framework (v12.64.0): Extracting archive
- Installing laravel/pail (v1.2.7): Extracting archive
- Installing laravel/pint (v1.30.0): Extracting archive
- Installing symfony/yaml (v7.4.14): Extracting archive
- Installing laravel/sail (v1.64.0): Extracting archive
- Installing nikic/php-parser (v5.8.0): Extracting archive
- Installing psy/psysh (v0.12.24): Extracting archive
- Installing laravel/tinker (v2.11.1): Extracting archive
- Installing hamcrest/hamcrest-php (v2.1.1): Extracting archive
- Installing mockery/mockery (1.6.12): Extracting archive
- Installing filp/whoops (2.18.4): Extracting archive
- Installing nunomaduro/collision (v8.9.5): Extracting archive
- Installing staabm/side-effects-detector (1.0.5): Extracting archive
- Installing sebastian/version (5.0.2): Extracting archive
- Installing sebastian/type (5.1.3): Extracting archive
- Installing sebastian/recursion-context (6.0.3): Extracting archive
- Installing sebastian/object-reflector (4.0.1): Extracting archive
- Installing sebastian/object-enumerator (6.0.1): Extracting archive
- Installing sebastian/global-state (7.0.2): Extracting archive
- Installing sebastian/exporter (6.3.2): Extracting archive
- Installing sebastian/environment (7.2.1): Extracting archive
- Installing sebastian/diff (6.0.2): Extracting archive
- Installing sebastian/comparator (6.3.3): Extracting archive
- Installing sebastian/code-unit (3.0.3): Extracting archive
- Installing sebastian/cli-parser (3.0.2): Extracting archive
- Installing phpunit/php-timer (7.0.1): Extracting archive
- Installing phpunit/php-text-template (4.0.1): Extracting archive
- Installing phpunit/php-invoker (5.0.1): Extracting archive
- Installing phpunit/php-file-iterator (5.1.1): Extracting archive
- Installing theseer/tokenizer (1.3.1): Extracting archive
- Installing sebastian/lines-of-code (3.0.1): Extracting archive
- Installing sebastian/complexity (4.0.1): Extracting archive
- Installing sebastian/code-unit-reverse-lookup (4.0.1): Extracting archive
- Installing phpunit/php-code-coverage (11.0.12): Extracting archive
- Installing phar-io/version (3.2.1): Extracting archive
- Installing phar-io/manifest (2.0.4): Extracting archive
- Installing myclabs/deep-copy (1.13.4): Extracting archive
- Installing phpunit/phpunit (11.5.56): Extracting archive
70 package suggestions were added by new dependencies, use 'composer suggest' to see details.
Generating optimized autoload files
```

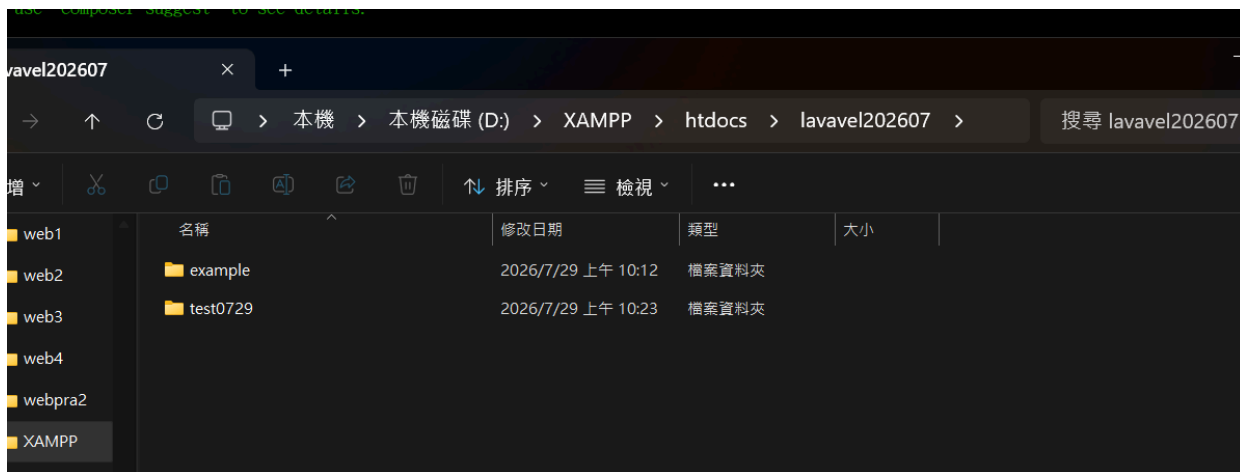


建置 composer create-project "laravel/laravel:^12.0" test072902

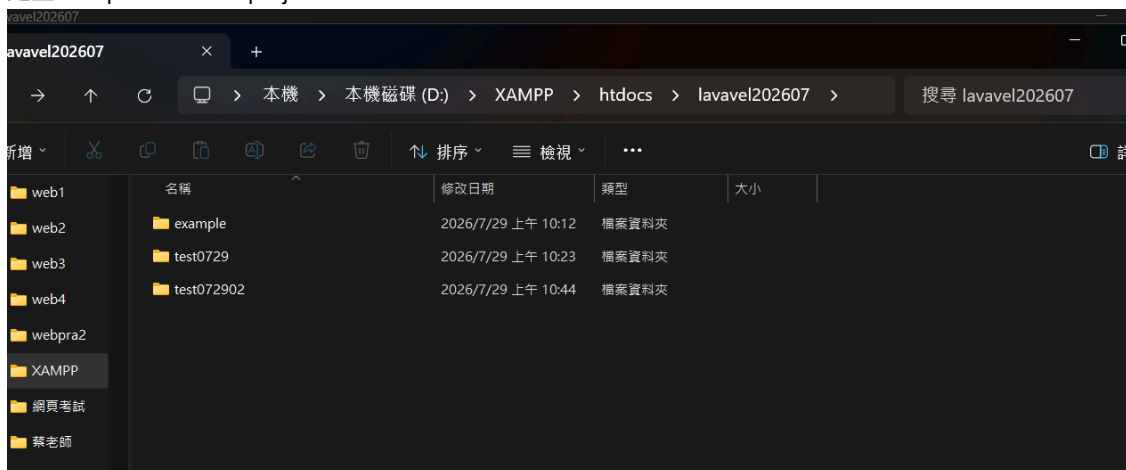

刪除檔案的話，可以直接刪除即可！

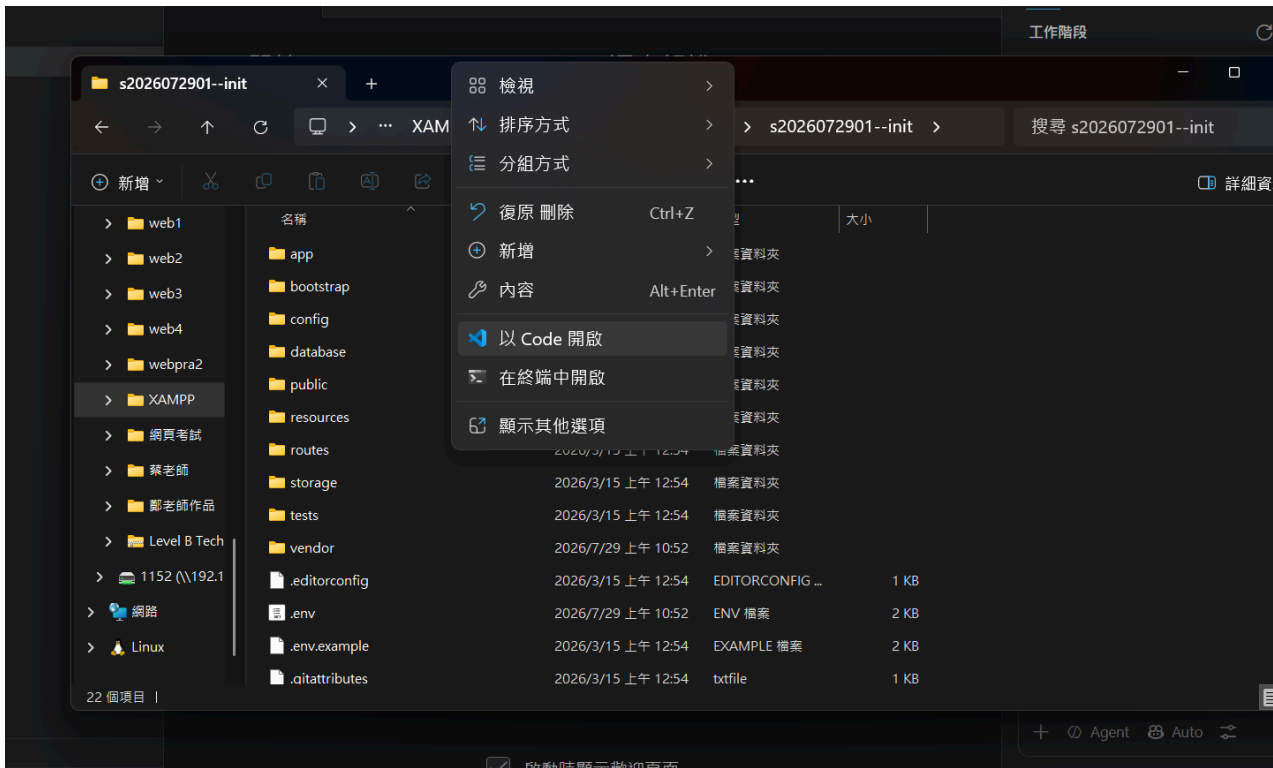


修改位置

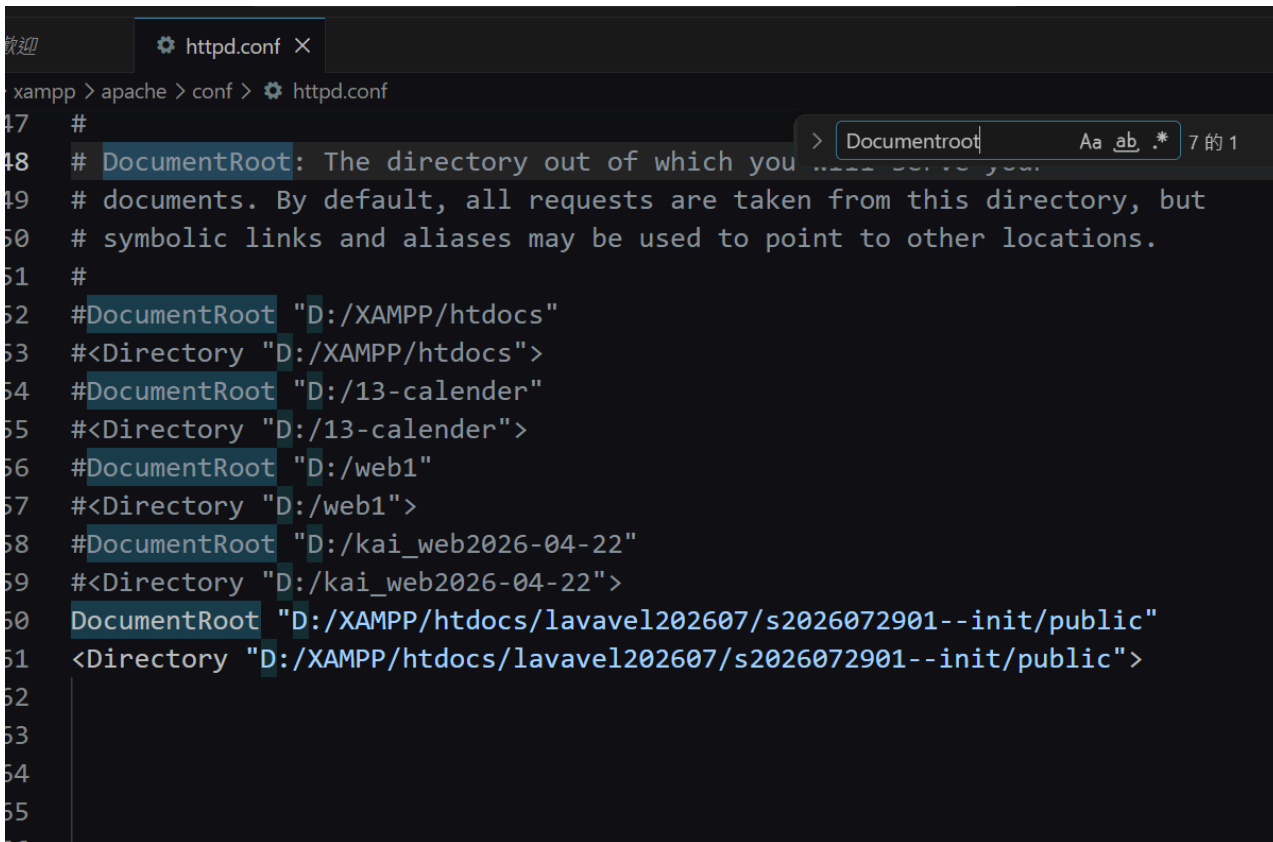

設計原理

- 1.Convention over Configuration 慣例優於設定
- 2.Don't Repeat Yourself 不要重複造輪子

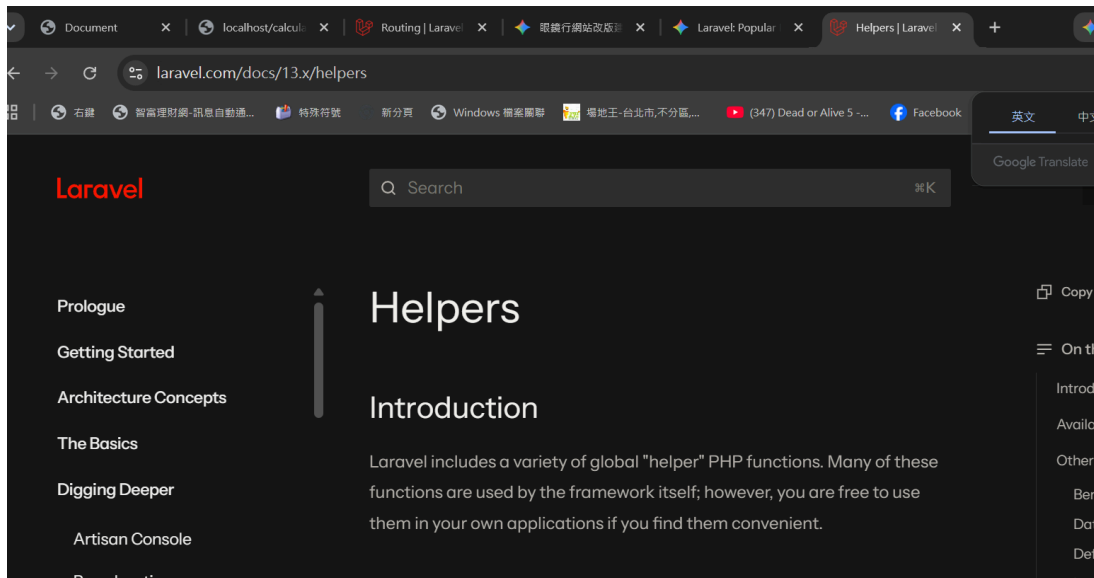

備註:


簡單來說，這三者的關係就是：**工具（Git Bash）** 裝了 **軟體包管家（Composer）**，然後用這個管家安裝並運行 **網站框架（Laravel）**。

把它們想像成做菜的話：

- **Laravel** 是**蛋糕食譜與材料包**：它是一個用 PHP 語言寫好的網站開發框架，幫你把網站的基本架構（如會員登入、資料庫連線、網址路由）都寫好了，讓你不用從頭發明輪子。
- **Composer** 是**外送員 / 材料採購員**（PHP 的套件管理工具）：Laravel 本身包含很多現成的套件，自己一個人手動下載這些套件會瘋掉。Composer 會幫你把 Laravel 和它需要的各種工具一次買齊並安裝妥當。
- **Git Bash** 是**廚房工作台**（指令列介面 Terminal）：它是你在 Windows 電腦上用來輸入指令的小黑窗。你可以在 Git Bash 裡面輸入指令給 Composer，讓它去下載 Laravel。

按F12 回底層(可以了解更底層學習 了解核心概念)

laravel的 MVC 架構圖

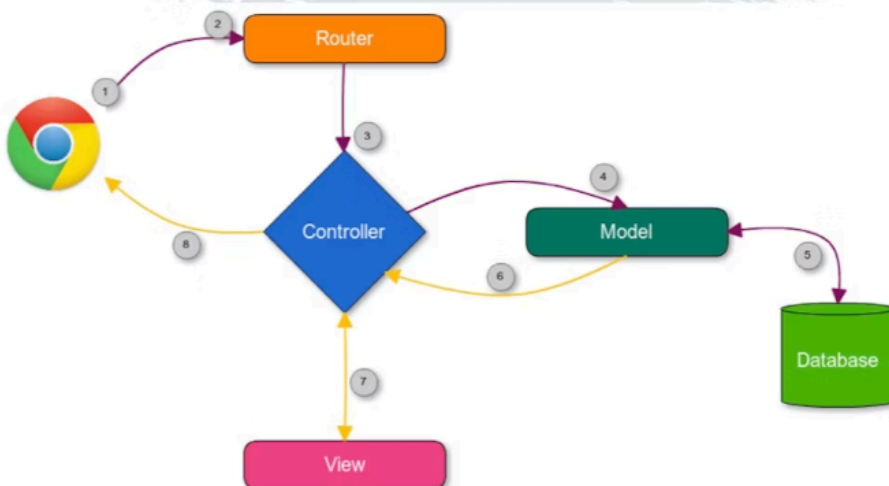

整體運作流程看一眼

使用者發出請求 (例如點擊網址)



1. Route (後端) → 看懂網址，決定交給哪個 Controller



2. Controller (後端) → 處理邏輯，向資料庫拿資料



→ (情境 A: 傳統網頁) → 傳給 View (前端) 繪製 HTML 畫面

→ (情境 B: API 模式) → 直接回傳 JSON 資料給前端框架 (Vue/React)

路徑

xampp~>htdocs~>

貼上 建置新的

```
composer create-project "laravel/laravel:^12.0" s2026073001
```

```
MINGW64/d/kai_web2026-04-22/s20260729 laravel
0001_01_01_000000_create_users_table ..... 7.18ms DONE
0001_01_01_000001_create_cache_table ..... 4.41ms DONE
0001_01_01_000002_create_jobs_table ..... 6.40ms DONE

User@1113-04 MINGW64 /d/kai_web2026-04-22/s20260729 laravel (main)
$ composer create-project "laravel/laravel:^12.0" s2026073001
Creating a "laravel/laravel:^12.0" project at "./s2026073001"
Installing laravel/laravel (v12.12.2)
- Installing laravel/laravel (v12.12.2): Extracting archive
Created project in D:\kai_web2026-04-22\s20260729 laravel\s2026073001
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
Updating dependencies
```

安裝後打他的位置

```
cd s2026073001
```


```
php artisan
```

進入XAMPP修改檔案路徑

```
httpd.conf
D: > xampp > apache > conf > httpd.conf
254 #DocumentRoot "D:/13-calender"
255 #<Directory "D:/13-calender">
256 #DocumentRoot "D:/web1"
257 #<Directory "D:/web1">
258 #DocumentRoot "D:/kai_web2026-04-22"
259 #<Directory "D:/kai_web2026-04-22">
260 #DocumentRoot "D:/XAMPP/htdocs/laravel202607/s2026072901--init/public"
261 #<Directory "D:/XAMPP/htdocs/laravel202607/s2026072901--init/public">
262 DocumentRoot "D:/XAMPP/htdocs/laravel202607/s2026073001/public"
263 <Directory "D:/XAMPP/htdocs/laravel202607/s2026073001/public">|
264
265
266
267
268
269
```


1. s2026073001
2. route: /sum/num1/100/num2/200
3. view: sum.blade.php (.blade 樣板引擎)

轉址

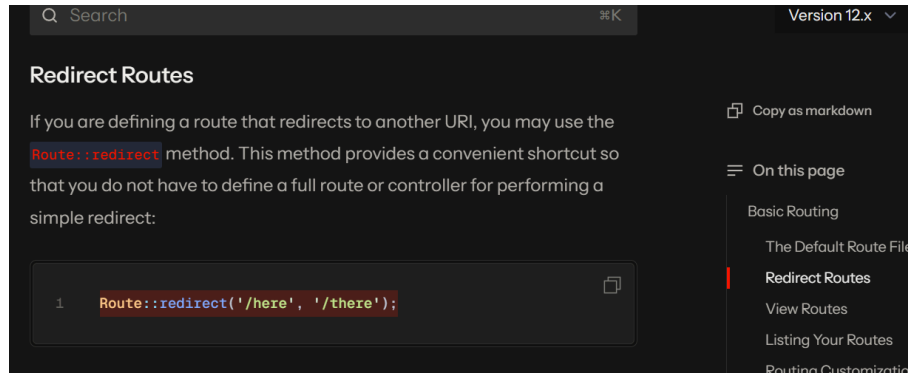

指令

php artisan route:list

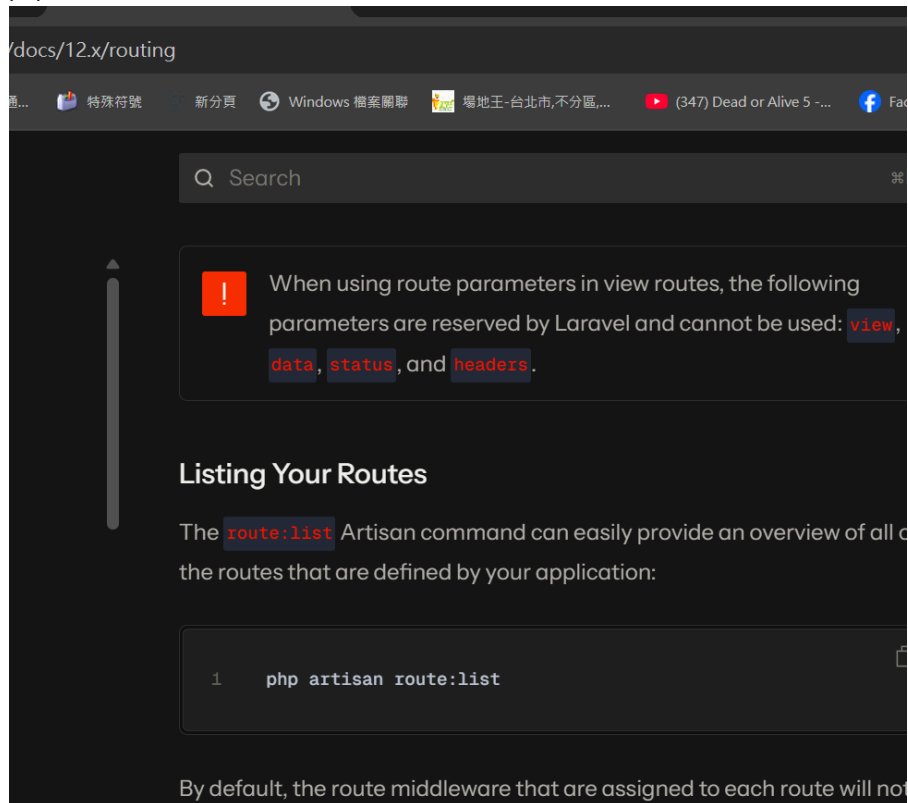


=> Controller

在controller 和 web裡面編輯


php artisan make:controller UserController

php artisan make:controller HotelController.php ~>複製到git bash 中建立新檔案controller

php artisan make:controller HelloController.php

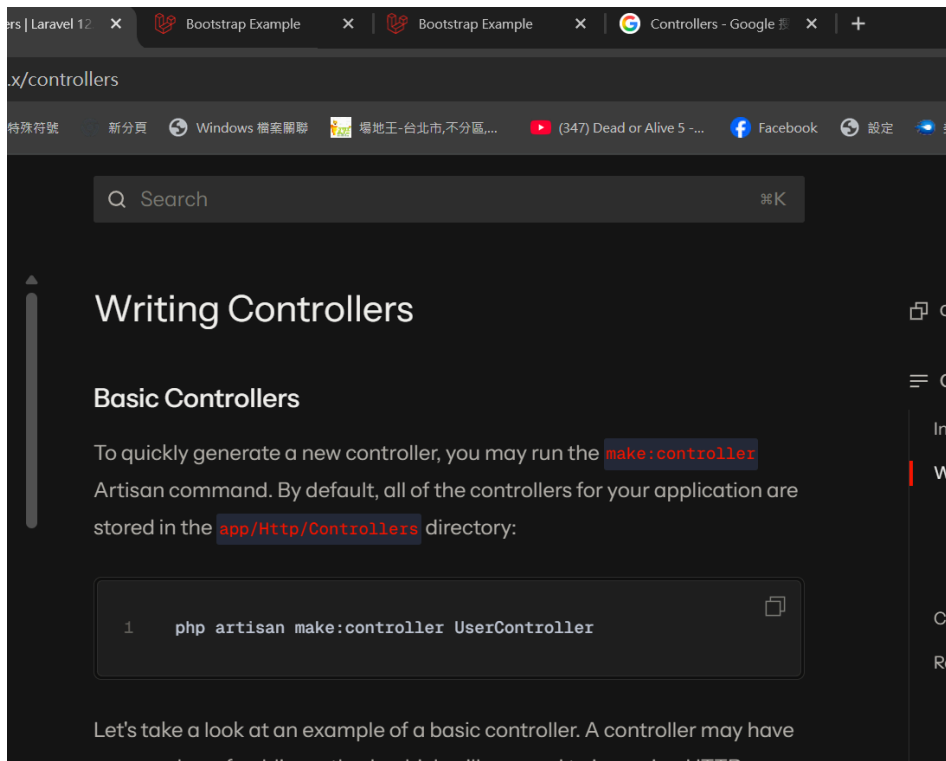

建立成功後面畫

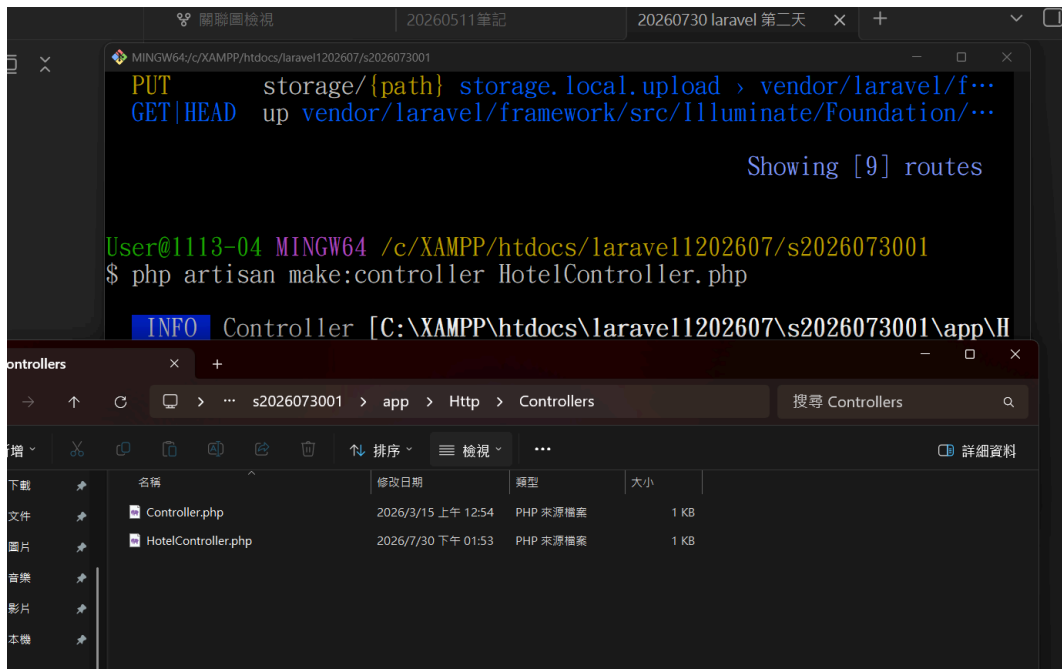

Once you have written a controller class and method, you may define a route to the controller method like so:

```
1 use App\Http\Controllers\UserController;
2
3 Route::get('/user/{id}', [UserController::class, 'show']);
```

When an incoming request matches the specified route URI, the `show`

```
use App\Http\Controllers\UserController;
```

```
use App\Http\Controllers\HotelController; (變更自己要的部分)
```

```
Route::get('/user/{id}', [UserController::class, 'show']);
```

```
Route::get('/user/{id}', [HotelController::class, 'index']); (變更自己要的部分)
```

貼在route~>web 並變更名稱

```
web.php routes 1 X web.php C:\...\985c4f75-e7cb-496b-844f-a385833521b4_s2026073001.zip.1
routes > web.php > ...
1 <?php
2
3 use Illuminate\Support\Facades\Route;
4 use App\Http\Controllers\HotelController;
5
6 // Route::get('/', function () {
7 //     return view('welcome');
8 // });
9 Route::redirect('/', '/hotel');
10
11
12 // hotel controller
13 Route::get('/user/{id}', [HotelController::class, 'index']);
14
15 // hotel
16 Route::get('/hotel', function () {
17     // view folder name
18     // views/hotel/index.blade.php
19     // $url = route('hotel.f1');
20     // dd($url);
```