

project : laravel_20260810

- 1- 安裝
- 2- 設定 xampp
- 3- route
- 4- view
- 5- controller -r
- 6- route - controller - view
- 7- model

- 1- 安裝

composer create-project "laravel/laravel:^10.0" example-app

composer create-project "laravel/laravel:^12.0"

laravel_20260812

git bash

- 2- 設定 xampp

DocumentRoot

"C:/xampp/htdocs/laravel202607/laravel_20260810/public"

<Directory

"C:/xampp/htdocs/laravel202607/laravel_20260810/public">

views/welcome.blade.php

hello 2026-08-10

3- route

```
web.php > Closure
1  <?php
2
3  use Illuminate\Support\Facades\Route;
4
5  // localhost/cars
6  Route::get('/cars', function () {
7      // dd('hello route cars');
8      // return view('welcome');
9      return view('car.index');
10 });
11
```

4- view



The screenshot shows a code editor with a file explorer on the left and a code editor on the right. The file explorer shows the project structure, including the 'views' directory and the 'car' subdirectory. The 'index.blade.php' file is selected. The code editor shows the content of the 'index.blade.php' file, which is '1 hello view car index'.

```
resources > views > car > index.blade.php
1  hello view car index
```

5- controller

php artisan make:controller PhotoController --resource

php artisan make:controller CarController --resource

```
User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_20260812
$ php artisan route:list


GET|HEAD      cars ..... cars.index > CarController@index
POST          cars ..... cars.store > CarController@store
GET|HEAD      cars/create ..... cars.create > CarController@create
GET|HEAD      cars/{car} ..... cars.show > CarController@show
PUT|PATCH    cars/{car} ..... cars.update > CarController@update
DELETE        cars/{car} ..... cars.destroy > CarController@destroy
GET|HEAD      cars/{car}/edit ..... cars.edit > CarController@edit
GET|HEAD      storage/{path} storage.local > vendor/laravel/framework/src/Illum...
PUT           storage/{path} storage.local.upload > vendor/laravel/framework/sr...
GET|HEAD      up vendor/laravel/framework/src/Illuminate/Foundation/Configurati...

Showing [10] routes
```


route link controller

```
use App\Http\Controllers\PhotoController;
Route::resource('photos',
PhotoController::class);
use App\Http\Controllers\CarController;
Route::resource('cars', CarController::class);
```

6- route - controller - view

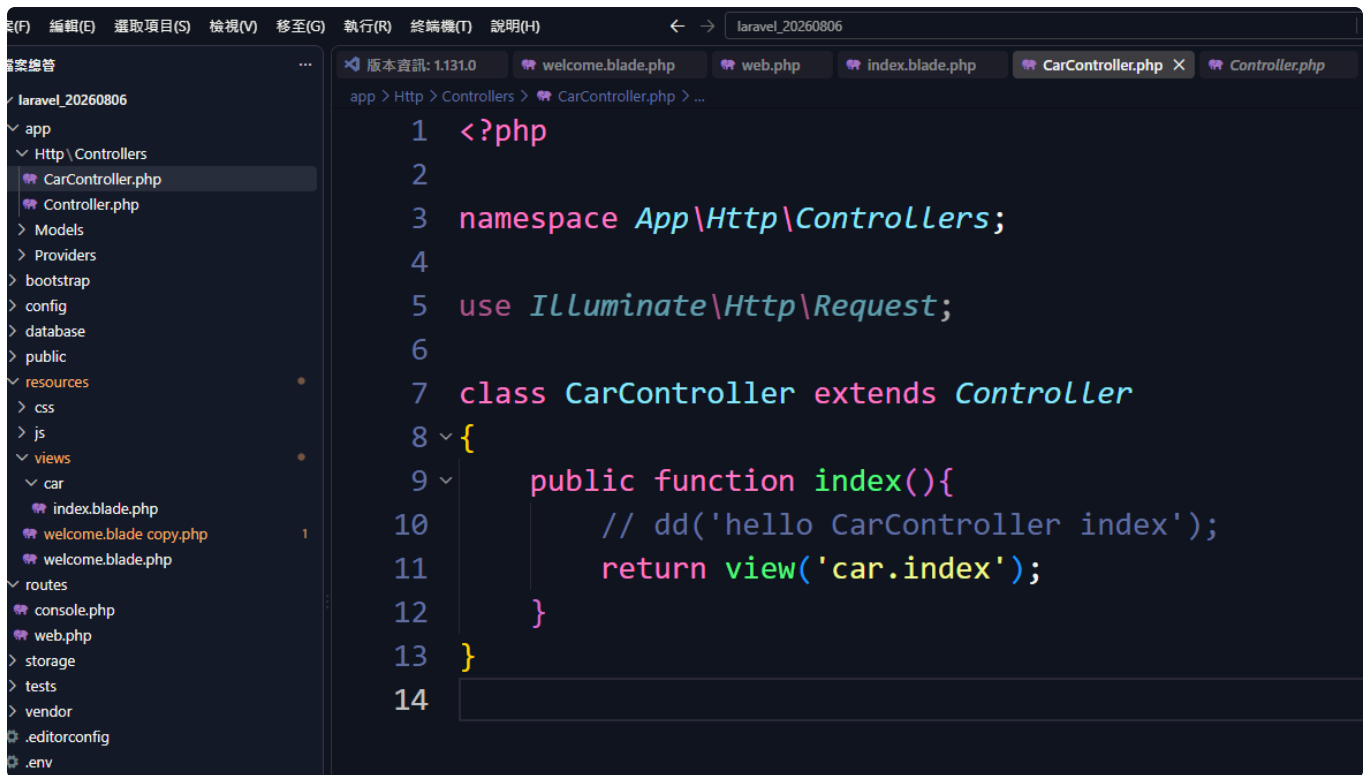

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CarController extends Controller
8 {
9     public function index(){
10         // dd('hello CarController index');
11         return view('car.index');
12     }
13 }
14
```

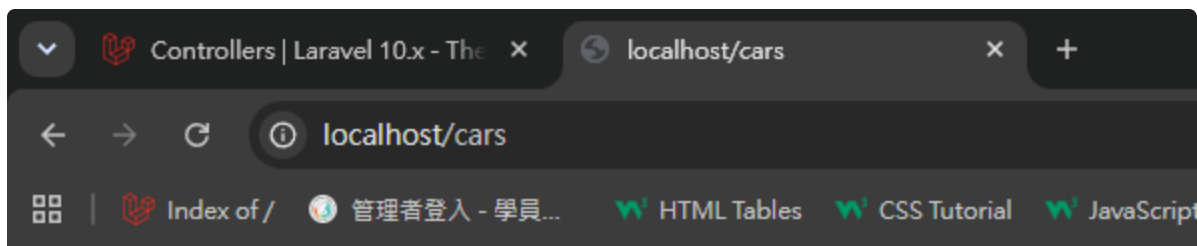

hello view car index

7- model

```
php artisan make:model Flight
php artisan make:model Car
```

8- db

xampp

phpMyAdmin db laravel_20260812

```
.env
DB_CONNECTION=mysql
DB_HOST=127.0.0.1
DB_PORT=3306
DB_DATABASE=laravel_20260812
DB_USERNAME=root
DB_PASSWORD=
```

```
php artisan migrate
```

old

```
2
3 DB_CONNECTION=sqlite
4 DB_HOST=127.0.0.1
5 DB_PORT=3306
6 DB_DATABASE=laravel
7 DB_USERNAME=root
8 DB_PASSWORD=
```

改成以下

```
3 DB_CONNECTION=mysql
4 DB_HOST=127.0.0.1
5 DB_PORT=3306
6 DB_DATABASE=laravel_20260812
7 DB_USERNAME=root
8 DB_PASSWORD=
9
```

```
User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_20260812
$ php artisan make:model Car
```

INFO Model [C:\xampp\htdocs\laravel202607\laravel_20260812\app\Models\Car.php] created successfully.

```
User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_20260812
$ php artisan migrate
```

INFO Preparing database.

Creating migration table 104.20ms **DONE**

INFO Running migrations.

0001_01_01_000000_create_users_table 60.28ms **DONE**
0001_01_01_000001_create_cache_table 20.24ms **DONE**
0001_01_01_000002_create_jobs_table 41.09ms **DONE**

phpMyAdmin

伺服器: 127.0.0.1 > 資料庫: laravel_20260812

結構 SQL 搜尋 查詢 匯出 匯入 操作 權限 預存程序 事件 觸發器 設計器

包含這個字:

資料表	動作	資料列數	類型	編碼與排序	大小	資料分散
☐ cache	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
☐ cache_locks	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
☐ failed_jobs	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
☐ jobs	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
☐ job_batches	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	16.0 KB	-
☐ migrations	★ 瀏覽 結構 搜尋 新增 清空 刪除	3	InnoDB	utf8mb4_unicode_ci	16.0 KB	-
☐ password_reset_tokens	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	16.0 KB	-
☐ sessions	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	48.0 KB	-
☐ users	★ 瀏覽 結構 搜尋 新增 清空 刪除	0	InnoDB	utf8mb4_unicode_ci	32.0 KB	-
9 張資料表 總計		3	InnoDB	utf8mb4_unicode_ci	256.0 KB	0 B

↑ ☐ 全選 已選擇項目:

列印 資料字典

Create new table

資料表名稱 欄位數

mysql 4 建立

git clone

https://github.com/chengkk0910/laravel_20260812.git

laravel_s20260812

-1 git clone <專案網址>

-2 cd <專案目錄>

-3 composer install

-4 cp .env.example .env

-5 php artisan key:generate

-6 (手動設定 .env 資料庫連線資訊)

-7 php artisan migrate

-8 xampp

-9 資料庫是否有資料 要匯入

-8 migration

(migrate / migration) 動詞 / 名詞

php artisan migrate 幫我執行migrate動作 run migration

建立名單(名詞) 執行(動作)

php artisan make:migration create_flights_table

php artisan make:migration create_cars_table

php artisan migrate


php artisan migrate:rollback

database 內的資料表 複數

一般存摺 記錄 金錢紀錄

migration 記錄 db

目前任務 使用migration migrate 產生 db table cars

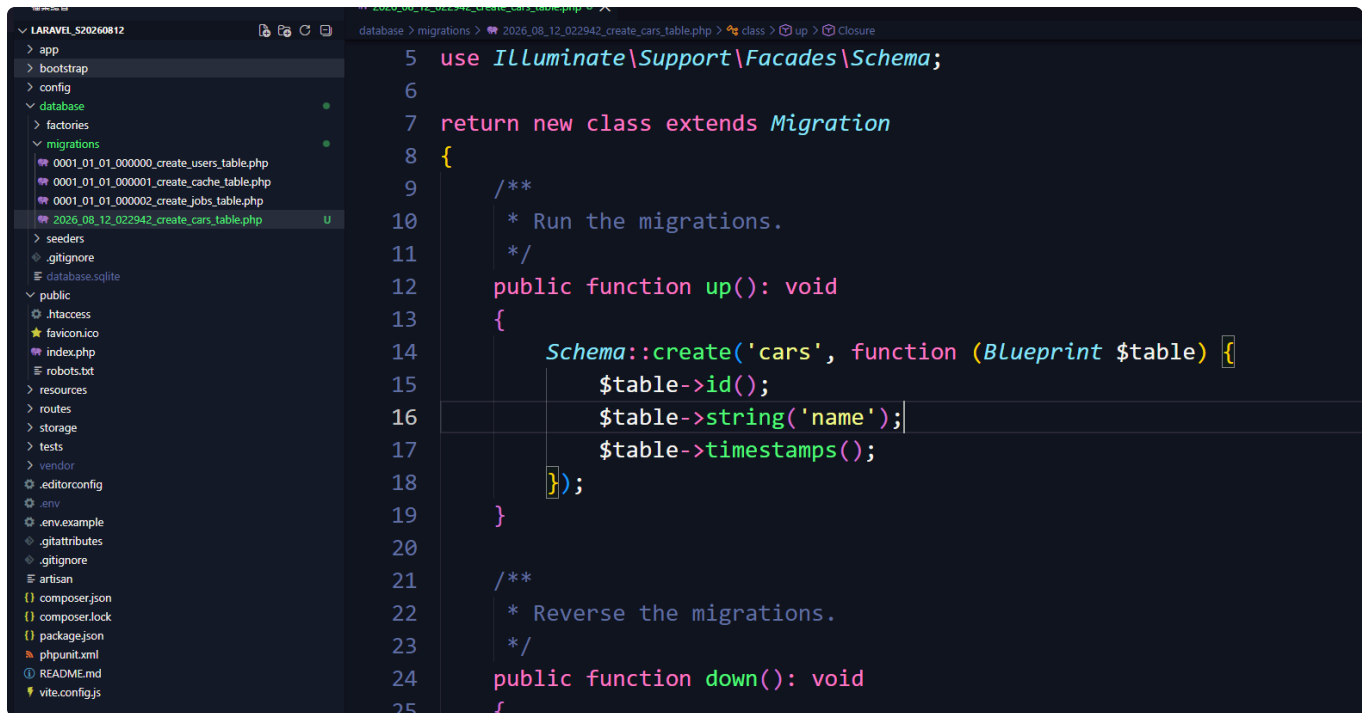

The screenshot shows a code editor with a file explorer on the left and a code editor on the right. The file explorer shows the project structure for 'LARAVEL_S20260812', with the 'migrations' folder expanded. The file '2026_08_12_022942_create_cars_table.php' is selected. The code editor shows the following PHP code:

```
5 use Illuminate\Support\Facades\Schema;
6
7 return new class extends Migration
8 {
9     /**
10      * Run the migrations.
11      */
12     public function up(): void
13     {
14         Schema::create('cars', function (Blueprint $table) {
15             $table->id();
16             $table->string('name');
17             $table->timestamps();
18         });
19     }
20
21     /**
22      * Reverse the migrations.
23      */
24     public function down(): void
25     {
```


```
User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_s20260812 (main)
$ php artisan migrate

INFO Running migrations.

2026_08_12_022942_create_cars_table ..... 4.21ms DONE

User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_s20260812 (main)
$ php artisan migrate

INFO Nothing to migrate.
```

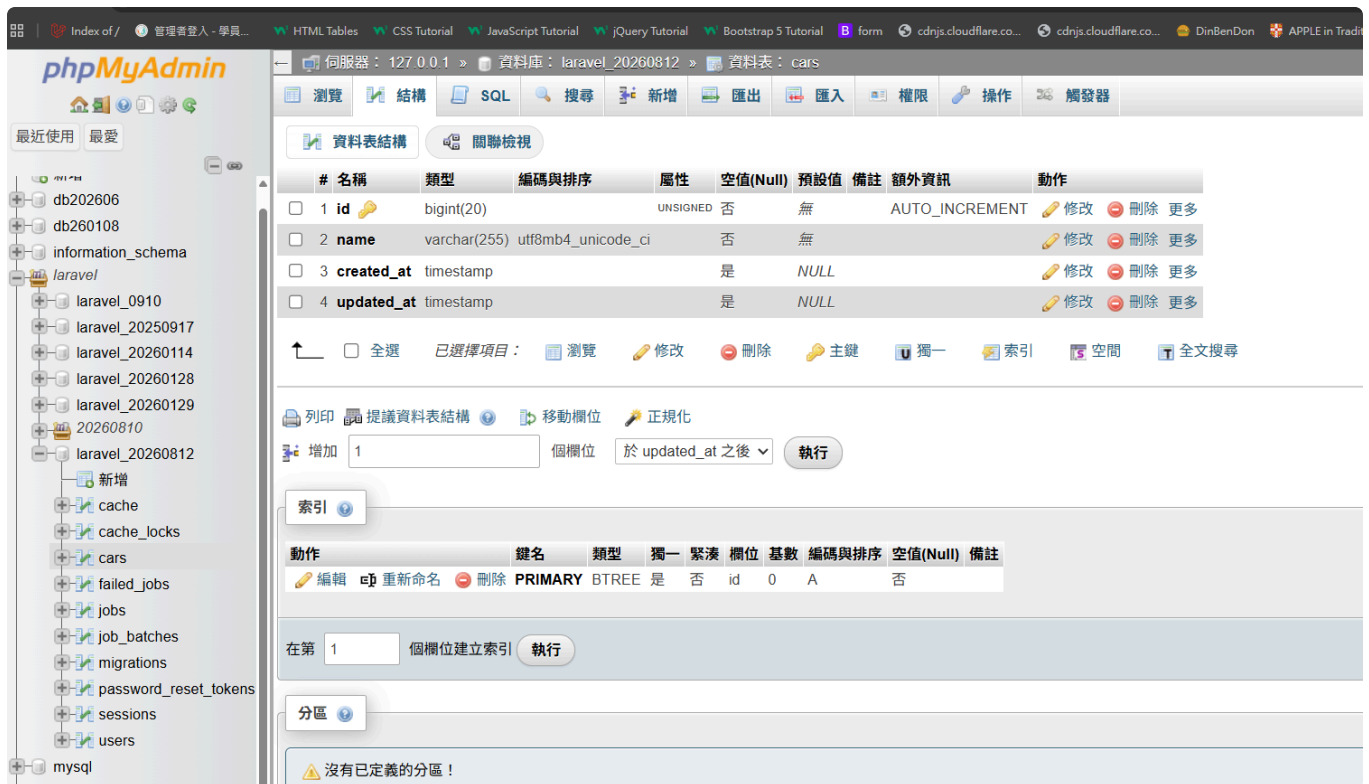資料庫 table column type

- 1.文字 varchar
- 2.數字 int
- 3.日期 datetime

名稱	類型	長度/值	預設值
	INT		無
	VARCHAR		無
	INT		無
	DATETIME		無

資料表備註：

編碼與排序：

1. 三大核心型態對照表

MySQL 資料型態	Laravel Migration 語法	常用修飾詞鏈結	適用情境範例
INT	<code>\$table->integer('column_name')</code>	<code>->unsigned()</code> <code>->default(0)</code>	瀏覽次數、數碼、年齡
VARCHAR	<code>\$table->string('column_name', 255)</code>	<code>->nullable()</code> <code>->unique()</code>	姓名、Email、電話、密碼 H
DATETIME	<code>\$table->dateTime('column_name')</code>	<code>->nullable()</code> <code>->useCurrent()</code>	發布時間、活結束時間、預

...

```
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;
```

```
return new class extends Migration
{
    public function up(): void
    {
        Schema::create('articles', function
(Blueprint $table) {
            // 自動遞增主鍵
            $table->id();

            // VARCHAR 範例
            $table->string('title', 150);
```

```
// VARCHAR(150) - 文章標題
$table->string('author_email')-
>nullable(); // VARCHAR(255) - 作者 Email
(可為空)

// INT 範例
$table->integer('views_count')-
>default(0); // INT - 點閱率 (預設 0)
$table->integer('status')-
>default(1); // INT - 文章狀態 (1: 草
稿, 2: 發布)

// DATETIME 範例
$table->dateTime('published_at')-
>nullable(); // DATETIME - 預定發布時間 (可為
空)

// 自動產生 created_at 與 updated_at
時間戳記
$table->timestamps();
});
}

public function down(): void
{
    Schema::dropIfExists('articles');
}
```

```
};
```

資料column 三件套

```
$table->string('name', 150)->default('');  
$table->integer('age')->default(0);  
$table->dateTime('date')->default('2020-01-01');
```

The screenshot shows the Laravel documentation website. The left sidebar contains a navigation menu with categories like Security, Database, Eloquent ORM, and API Documentation. The main content area is titled 'Available Column Types' and explains that the schema builder blueprint offers various methods for adding columns to database tables. It lists several column types categorized into Boolean, String & Text, and Numeric types. The right sidebar shows a table of contents for the current page, with 'Creating Columns' and 'Available Column Types' highlighted.

Laravel Search 🔍 Version 12.x

Available Column Types

The schema builder blueprint offers a variety of methods that correspond to the different types of columns you can add to your database tables. Each of the available methods are listed in the table below:

Boolean Types

- [boolean](#)

String & Text Types


char	mediumText	text
longText	string	tinyText

Numeric Types

bigIncrements	integer	unsignedBigInteger
bigInteger	mediumIncrements	unsignedInteger
decimal	mediumInteger	unsignedMediumInteger
double	smallIncrements	unsignedSmallInteger
float	smallInteger	unsignedTinyInteger
id	tinyIncrements	
increments	tinyInteger	

On this page:

- Introduction
- Generating Migrations
 - Squashing Migrations
- Migration Structure
- Running Migrations
 - Rolling Back Migrations
- Tables
 - Creating Tables
 - Updating Tables
 - Renaming / Dropping Tables
- Columns
 - Creating Columns**
 - Available Column Types
 - Column Modifiers
 - Modifying Columns
 - Renaming Columns
 - Dropping Columns

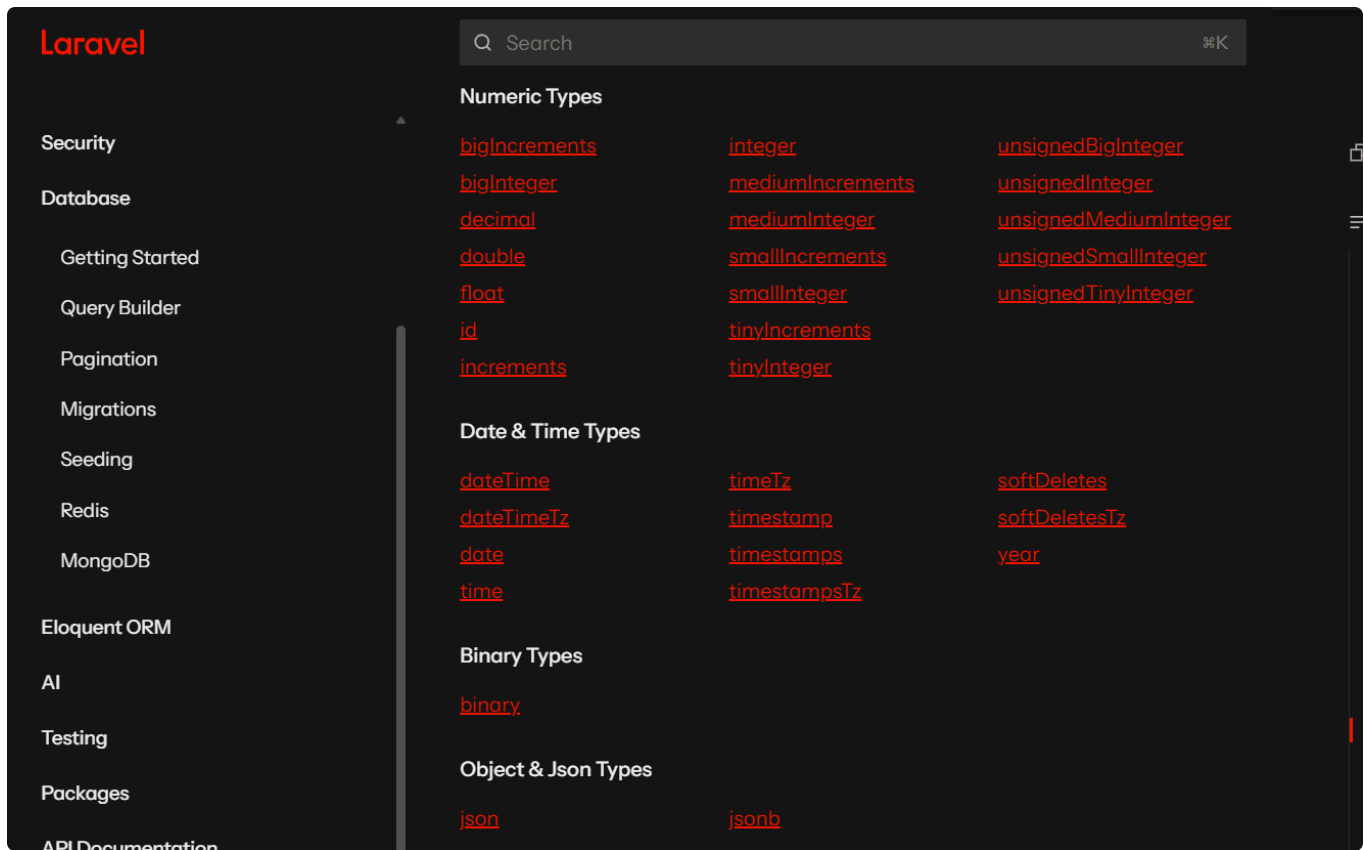

php artisan migrate

run up()

```
public function up(): void Pin selection to current chat p
{
    Schema::create('cars', function (Blueprint $table) {
        $table->id();
        $table->string('name');
        $table->string('mobile');
        // $table->string('name', 150)->default('');
        $table->integer('age')->default(0);
        $table->dateTime('date')->default('2020-01-01');
        $table->timestamps();
    });
}
```

php artisan migrate:rollback

```

/**
 * Reverse the migrations.
 */
public function down(): void
{
    Schema::dropIfExists('cars');
}

```

php artisan make:model Flight --migration

php artisan make:model Dog --migration

php artisan make:model Dog -mcr

php artisan make:model Cat -mcr

-m migration

-c controller

-r controller resource

model

```

User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/laravel_s20260812 (main)
$ php artisan make:model Cat -mcr

[INFO] Model [C:\xampp\htdocs\laravel202607\laravel_s20260812\app\Models\Cat.php] created successfully.

[INFO] Migration [C:\xampp\htdocs\laravel202607\laravel_s20260812\database\Migrations\2026_08_12_052622_create_cats_table.php] created successfully.

[INFO] Controller [C:\xampp\htdocs\laravel202607\laravel_s20260812\app\Http\Controllers\CatController.php] created successfully.

```

/cats

CatController

/views/cat/index.blade.php

Cat.php

/cats

```
2026_08_12_022942_create_cars_table.php 2026_08_12_052259_create_dogs_table.php 2026_08_12_053724_create_cats_table.php
routes > web.php
1 <?php
2
3 use Illuminate\Support\Facades\Route;
4 use App\Http\Controllers\CarController;
5
6 Route::resource('cats', CarController::class);
7 Route::resource('cars', CarController::class);
8
9 // Route::get('/', function () {
10 //     return view('welcome');
11 // });
```

CatController

migration

```
11 */
12 public function up(): void
13 {
14     Schema::create('cats', function (Blueprint $table) {
15         $table->id();
16         $table->string('name')->default('')->nullable();
17         $table->timestamps();
18     });
19 }
20
21 /**
22  * Reverse the migrations.
23  */
24 public function down(): void
```

```
User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_s20260812 (main)
$ php artisan migrate

INFO Running migrations.

2026_08_12_053724_create_cats_table ..... 5.98ms DONE

User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/laravel_s20260812 (main)
$
```

Controller 內 使用model

Retrieving Single Models / Aggregates

In addition to retrieving all of the records matching a given query, you may also retrieve single records using the `find`, `first`, or `firstWhere` methods. Instead of returning a collection of models, these methods return a single model instance:

```
1 use App\Models\Flight;
2
3 // Retrieve a model by its primary key...
4 $flight = Flight::find(1);
5
6 // Retrieve the first model matching the query constraints...
7 $flight = Flight::where('active', 1)→first();
8
9 // Alternative to retrieving the first model matching the query constraints...
10 $flight = Flight::firstWhere('active', 1);
```

```
use App\Models\Flight;
```

```
// 接收多筆data
```

```
$flight = Flight::get();
```

```
$flight = Flight::all();
```

```
foreach (Flight::all() as $flight) {
    echo $flight→name;
}
```



```
//接收單筆
// Retrieve a model by its primary key...
$flight = Flight::find(1);

// Retrieve the first model matching the query
constraints...
$flight = Flight::where('active', 1)->first();

// Alternative to retrieving the first model
matching the query constraints...
$flight = Flight::firstWhere('active', 1);
```

419 error

create to store form

```
<div class="container mt-3">
  <h2>Cat Create form 新增</h2>
  <form action="{{route('cats.store')}}" method="POST">
    @csrf
    <div class="mb-3 mt-3">
      <label for="name">Name:</label>
      <input type="name" class="form-control" id="name" placeholder="Enter N
    </div>
    <button type="submit" class="btn btn-primary">Submit</button>
  </form>
</div>
```

```
<form action="http://localhost/cats" method="POST" == $0
  <input type="hidden" name="_token" value="suJPzX8WyeV771UfknF05QqUnW8ebzPu8VA
X9WdZ" autocomplete="off">
  <div class="mb-3 mt-3">...</div>
  <button type="submit" class="btn btn-primary">Submit</button>
```

```
public function store(Request $request)
{
    // $input = $request->all();
    $input = $request->except('_token');
    // dd($input);
    // dd($input['name']);
    $data = new Cat;

    $data->name = $input['name'];

    $data->save();

    return redirect()->route('cats.index');
    // dd('CatController store');
}
```