

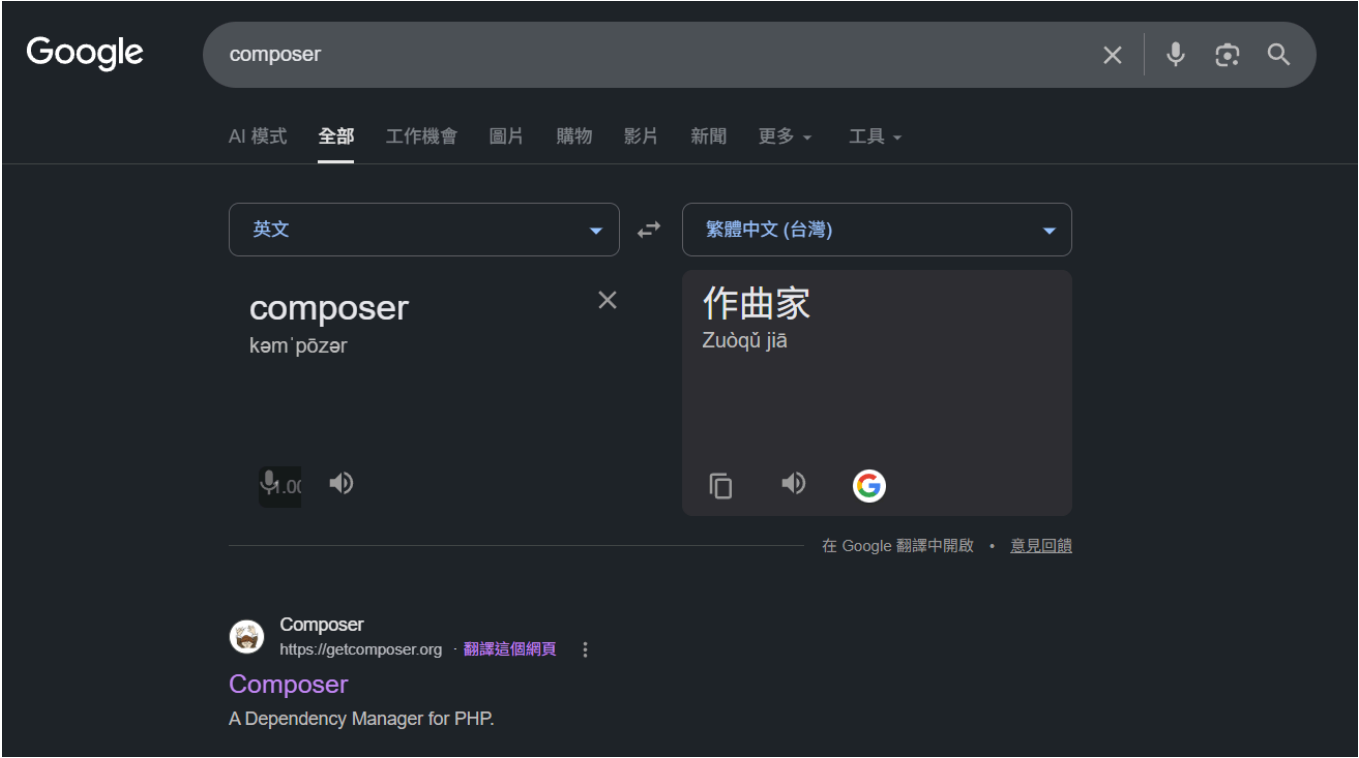



larave.com 國外版本的 最新
laravel.tw 國內 不要 版本到5.3

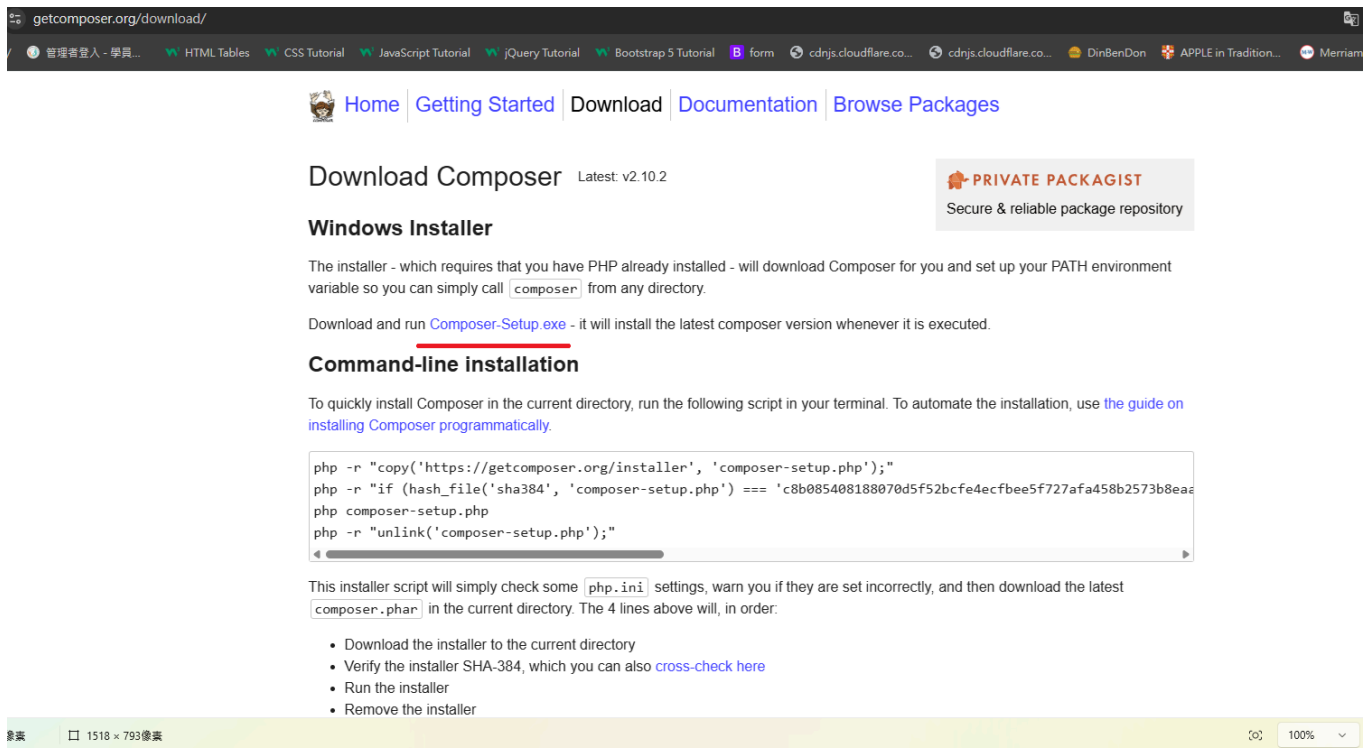

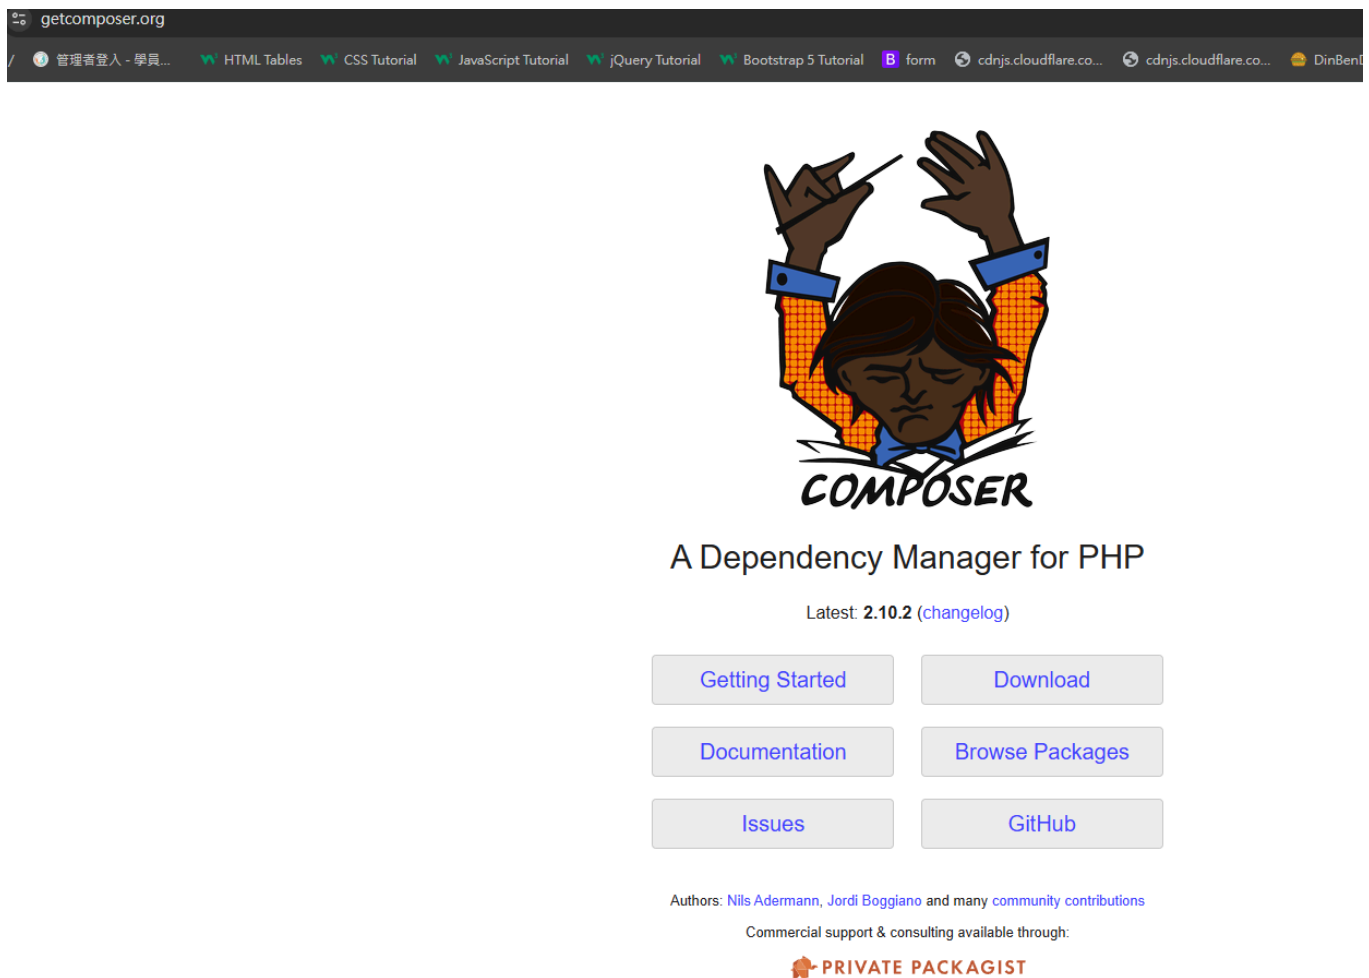

git bash 如果沒有 要先去裝git
composer

```
r@1113-Teacher MINGW64 ~  
composer
```

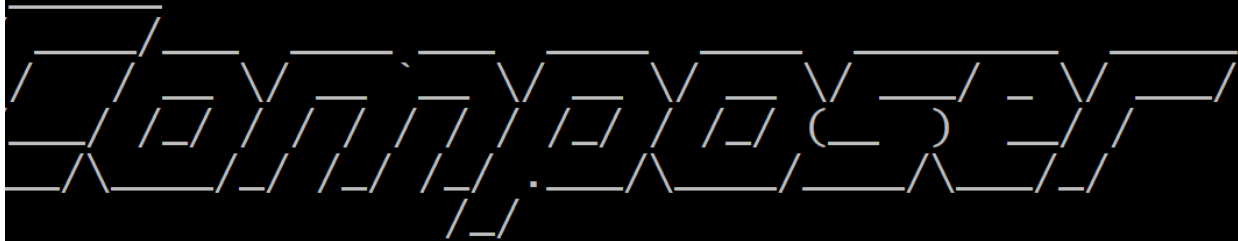

```
poser version 2.10.2 2026-07-01 11:24:45
```

```
ge:  
ommand [options] [arguments]
```

composer global require laravel/installer

composer create-project "laravel/laravel:^10.0" example-app

composer create-project "laravel/laravel:^12.0" example-app

composer create-project "laravel/laravel:^12.0" test0729

composer create-project "laravel/laravel:^12.0"


s2026072901-init

composer global require laravel/installer test072902 版本用最新 跟目前xampp 有衝突

8.3 以上 才能使用13

composer create-project "laravel/laravel:^12.0"

test072902

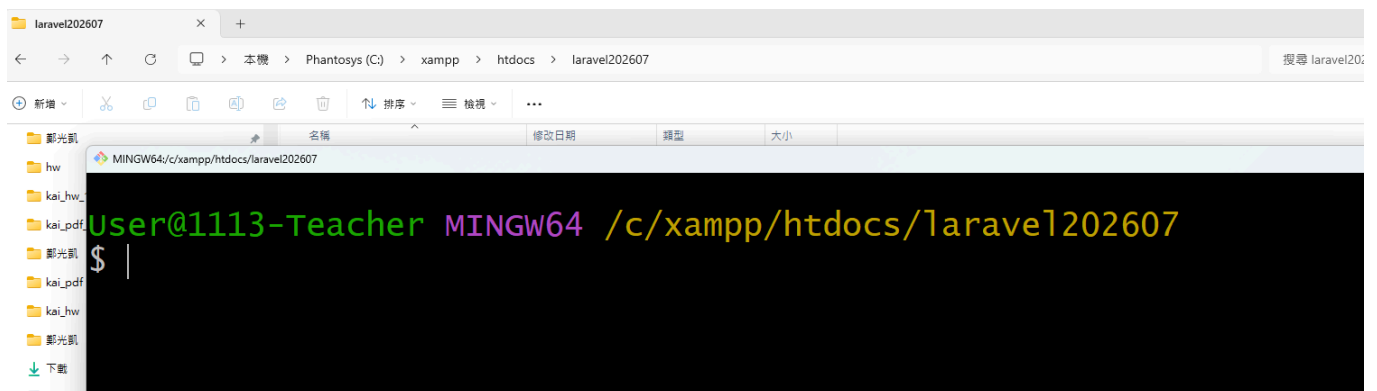

```
no security vulnerability advisories found.
> @php artisan key:generate --ansi

  INFO  Application key set successfully.

> @php -r "file_exists('database/database.sqlite') || touch('database/database.sqlite');"
> @php artisan migrate --graceful --ansi

  INFO  Preparing database.

Creating migration table .....

  INFO  Running migrations.

0001_01_01_000000_create_users_table .....
0001_01_01_000001_create_cache_table .....
0001_01_01_000002_create_jobs_table .....

User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607
$ |
```

cd example-app

php artisan serve

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607
$ cd example-app

User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/example-app
$ |
```

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607
$ cd example-app

User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/example-ap
$ php artisan serve

[INFO] Server running on [http://127.0.0.1:8000].

Press Ctrl+C to stop the server

2026-07-29 09:27:33 / .....
2026-07-29 09:27:33 /favicon.ico .....
2026-07-29 09:27:33 .....


```

Once the project has been created, start Laravel's local development server using Laravel Artisan's `serve` command:

```
1 cd example-app
2
3 php artisan serve
```

Once you have started the Artisan development server, your application will be accessible in your web browser at `http://localhost:8000`. Next, you're ready to [start taking your next steps into the Laravel ecosystem](#). Of course, you may also want to [configure a database](#).

ctrl + 滑鼠左鍵

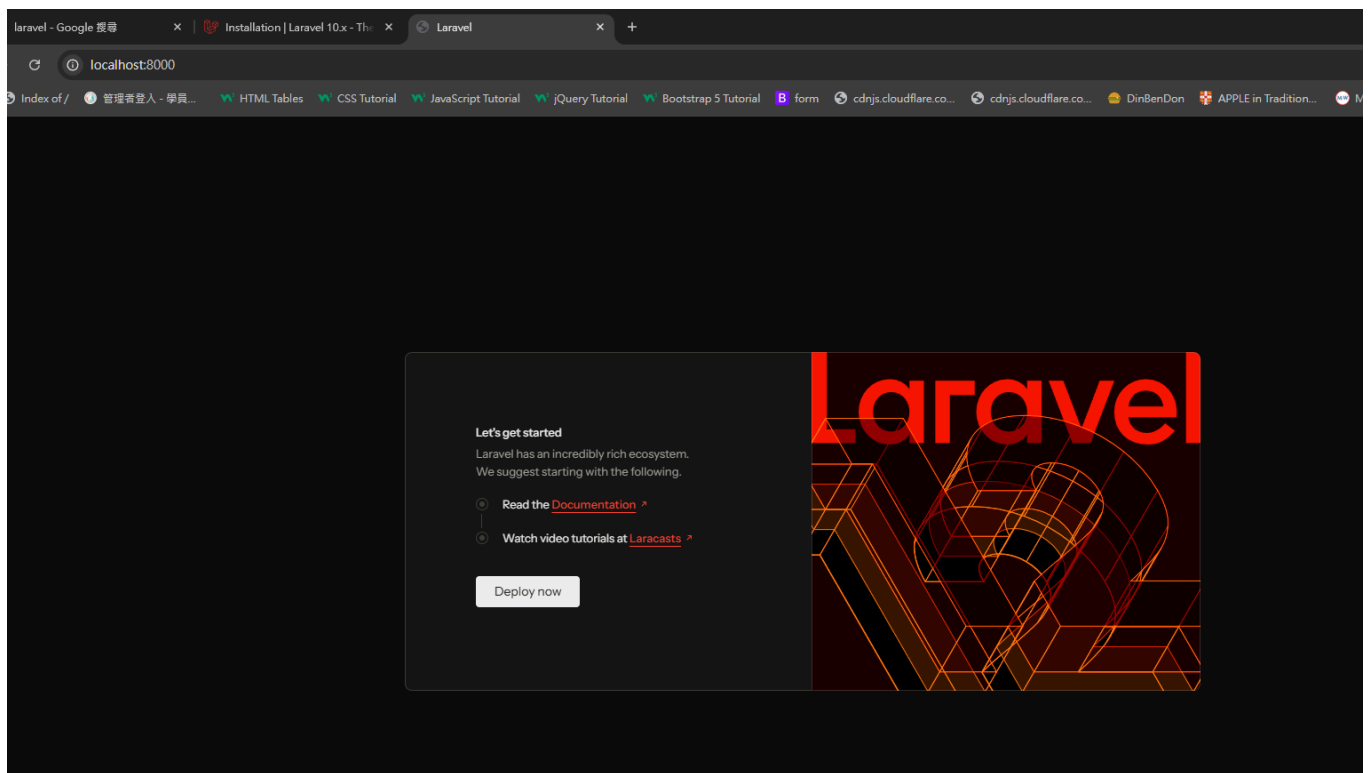

php artisan serve 類似xampp run

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/example-app
$ php artisan serve


INFO Server running on [http://127.0.0.1:8000].

Press Ctrl+C to stop the server

2026-07-29 09:27:33 / .....
2026-07-29 09:27:33 /favicon.ico .....
2026-07-29 09:27:33 / .....
2026-07-29 10:13:57 / .....
2026-07-29 10:13:57 /favicon.ico .....

User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel202607/example-app
$
```

ctrl + c 中斷 停止

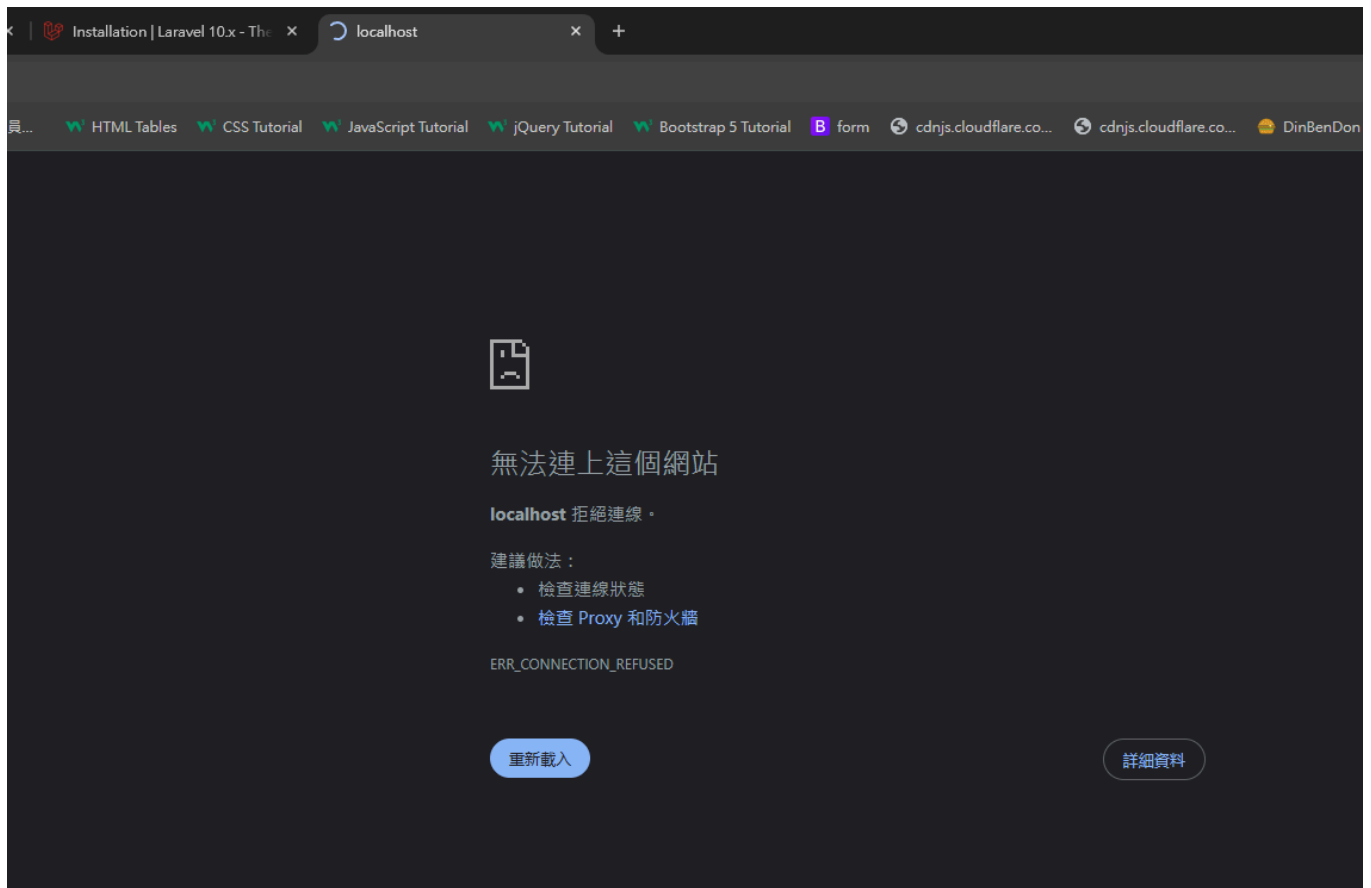

ctrl + l 清除畫面

cd .. 回到上一層

cd 目錄 進入下一層目錄

history 歷史的指令

ls 當層目錄列表


```



294 git log
295 git init
296 git init
297 composer
298 composer
299 composer create-project "laravel/laravel:^12.0" example-app
300 cd example-app
301 php artisan serve
302 php artisan serve
303 cd example-app
304 cd ..
305 cd example-app
306 php artisan serve
307 cd ..
308 composer create-project "laravel/laravel:^12.0" test0729
309 ls
310 cd test0729/
311 php artisan serve
312 php artisan
313 history
314 history


```

ser@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel202607/test0729



composer create-project "laravel/laravel:^12.0"
s2026072901-init

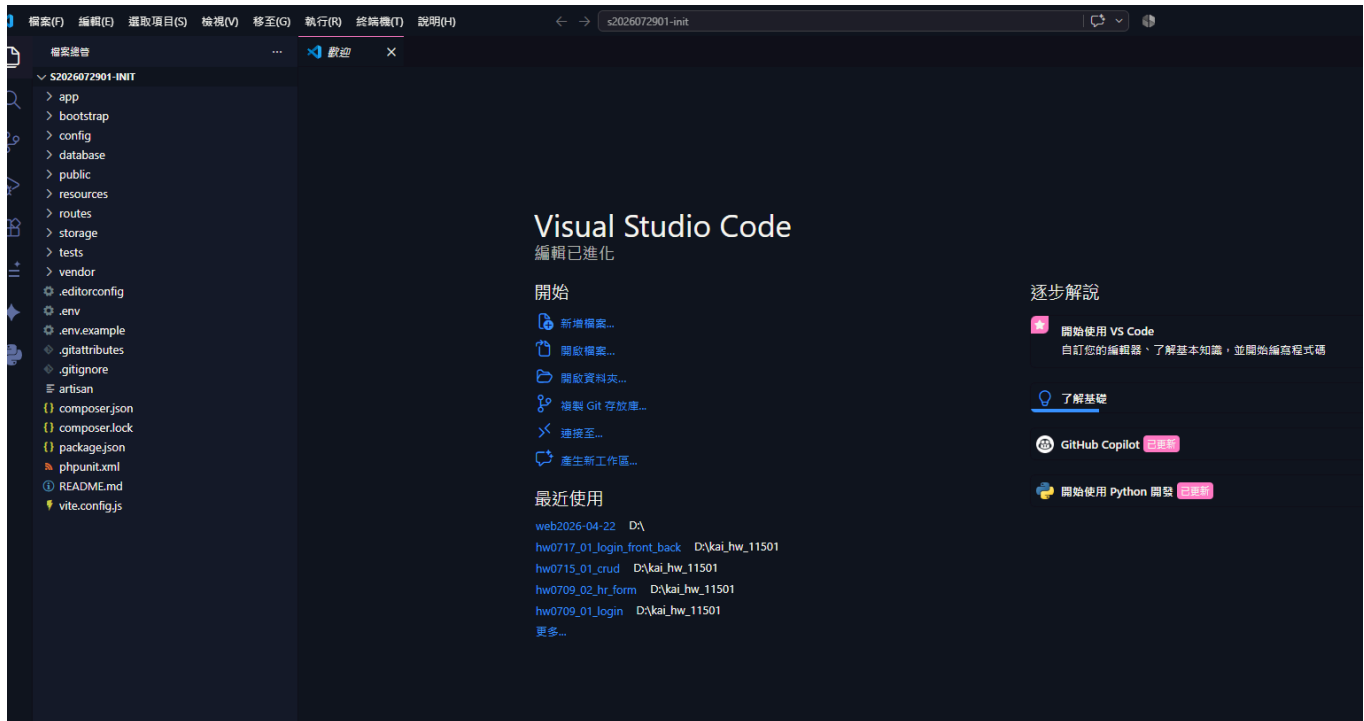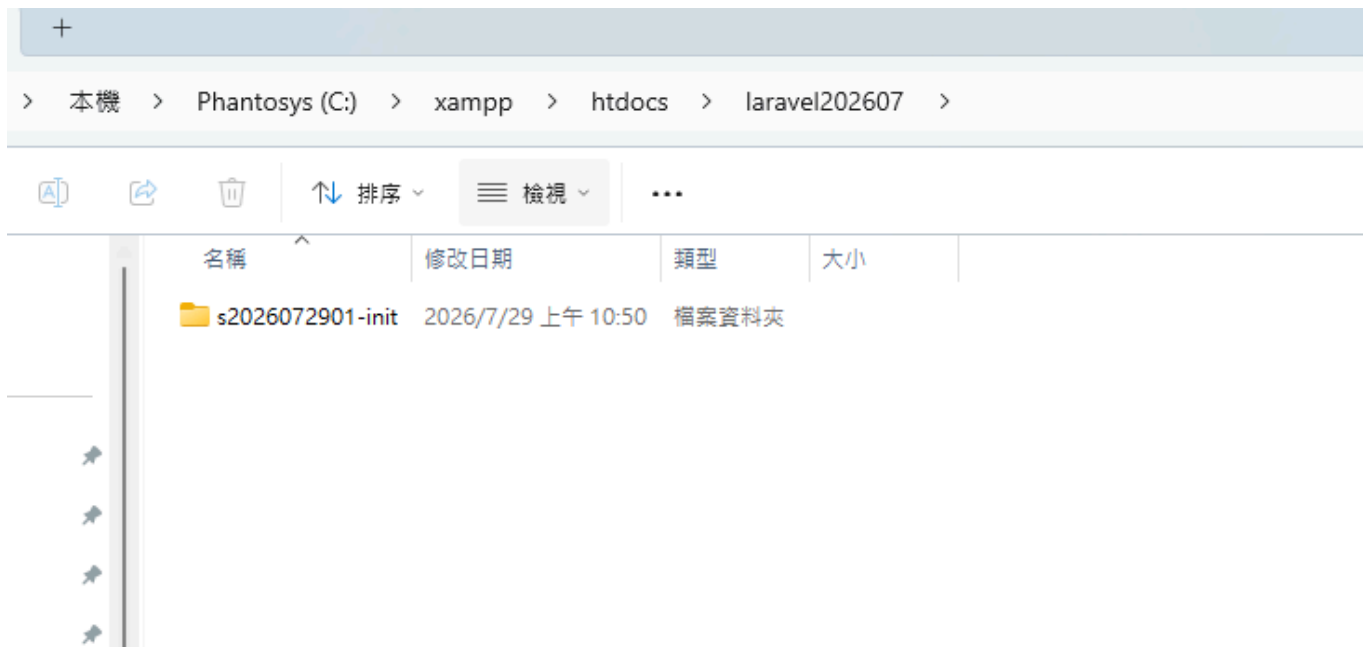

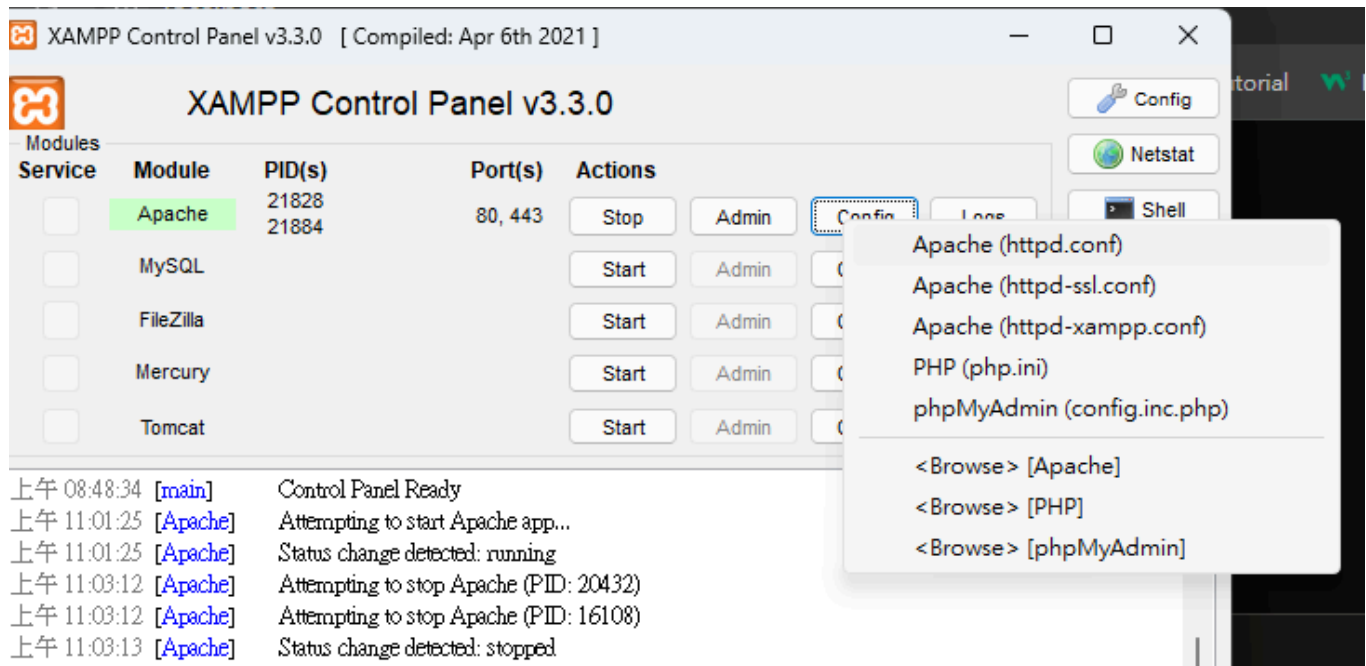

DocumentRoot


"C:/xampp/htdocs/laravel202607/s2026072901-init/public"

<Directory

"C:/xampp/htdocs/laravel202607/s2026072901-init/public">

設計原理

1. Convention over Configuration 慣例優於設定
2. Don't Repeat Yourself 不要重複造輪子

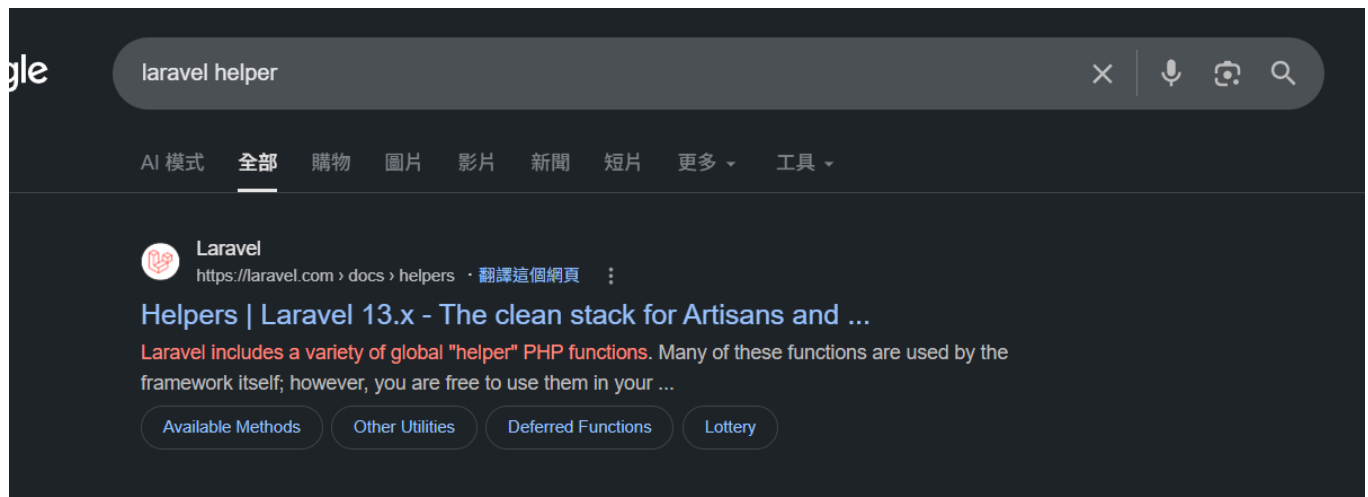

明天 laravel

1.route \$data

2.前端views

\$data 放到bs5 table