

Class 16 Graph


Shawn Xiao (A18276668)

```
library(ggplot2)
```

```
results <- read.table("my_results_1.tsv",  
                      sep="\t",  
                      header = F,  
                      stringsAsFactors = F)
```

```
colnames(results) <- c("qseqid", "sseqid", "pident", "length", "mismatch", "gapopen", "qstar"
```

```
ggplot(results)+  
  aes(pident, bitscore) +  
  geom_point(alpha=0.1)
```

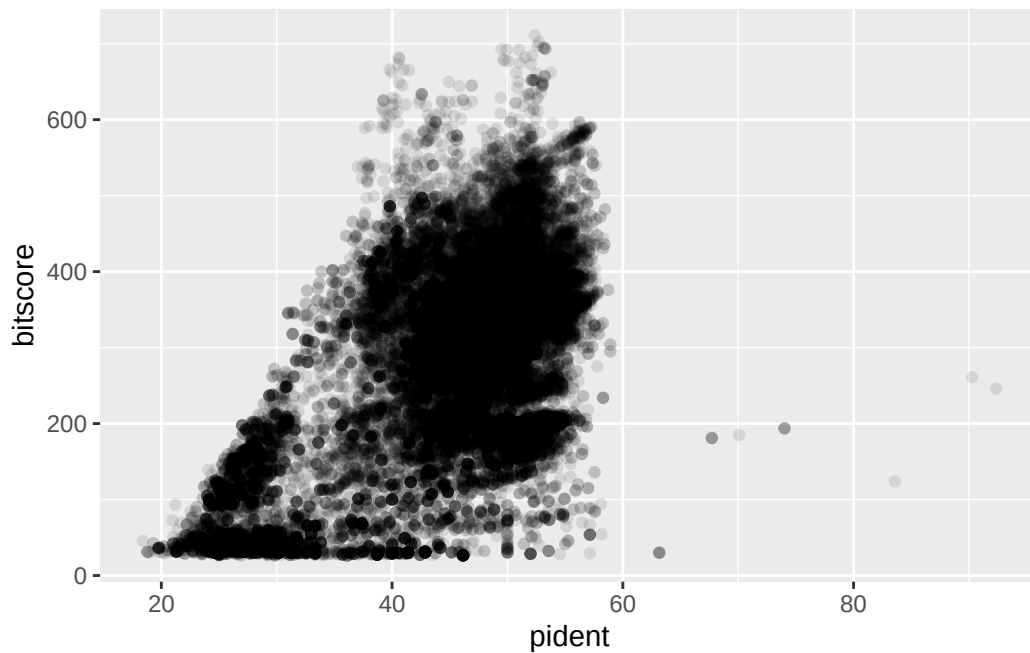

```
ggplot(results)+  
  aes((results$pident * (results$qend - results$qstart)),  
      bitscore) +  
  geom_point(alpha=0.1) +  
  geom_smooth()
```

Warning: Use of `results\$pident` is discouraged.
i Use `pident` instead.

Warning: Use of `results\$qend` is discouraged.
i Use `qend` instead.

Warning: Use of `results\$qstart` is discouraged.
i Use `qstart` instead.

Warning: Use of `results\$pident` is discouraged.
i Use `pident` instead.

Warning: Use of `results\$qend` is discouraged.
i Use `qend` instead.

Warning: Use of `results\$qstart` is discouraged.
i Use `qstart` instead.

`geom\_smooth()` using method = 'gam' and formula = 'y ~ s(x, bs = "cs")'

