

# Contents

<b>1</b>	<b>Sorting with One Tasklet</b>	<b>2</b>
1.1	InsertionSort . . . . .	2
1.2	ShellSort . . . . .	2
<b>2</b>	<b>References</b>	<b>6</b>


## Todo list

Architektur	1
Speicherzugriffe (memcpy, mram_read ...)	1
triple buffer	1
Beleg?	2
auf Kompilat eingehen?	2
ex- und implizite Wächterwerte benennen	2
auf Compilersperenzchen eingehen?	2
QuickSort mit Zufallspivot auch noch einbauen	5
verschiedene Verteilungen	5

## Architektur

Speicherzugriffe (memcpy, mram\_read ...)

triple buffer

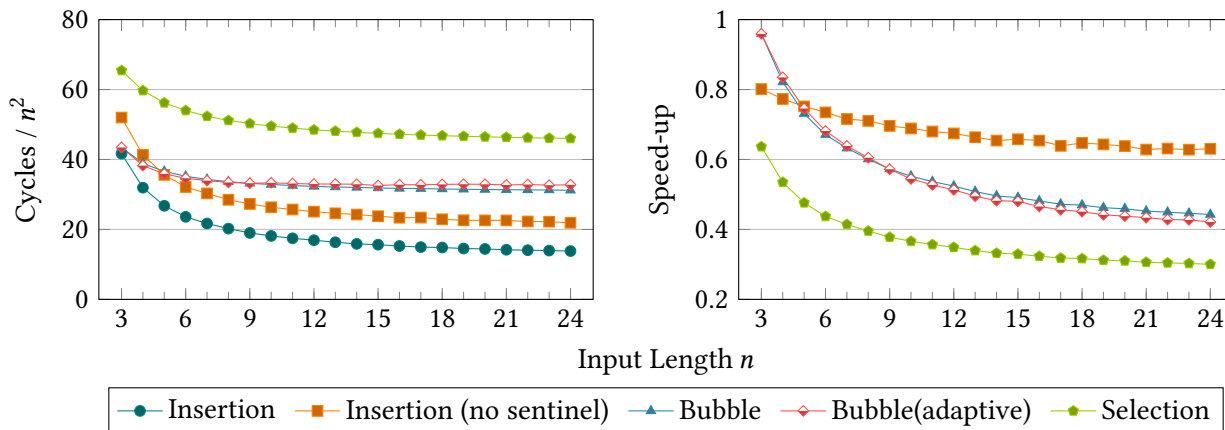

**Figure 1:** Comparison of sorting algorithms with  $O(n^2)$  runtime on a uniform input distribution. The InsertionSorts differ in whether they rely on sentinel values. The adaptive BubbleSort terminates prematurely if no changes were made to the input array during an iteration. The speed-ups are with respect to the InsertionSort relying on sentinel values.

## 1 Sorting with One Tasklet

### 1.1 InsertionSort

This stable sorting algorithm works by moving the  $i$ th element to the left as long as its left neighbour is bigger, assuming that the elements  $0$  to  $i - 1$  are already sorted. Even though in both the average case and the worst case, InsertionSort has a runtime of  $O(n^2)$ , it features quite some advantages: 1. It works in-place, needing only  $O(1)$  additional space. 2. It is inherently adaptive: If the input array is mostly or even fully sorted, the runtime drops down to  $O(n)$ . 3. Its program code is short, lending itself to inlining. 4. The overhead is small. Especially the last two points make InsertionSort a good base algorithm for asymptotically better sorting algorithms to use on very small subarrays.

Beleg?

When moving an element to the left, two checks are needed: Does the left neighbour exist and is it smaller than the element to move? The first check can be omitted through the use of *sentinel values*: If the element at index  $-1$  is at least as small as any value in the input array, the leftwards motion stops there at the latest. Since a DPU has no branch predictor, the slowdown from performing twice as many checks as needed is quite high and lies between 20% and 40% in the relevant input range (Fig. 1). Hence, 'InsertionSort' refers to the version relying on sentinel values henceforth.


auf Compilersperenzchen eingehen?

auf Kom-  
ex- und  
implizite  
Wächter-  
werte ben-  
ennen

**Note.** Other known simple sorting algorithm with similar runtime complexity are SelectionSort and BubbleSort. The asymptoticity, however, hides much higher constant factors such that even for as little as three elements InsertionSort is superior (Fig. 1) and should always be preferred.

### 1.2 ShellSort

InsertionSort suffers from small elements at the end of the input array, since those have to be brought to the front through  $O(n)$  comparisons and swaps. ShellSort, proposed by Donald L. Shell in 1959 [3], remedies this by doing multiple passes of InsertionSort with different step sizes: In round  $r$  with step size  $h_r$ , the input array is divided into the subarrays of indices  $(i, h_r + i, 2h_r + i, \dots)$  for  $i = 0, \dots, h_r - 1$  which then get sorted individually through InsertionSort. The step size

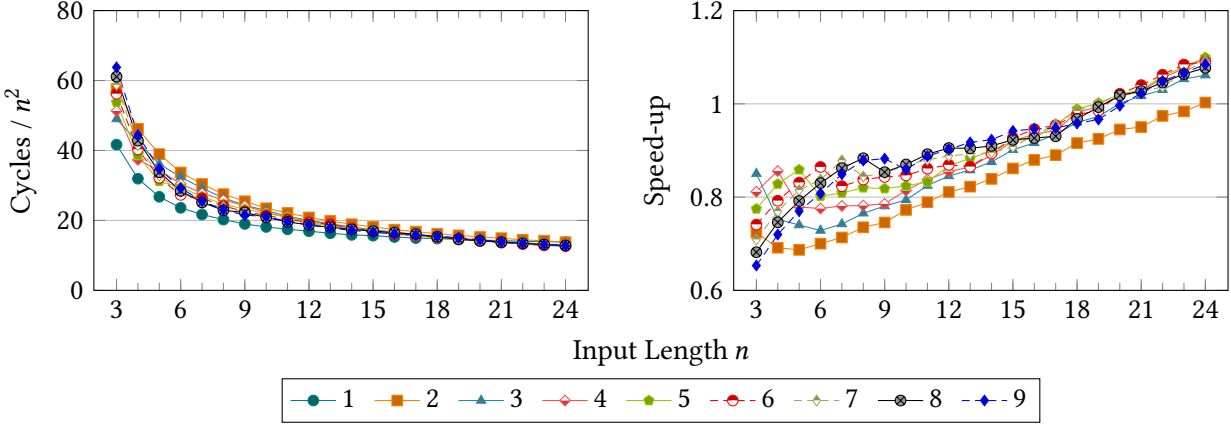


**Figure 2:** Comparison of InsertionSort (1) and various ShellSorts (2–9) on a uniform input distribution. Each ShellSort does one InsertionSort pass with a step size between 2 and 9 before doing a pass of regular InsertionSort. The speed-ups are with respect to the InsertionSort.

get smaller each round, with the final step size being 1 such that a regular InsertionSort is performed. Intuitively, the individual InsertionSorts are fast since elements which need to travel long distances already did big jumps. Finding the right balance between the heightened overhead through multiple InsertionSort passes and the shortened runtime of each InsertionSort pass is subject to research to this day [2, 4] and depends on the cost of the operations (comparing, swapping, looping).


Let us first focus on small input arrays where only two rounds with step sizes  $h_1$  and 1 suffice. The previous results on InsertionSort suggest that ShellSort should make use of  $h_1$  sentinel values lest bounds checking eats any gain up. Figure 2 shows that the additional rounds starts to pay off at around 20 elements for  $h_1 \geq 3$ . Bear in mind that these measurements were conducted on a uniform input distribution; if ShellSort is used by another algorithm on a subarray, these thresholds may be higher or even non-existent due to some degree of presorting.

When moving to greater input lengths (Fig. 3), the differences in performance between the two-round ShellSorts become more pronounced; especially the ones with  $h_1 = 3$  and  $h_1 = 4$  fall off whereas the one with  $h_1 = 6$  holds its ground quite well. With more than 64 elements, three round get worthwhile to consider. Interestingly, many ShellSorts with  $h_2 = 4$  take the lead whilst the ones with  $h_2 = 6$  are mid-table. This is in accordance with Ciura [1] who noted  $h = (17, 4, 1)$  to be the optimal triplet for 128 elements. It is noteworthy, though, that he measured the quadruplet  $h = (38, 9, 4, 1)$  to be about 5% faster in the MIX machine model. On a DPU, this sequence leads to a runtime of nearly exactly 74.000 cycles, placing it only mid-table. Without access to Ciura’s original code, giving a satisfactory explanation for the discrepancy is hard, however.

But would pushing the limits of ShellSort even be rewarding? Two issues come up. Firstly, greater input lengths require greater steps — well into the three digits for  $n \approx 1000$  [1, 4] — and those in turn require more sentinel values. But the more sentinel values are stored, the less space is available for the actual input array, leading to smaller runs and thus hurting the overall sorting algorithm. Explorative testing suggests that falling back to bounds checking for big steps is too punishing. Secondly, there simply are better alternatives, namely QuickSort (which will be discussed in more detail in the next section). Figure 4 shows that even though ShellSort takes just a fraction of the time InsertionSort takes — apparently achieving a runtime between  $\Omega(n \lg n)$  and  $O(n \lg^2 n)$  —, QuickSort beats both from 20 elements onwards. Even QuickSort’s standard deviation of 2237 cycles is superior to ShellSort’s 2670 cycles (for 128 elements). Consequently,

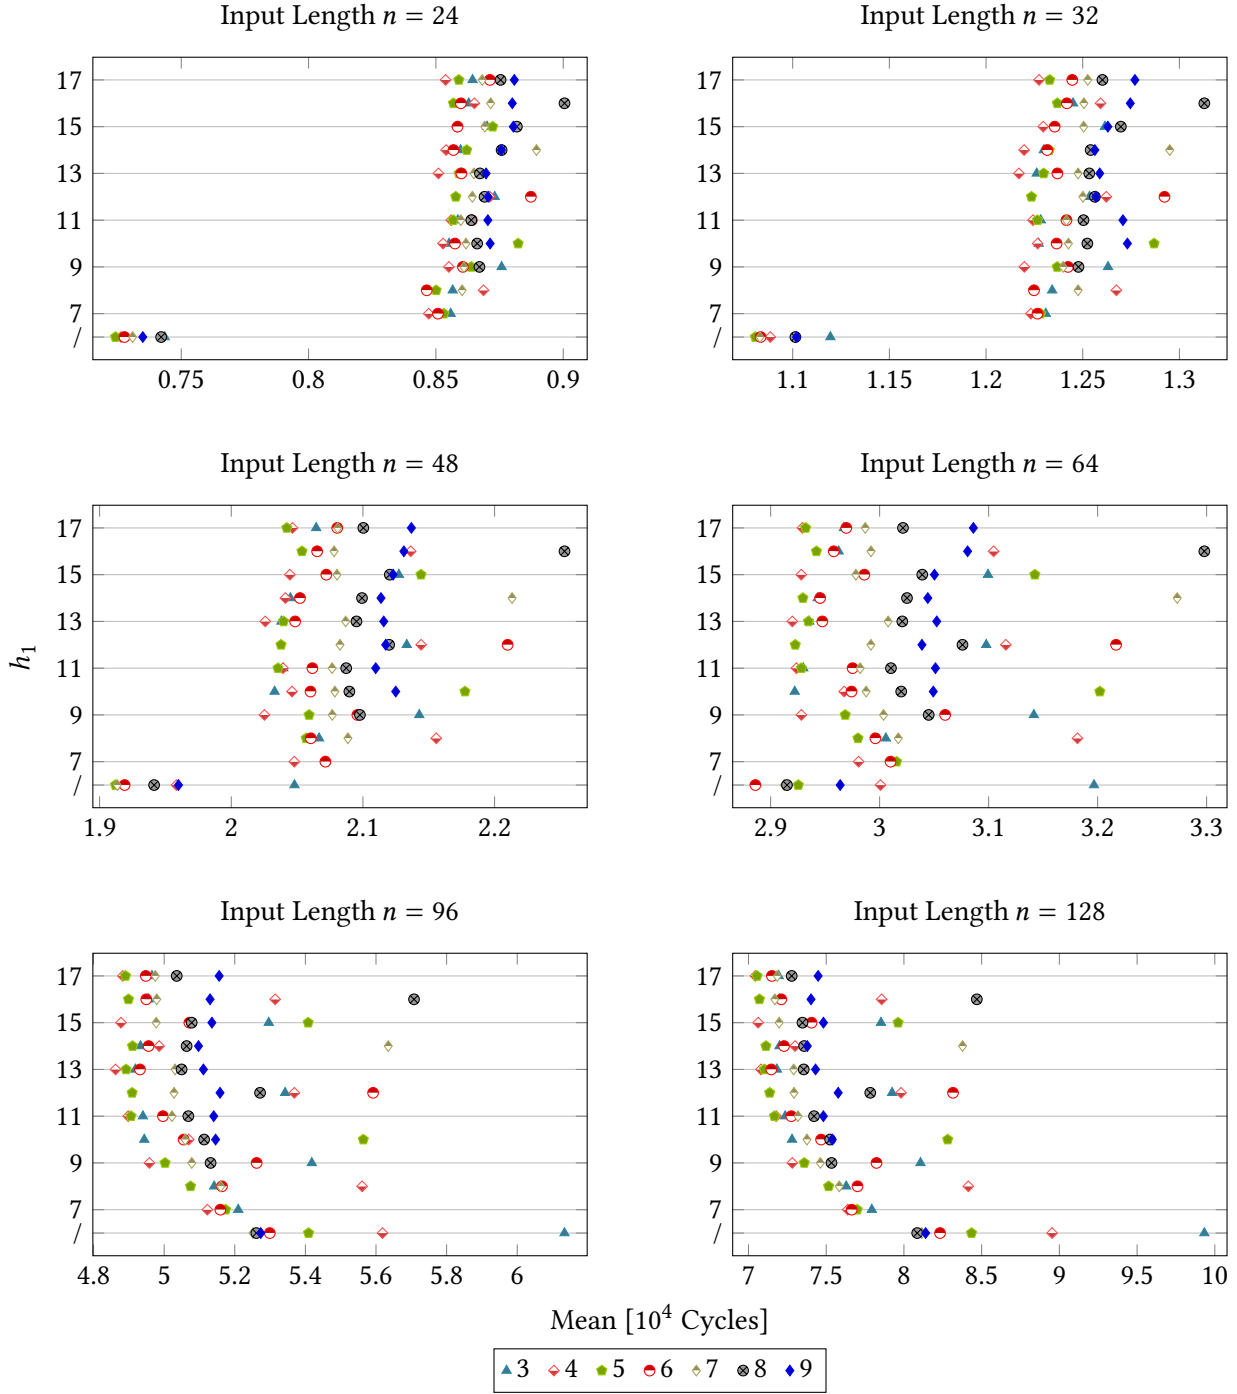

**Figure 3:** Runtimes of ShellSorts with two rounds (/) and three rounds (7–17) on a uniform input distribution. The coloured symbols encode the step size  $h_1$  for two-round ShellSorts and the step size  $h_2$  for three-round ShellSorts. For the latter, the step size  $h_1$  is noted on the y-axes.

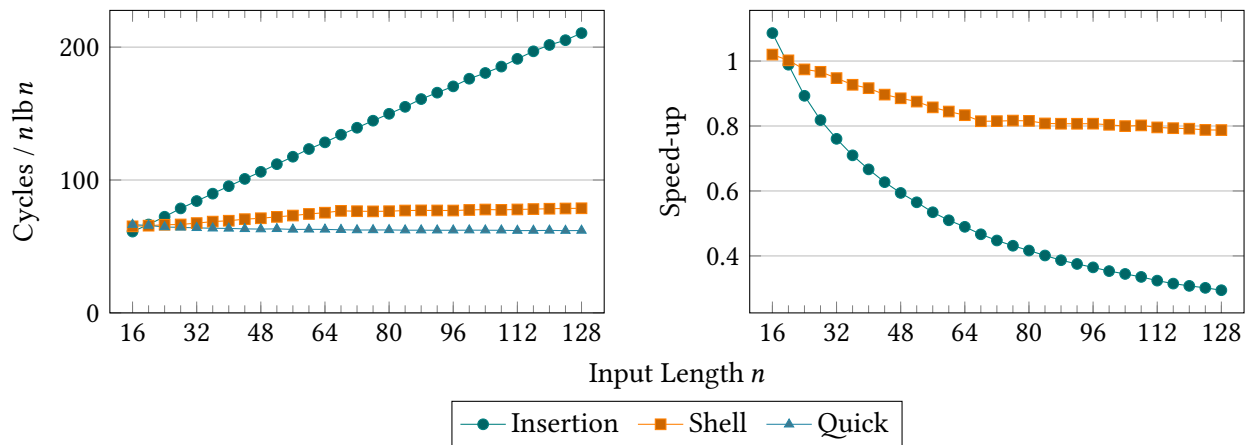

**Figure 4:** Comparison of InsertionSort, ShellSort and an optimised QuickSort on a uniform input distribution. The ShellSort uses the steps sizes  $h = (6, 1)$  for  $n \leq 64$  and  $h = (17, 4, 1)$  otherwise. The speed-ups are with respect to the QuickSort.

QuickSort mit Zufallspivot auch noch einbauen

verschiedene Verteilungen

ShellSort will not be improved upon in this thesis.

## 2 References

- [1] Marcin Ciura. ‘Best Increments for the Average Case of Shellsort’. In: *Fundamentals of Computation Theory*. Ed. by Rūsiņš Freivalds. Berlin, Heidelberg: Springer Berlin Heidelberg, pp. 106–117. DOI: [10.1007/3-540-44669-9\\_12](https://doi.org/10.1007/3-540-44669-9_12). URL: <https://web.archive.org/web/20180923235211/http://sun.aei.polsl.pl/~mciura/publikacje/shellsort.pdf> (visited on 24/05/2024).
- [2] Ying Wai Lee. *Empirically Improved Tokuda Gap Sequence in Shellsort*. 21st Dec. 2021. arXiv: [2112.11112](https://arxiv.org/abs/2112.11112) [cs.DS].
- [3] Donald L. Shell. ‘A high-speed sorting procedure’. In: *Commun. ACM* 2 (1959), pp. 30–32. URL: <https://api.semanticscholar.org/CorpusID:28572656>.
- [4] Oscar Skean, Richard Ehrenborg and Jerzy W. Jaromczyk. *Optimization Perspectives on Shellsort*. 2023. arXiv: [2301.00316](https://arxiv.org/abs/2301.00316) [cs.DS].

**r0** start  
**r1** end  
**r23** return address

insertion\_sort\_nosentinel:

```

    jleu r0, r1, .LBB2_1 // Continue if array of positive length ...
.LBB2_8:
    jump r23 // ... else leave the function.
.LBB2_1:
    move r2, r0, true, .LBB2_2 // i ← start; Jump to beginning of outer loop.
.LBB2_5:
    move r4, r5 // ?
.LBB2_7:
    add r2, r2, 4 // i++
    sw r4, 0, r3 // *curr ← to_sort
    jgtu r2, r1, .LBB2_8 // If i > end, terminate.
.LBB2_2: // Beginning of outer loop.
    lw r3, r2, 0 // to_sort ← *i;
    add r5, r2, -4 // prev ← i - 1
    move r4, r2 // curr ← i
    jltu r5, r0, .LBB2_7 // If prev < start, skip to the next iteration of the outer loop.
    move r5, r2 // (prev + 1) ← i
.LBB2_4:
    lw r6, r5, -4 // *prev
    jleu r6, r3, .LBB2_5 // If *prev > to_sort, terminate inner loop.
    add r4, r5, -4 // Store prev.
    add r7, r5, -8 // Store prev--.
    sw r5, 0, r6 // *curr ← *prev
    move r5, r4 // curr ← prev
    jgeu r7, r0, .LBB2_4 // If prev ≥ start, continue with the next iteration of the inner loop.
    jump .LBB2_7 // Continue with the next iteration of the outer loop.

```

insertion\_sort\_sentinel:

```

    jleu r0, r1, .LBB3_1 // Continue if array of positive length ...
.LBB3_5:
    jump r23 // ... else leave the function.
.LBB3_4:
    add r0, r0, 4 // i++
    sw r3, 0, r2 // *curr ← to_sort
    jgtu r0, r1, .LBB3_5 // If i > end, leave the function.
.LBB3_1:
    lw r2, r0, 0 // to_sort ← *i
    lw r4, r0, -4 // *prev
    move r3, r0 // curr ← i
    jleu r4, r2, .LBB3_4 // If *prev > to_sort, terminate inner loop.
    move r3, r0 // ???
.LBB3_3:
    sw r3, 0, r4 // *curr ← *prev
    lw r4, r3, -8 // *(prev - 1)
    add r3, r3, -4 // curr ← prev

```

```
jgtu r4, r2, .LBB3_3 // If *(prev - 1) > to_sort, continue with the next iteration of the
jump .LBB3_4 // Leave inner loop.
```