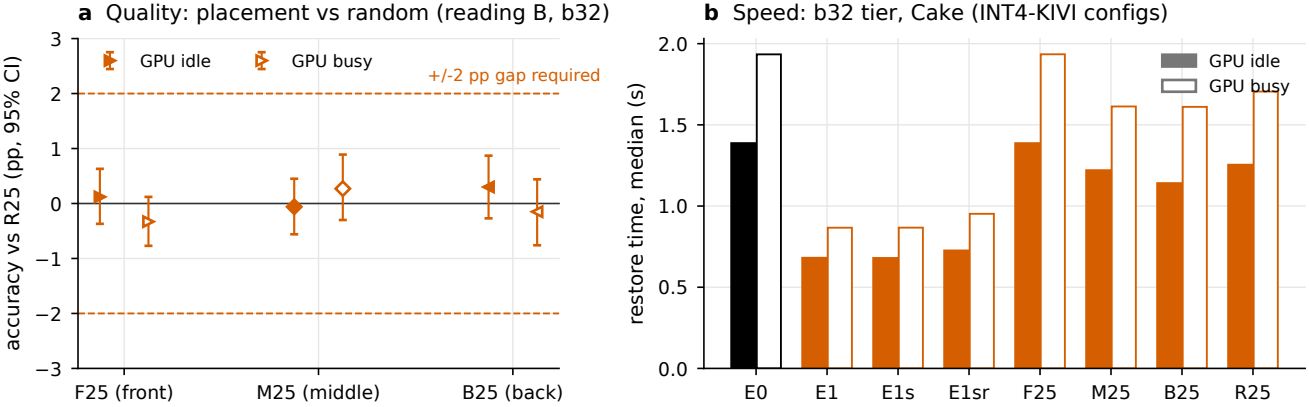
a Quality: placement vs random (reading B, b32)
GPU idle
GPU busy
+/-2 pp gap required
accuracy vs R25 (pp, 95% CI)
3
2
1
0
−1
−2
−3
F25 (front)
M25 (middle)
B25 (back)
b Speed: b32 tier, Cake (INT4-KIVI configs)
GPU idle
GPU busy
restore time, median (s)
2.0
1.5
1.0
0.5
0.0
E0
E1
E1s
E1sr
F25
M25
B25
R25