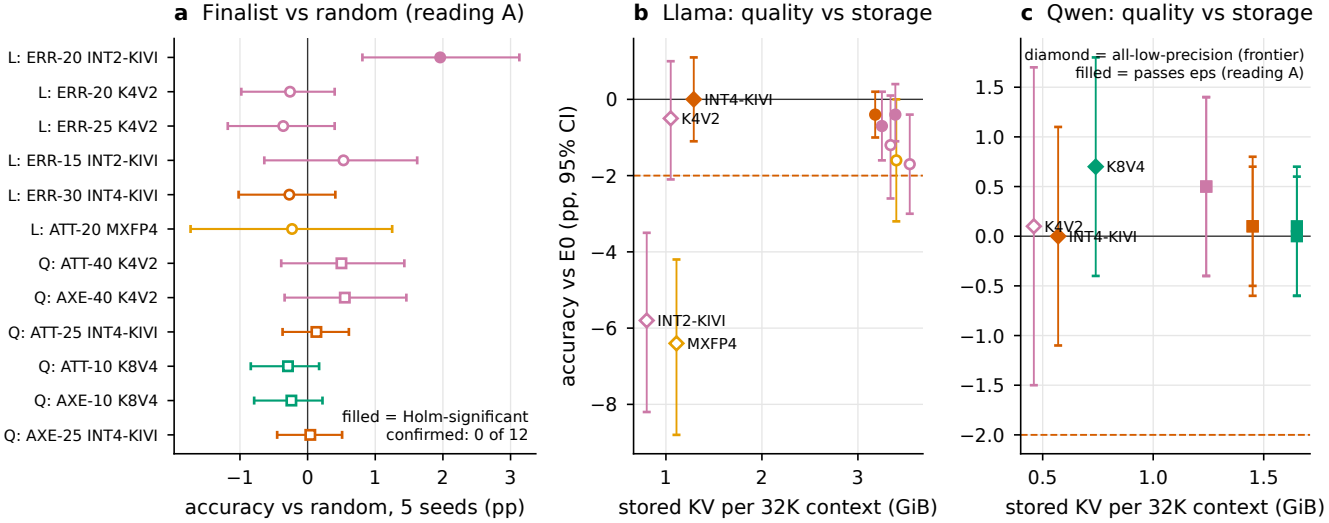
a Finalist vs random (reading A)
L: ERR-20 INT2-KIVI
L: ERR-20 K4V2
L: ERR-25 K4V2
L: ERR-15 INT2-KIVI
L: ERR-30 INT4-KIVI
L: ATT-20 MXFP4
Q: ATT-40 K4V2
Q: AXE-40 K4V2
Q: ATT-25 INT4-KIVI
Q: ATT-10 K8V4
Q: AXE-10 K8V4
Q: AXE-25 INT4-KIVI
filled = Holm-significant
confirmed: 0 of 12
−1
0
1
2
3
accuracy vs random, 5 seeds (pp)
b Llama: quality vs storage
accuracy vs E0 (pp, 95% CI)
0
−2
−4
−6
−8
INT4-KIVI
K4V2
INT2-KIVI
MXFP4
1
2
3
stored KV per 32K context (GiB)
c Qwen: quality vs storage
diamond = all-low-precision (frontier)
filled = passes eps (reading A)
1.5
1.0
0.5
0.0
−0.5
−1.0
−1.5
−2.0
K8V4
K4V2
INT4-KIVI
0.5
1.0
1.5
stored KV per 32K context (GiB)