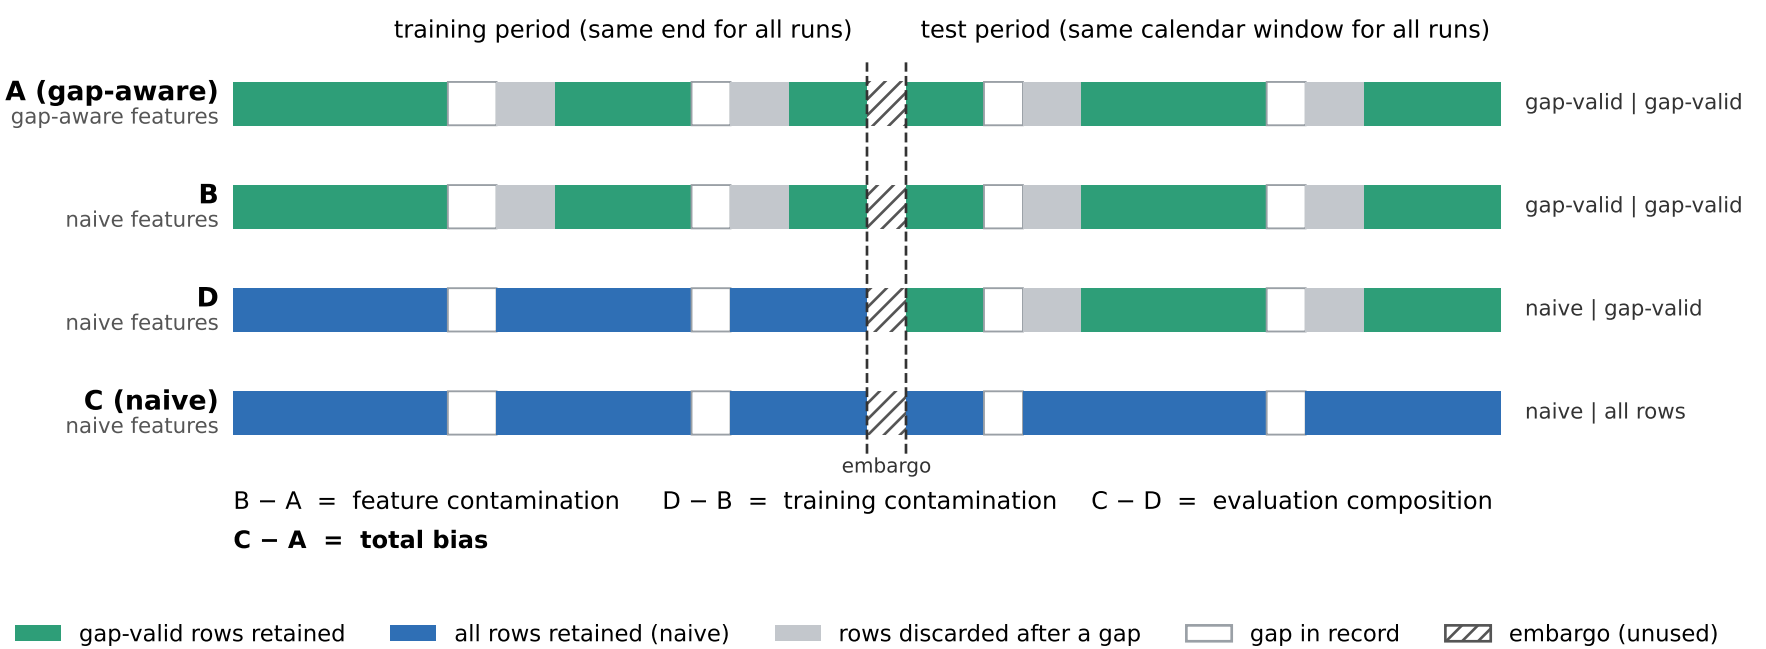
The four configurations. Only gap handling differs; the test period is identical.
training period (same end for all runs)
test period (same calendar window for all runs)
A (gap-aware)
gap-aware features
B
naive features
D
naive features
C (naive)
naive features
gap-valid | gap-valid
gap-valid | gap-valid
naive | gap-valid
naive | all rows
embargo
B − A = feature contamination
D − B = training contamination
C − D = evaluation composition
C − A = total bias
gap-valid rows retained
all rows retained (naive)
rows discarded after a gap
gap in record
embargo (unused)