QUESTION AND ANSWER

TEXT AND CLEANING:

1)Q: =TRIM()


A: Removes unnecessaryspaces

2)Q: =LEFT()

A: Extracts characters from beginning

3)Q: =MID()

A: Extracts characters from middle

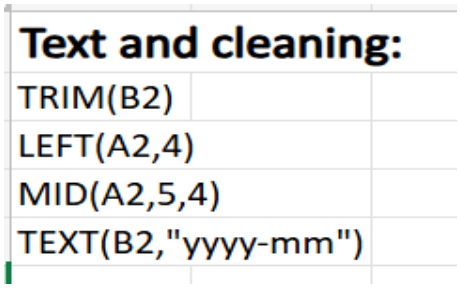


Text and cleaning:
TRIM(B2)
LEFT(A2,4)
MID(A2,5,4)
TEXT(B2,"yyyy-mm")

DATA VALIDATION:

1)Q: =IF()

A: Checks a condition and returns results based on true/false

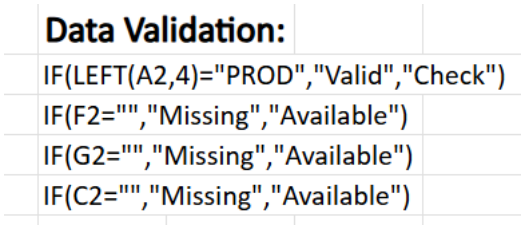

Data Validation:
IF(LEFT(A2,4)="PROD","Valid","Check")
IF(F2="","Missing","Available")
IF(G2="","Missing","Available")
IF(C2="","Missing","Available")

SALES CALCULATION:

1)Q: = F2*G2*(1-H2)

A: I multiplied the quantity by the unit price and then deducted the discount.

2)Q: IF(J2>1000,"High","Normal")

A: If the sales amount is greater than 1,000, it displays High. Otherwise, it displays Normal.

3)Q: =YEAR(B2)

A: Extracts the year from a date.

Sales Calculations:
F2*G2*(1-H2)
IF(J2>1000,"High","Normal")
YEAR(B2)

LOOKUP FORMULAS:

1)Q: =XLOOKUP()

A: I used XLOOKUP to bring customer, product and store details into the sales data by matching their IDs.

Lookup:
XLOOKUP(C2,Clean_Customer!$A$2:$A$501,Clean_Customer!$B$2:$B$501,"Not Found")
XLOOKUP(D2,Clean_Product!$A$2:$A$101,Clean_Product!$B$2:$B$101,"Not Found")
XLOOKUP(D2,Clean_Product!$A$2:$A$101,Clean_Product!$C$2:$C$101,"Not Found")
XLOOKUP(E2,Clean_Store!$A$2:$A$21,Clean_Store!$B$2:$B$21,"Not Found")
XLOOKUP(E2,Clean_Store!$A$2:$A$21,Clean_Store!$C$2:$C$21,"Not Found")

STATISTICS:

1)Q: `=SUM(Sales_Analysis!J2:J2001)`

A: Adds all the numbers in a selected range[J2 to J2001]

2)Q: =AVERAGE(Sales_Analysis!J2:J2001)

A: I used it to calculate average sales per order.

3)Q: =MEDIAN(Sales_Analysis!J2:J2001)

A: Finds the middle value.

4)Q: =STDEV(Sales_Analysis!J2:J2001)

A: Measures how much the sales values vary from their average.

5)Q: =MIN(Sales_Analysis!J2:J2001)

A: Finds smallest value[sales amount] in selected range.

6)Q: =MAX(Sales_Analysis!J2:J2001)

A: Finds the largest sales amount in the selected range.

7)Q: =COUNT(Sales_Analysis!J2:J2001)

A: I used it to count the numeric sales entries.

Statistics:
SUM(Sales_Analysis!J2:J2001)
AVERAGE(Sales_Analysis!J2:J2001)
MEDIAN(Sales_Analysis!J2:J2001)
MODE.SNGL(Sales_Analysis!J2:J2001)
STDEV.S(Sales_Analysis!J2:J2001)
MIN(Sales_Analysis!J2:J2001)
MAX(Sales_Analysis!J2:J2001)
COUNT(Sales_Analysis!J2:J2001)
SUM(Sales_Analysis!F2:F2001)
AVERAGE(Sales_Analysis!H2:H2001)

CONDITIONAL FORMULAS:

1)Q: =COUNTIF(Sales Analysis!I2:I2001,"Credit Card")

A: I used it to count orders paid by credit card.

2)Q: =SUMIF(Sales_Analysis!X2:X2001,"South",'Sales Analysis'!J2:J2001)

A: I used it to calculate total sales in the South region.

Conditional Formulas:
COUNTIF(Sales_Analysis!I2:I2001,"Credit Card")
SUMIF(Sales_Analysis!X2:X2001,"South",Sales_Analysis!J2:J2001)
SUMIF(Sales_Analysis!X2:X2001,A20,Sales_Analysis!J2:J2001)
SUMIF(Sales_Analysis!X2:X2001,D20,Sales_Analysis!J2:J2001)
COUNTIF(Sales_Analysis!I2:I2001,G20)
SUMIF(Sales_Analysis!I2:I2001,G20,Sales_Analysis!J2:J2001)