



HeeraMon

User Journeys and Use Cases

Use Case Document

Date of Preparation: September 30, 2026

Document ID	HM-DOC-03
Title	User Journeys and Use Cases
Classification	Use Case Document
Status	Draft
Version	1.0
Owner	Product / Engineering
Audience	All project contributors
Related Documents	SRS (HM-DOC-02), Product Vision (HM-DOC-01)

Contents

1	Purpose	2
2	Core User Journey	3
3	Journey A — First-Time User	4
3.1	Scenario	4
3.2	Flow	4
3.3	Example	4
4	Journey B — Continuous Job Search	5
4.1	Scenario	5
4.2	Flow	5
5	Journey C — Close Match and Trade-Off Discussion	6
5.1	Scenario	6
6	Journey D — Learning From User Decisions	7
6.1	Example	7
7	Journey E — Selecting a Job for Application	8
7.1	Scenario	8
7.2	Flow	8
8	Journey F — Application Review and Human Approval	10
9	Journey G — Returning User	11
10	Primary Use Cases	12
10.1	UC-01 — Describe Desired Job	12
10.2	UC-02 — Modify Preferences	12
10.3	UC-03 — Search for Jobs	12
10.4	UC-04 — Present a Match	12
10.5	UC-05 — Investigate a Job	13
10.6	UC-06 — Accept or Reject Opportunity	13
10.7	UC-07 — Prepare Application	13
10.8	UC-08 — Review Application	13
10.9	UC-09 — Submit Application	13
10.10	UC-10 — Learn From Interaction	13
11	Exceptional / Failure Journeys	14
12	Document Control	15

1 Purpose

This document describes how users interact with HeeraMon and defines the primary user journeys and use cases.

The objective is to translate the requirements in the Software Requirements Specification into understandable real-world workflows.

2 Core User Journey

The central HeeraMon experience is:

**Describe → Understand → Search → Evaluate → Inform → Discuss →
Decide → Apply**

The user should not need to repeatedly configure searches. HeeraMon maintains the user's job-seeking context and continues searching in the background.

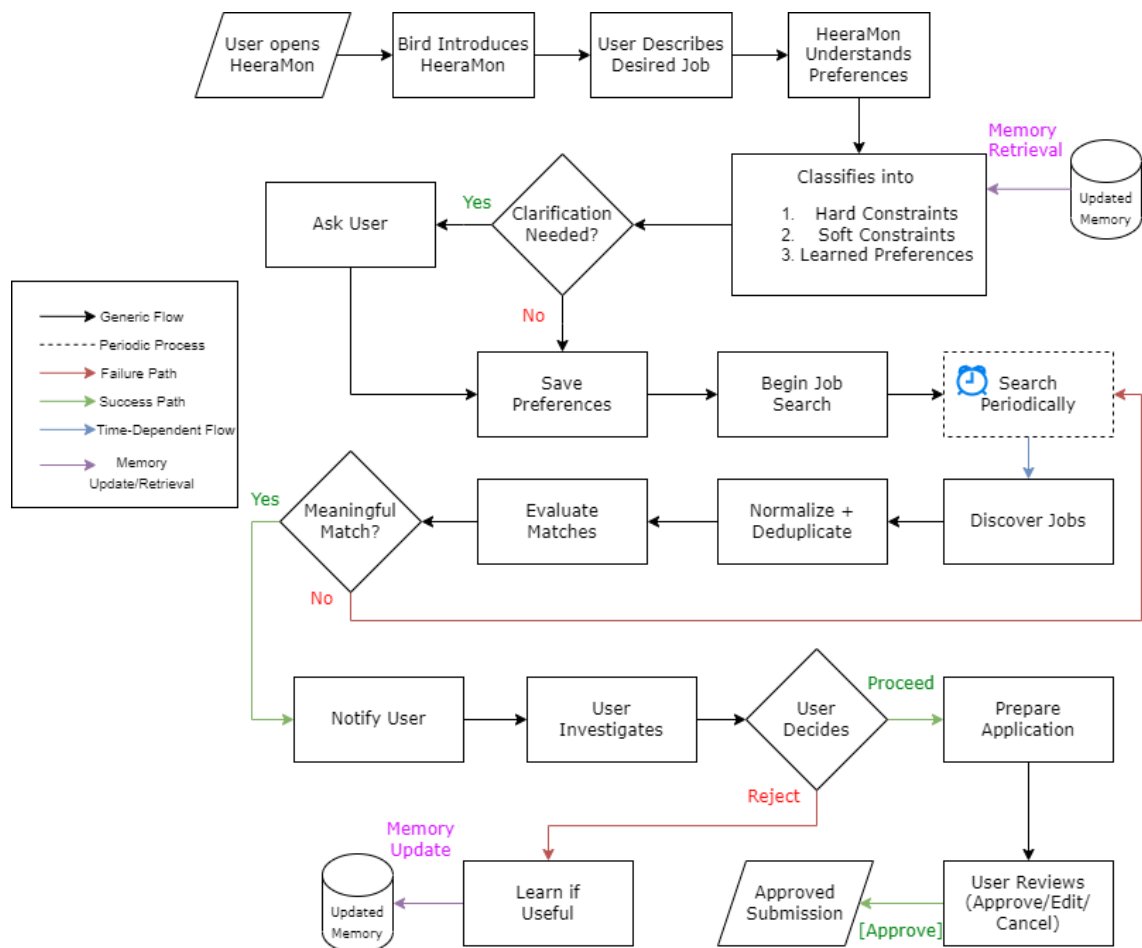


Figure 1: End-to-end user journey from describing desired work to job discovery, evaluation, decision, and application.

3 Journey A — First-Time User

3.1 Scenario

A new user opens HeeraMon for the first time.

3.2 Flow

1. HeeraMon introduces itself through the bird character.
2. The user is invited to describe what their next job should be like.
3. The user describes requirements naturally.
4. HeeraMon extracts relevant preferences.
5. HeeraMon identifies potential ambiguities.
6. HeeraMon asks short clarification questions only where necessary.
7. The resulting preferences are stored.
8. HeeraMon confirms the understood requirements.
9. The user can modify or correct them.
10. HeeraMon begins searching for suitable jobs.

3.3 Example

User:

“I want at least 40k BDT, an AI/ML role, maximum 30 minutes commute, around 7 hours a day, friendly colleagues and enough life outside work.”

HeeraMon may interpret this as:

Must have

- Minimum salary: 40k BDT
- AI/ML-related role
- Maximum commute: approximately 30 minutes

Preferred

- Approximately 7-hour workday
- Friendly workplace
- Good work-life balance

If the classification is uncertain, HeeraMon asks instead of assuming.

4 Journey B — Continuous Job Search

4.1 Scenario

The user has already described their preferences and leaves HeeraMon.

HeeraMon continues searching according to the configured search schedule.

4.2 Flow

1. Background search begins.
2. Available job sources are queried.
3. New jobs are collected.
4. Jobs are normalized and duplicates removed.
5. Jobs are evaluated against the user's preferences.
6. Strong matches and meaningful close matches are identified.
7. HeeraMon decides whether the opportunity is worth notifying the user about.
8. The user receives a notification or sees the opportunity when returning to HeeraMon.
9. The user can request details.

The user should not need to manually initiate every search.

5 Journey C — Close Match and Trade-Off Discussion

5.1 Scenario

HeeraMon finds a job that does not perfectly satisfy every preference.

“I found a close match. It meets your salary and AI/ML requirements, but the commute is approximately one hour instead of thirty minutes, and the workday is eight hours instead of seven.”

The user may ask:

“What else does it offer?”

HeeraMon provides the relevant information.

The user may then:

- Accept the trade-off
- Reject the opportunity
- Ask for more information
- Change a preference
- Ask HeeraMon to continue searching

The user’s decision may contribute to learned preferences when appropriate.

6 Journey D — Learning From User Decisions

HeeraMon should gradually understand what the user actually values.

6.1 Example

HeeraMon repeatedly presents opportunities around 35k BDT.

The user repeatedly rejects them because of salary.

HeeraMon may later infer that salary below a certain threshold is generally unacceptable.

However, inferred preferences should not silently become permanent hard constraints.

When useful, HeeraMon can confirm:

“You have rejected several opportunities below 40k because of salary. Should I treat 40k as your minimum from now on?”

The user decides.

7 Journey E — Selecting a Job for Application

7.1 Scenario

The user decides that a discovered job is worth pursuing.

7.2 Flow

1. User selects or tells HeeraMon to proceed.
2. HeeraMon retrieves the available application information.
3. HeeraMon prepares the application using the user's stored profile and CV.
4. HeeraMon identifies information that is missing or uncertain.
5. HeeraMon presents the proposed application information to the user.
6. User reviews the information.
7. User may correct or cancel.
8. HeeraMon proceeds only after explicit approval.
9. HeeraMon submits through a supported application workflow.
10. HeeraMon reports the result.

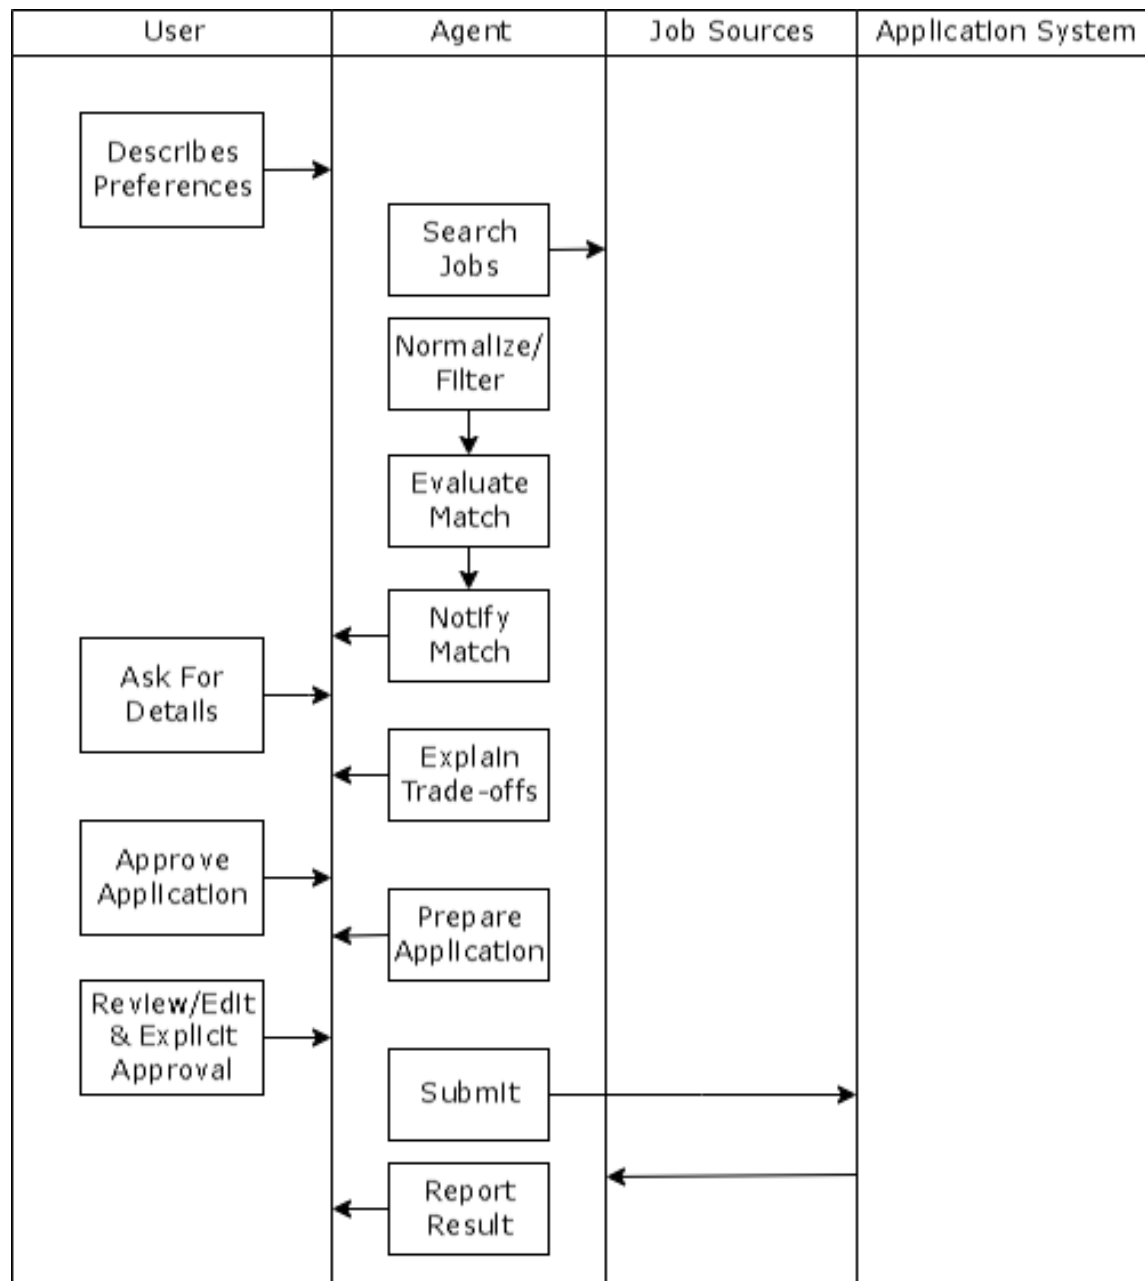


Figure 2: Detailed interaction between the user, HeeraMon agent, job sources, matching system, and application workflow.

8 Journey F — Application Review and Human Approval

HeeraMon must not silently submit consequential information.

Before submission, the user should see important fields such as:

- Name
- Contact information
- Education
- Experience
- Skills
- CV
- Cover letter where applicable
- Answers to application questions
- Other information being submitted

The user can:

- **Approve** → Submit
- **Edit** → Review again
- **Cancel** → Return to job

HeeraMon must never invent qualifications or experience to complete an application.

9 Journey G — Returning User

When a user returns after a period away, HeeraMon should preserve continuity.

The user may see:

- New relevant jobs
- Previously discussed jobs
- Application progress
- Preference changes
- Pending decisions
- Important notifications

The user should be able to continue the conversation without reconstructing their requirements.

10 Primary Use Cases

10.1 UC-01 — Describe Desired Job

Actor: User

Goal: Tell HeeraMon what kind of work they want.

Precondition: User has access to HeeraMon.

Main flow:

1. User starts a conversation.
2. User describes desired work naturally.
3. HeeraMon interprets the description.
4. HeeraMon asks clarification questions if required.
5. Preferences are stored.
6. HeeraMon confirms the result.

Outcome: A usable preference profile exists.

10.2 UC-02 — Modify Preferences

Actor: User

Goal: Change previously established requirements.

Example:

“Actually, I’m willing to commute for 45 minutes if the salary is at least 50k.”

HeeraMon updates the relevant preference while preserving unrelated preferences.

10.3 UC-03 — Search for Jobs

Actor: HeeraMon

Goal: Discover newly available opportunities.

Main flow:

1. Trigger scheduled search.
2. Query available sources.
3. Collect jobs.
4. Normalize and deduplicate.
5. Evaluate against user preferences.
6. Store relevant opportunities.

10.4 UC-04 — Present a Match

Actor: HeeraMon

Goal: Inform the user about a meaningful opportunity.

HeeraMon presents the opportunity and summarizes important matches, mismatches, and uncertainties.

10.5 UC-05 — Investigate a Job

Actor: User

Goal: Ask questions about a job.

The user can request details about salary, responsibilities, company, commute, working hours, benefits, requirements, or other available information.

10.6 UC-06 — Accept or Reject Opportunity

Actor: User

Goal: Record a decision about an opportunity.

The decision may affect future learned preferences.

10.7 UC-07 — Prepare Application

Actor: User + HeeraMon

Goal: Prepare an application for an accepted opportunity.

HeeraMon uses available user information and identifies missing or uncertain information.

10.8 UC-08 — Review Application

Actor: User

Goal: Verify what HeeraMon intends to submit.

The user can edit, approve, or cancel.

10.9 UC-09 — Submit Application

Actor: User + HeeraMon

Goal: Submit an approved application through a supported workflow.

Precondition: User has explicitly approved the final application.

Outcome: Application is submitted or a clear failure state is reported.

10.10 UC-10 — Learn From Interaction

Actor: HeeraMon

Goal: Improve future recommendations using relevant user decisions and conversations.

Learned preferences must remain distinguishable from explicit user requirements.

11 Exceptional / Failure Journeys

HeeraMon should have defined behavior when:

- A job source is unavailable.
- A job disappears after being discovered.
- Important job information is missing.
- Two sources provide conflicting information.
- A job is clearly outdated.
- AI interpretation is uncertain.
- Application information is incomplete.
- An external application system fails.
- A notification cannot be delivered.
- The user changes preferences while a background search is running.

In all cases, HeeraMon should prefer transparency and recoverability over pretending that the operation succeeded.

12 Document Control

Version	Date	Author / Role	Changes
1.0	September 30, 2026	Product / Engineering	Initial release

Approval: This document defines the primary user journeys and use cases for HeeraMon. All subsequent design and implementation work must remain consistent with these workflows.

HeeraMon flies to help people find job that fits not only their career, but the life they want to live.



Saadman Sakib
Product Engineer