Question 1

Which is the output of the following Java code?

```
interface calculate
   {
       void cal(int item);
   }
   class calculator1 implements calculate
   {
       int x;
       public void cal(int item)
       {
           x = item * item;
       }
   }
   class calculator2 implements calculate
   {
       int x;
       public void cal(int item)
       {
           x = item / item;
       }
   }
   class interfaces
   {
       public static void main(String args[])
       {
           calculator1 c1 = new calculator1();
           calculator2 c2 = new calculator2();
           c1.x = 0;
           c2.x = 0;
           c1.cal(2);
           c2.cal(2);
           System.out.print(c1.x + " " + c2.x);
       }
   }
```

Last saved 15:03:25

Questions Filter (11) ▾

```
        x = 1com / 1com;
    }
}
class interfaces
{
    public static void main(String args[])
    {
        calculator1 c1 = new calculator1();
        calculator2 c2 = new calculator2();
        c1.x = 0;
        c2.x = 0;
        c1.cal(2);
        c2.cal(2);
        System.out.print(c1.x + " " + c2.x);
    }
}
```

(A) 00

(B) 41

(C) 22

(D) 14

Question 2

6 Points

Which is the output of the following Java code?

```
class Counter{
static int count=0;

Counter(){
count++;
System.out.println(count);
}
```

41 minutes remaining

10 OF 11 QUESTIONS REMAINING

Question 2

6 Points

Which is the output of the following Java code?

```
class Counter{
static int count=0;

Counter(){
count++;
System.out.println(count);
}

public static void main(String args[]){
//creating objects
Counter c1=new Counter();
Counter c2=new Counter();
Counter c3=new Counter();
}
```

(A) 1 2 3

(B) 0 0 0

(C) 1 1 1

(D) Runtime Error

Question 3

5 Points

Which of these access specifiers can be used for an interface?

(A) public

(B) All of the mentioned

Last saved 15:04:40

Questions Filter (11)

(D) Runtime Error

Question 3

Which of these access specifiers can be used for an interface?

(A) public

(B) All of the mentioned

(C) protected

(D) private

Question 4

If a variable is declared as protected, then it can be used

(A) In any class of the same package

(B) In any class from any package

(C) In the same class and the subclasses in the package

(D) Only in the same class

Question 5

ming
ngs
Search

Question 5

Which concept of Object Oriented Programming is used to convert real words objects *in terms of classes?*

- (A) Inheritance
- (B) Overloading
- (C) Abstraction
- (D) Data Hiding

Question 6

Given the following code fill the blank spaces with the correct word:

```
public class Main {
  int modelYear;
  String modelName;

  public Main(int year, String name) {
    modelYear = year;
    modelName = Blank 1;
  }
  public static void main(String args) {
    Main myCar = new Blank 2(1969, "Mustang");
    System.out.println("My car model is " + Blank 3.modelName);
  }
}
```

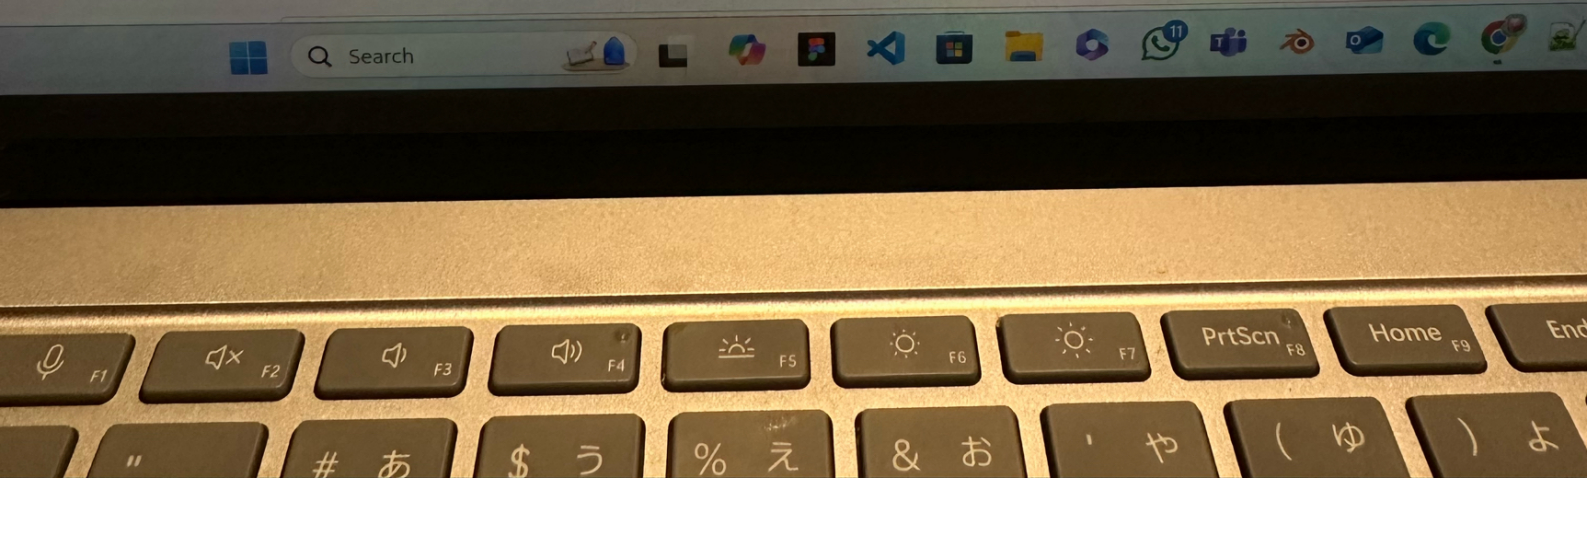

Question 6

Given the following code fill the blank spaces with the correct word:

```
public class Main {
 int modelYear;
 String modelName;

 public Main(int year, String name) {
   modelYear = year;
   modelName = Blank 1;
 }
 public static void main(String args) {
    Main myCar = new Blank 2(1969, "Mustang");
    System.out.println("My car model is " + Blank 3.modelName);
 }
}
```

Blank 1 Add your answer

Blank 2 Add your answer

Blank 3 Add your answer

Question 7

Which of this keyword can be used in a subclass to call the constructor of supercl

(A) this

stminster.ac.uk/ultra/courses/_97941_1/outline/assessment/_5350952_1/overview/attempt/_5960697_1?courseId=

Question 7

Which of this keyword can be used in a subclass to call the constructor of superclass?

(A) this

(B) super

(C) extends

(D) implements

Question 8

What is the output of the following code?

```
import java.util.*;
   class Arraylist
   {
       public static void main(String args[])
       {
           ArrayList obj = new ArrayList();
           obj.add("A");
           obj.add("B");
           obj.add("C");
           obj.add(1, "D");
           System.out.println(obj);
       }
}
```

Question 8

What is the output of the following code?

```
import java.util.*;
   class Arraylist
   {
       public static void main(String args[])
       {
           ArrayList obj = new ArrayList();
           obj.add("A");
           obj.add("B");
           obj.add("C");
           obj.add(1, "D");
           System.out.println(obj);
       }
}
```

(A) A D C

(B) A D B C

(C) A B C

(D) A B C D

Question 9

Which among the following is not one of the principles of the Object Oriented Prog

Search

Question 9

Which among the following is not one of the principles of the Object Oriented Programming?

(A) Platform independence

(B) Polymorphism

(C) Data Hiding

(D) Abstraction

Question 10

How to sort elements of ArrayList listObj?

(A) Sorter.sortAsc(listObj);

(B) Collection.sort(listObj);

(C) listObj.sort();

(D) Collections.sort(listObj);

Question 11

Search

Question 11

What is the output of the following Java code?

```
class A
   {
        int i;
        public void display()
        {
            System.out.println(i);
        }
   }

   class B extends A
  {
        int j;
        public void display()
        {
            System.out.println(j);
        }
   }

   class Dynamic_dispatch
  {
        public static void main(String args[])
        {
            B obj2 = new B();
            obj2.i = 1;
            obj2.j = 2;
            A r;
            r = obj2;
            r.display();
        }
  }
```

(A) 3

```
        {
            System.out.println(j);
        }
    }

    class Dynamic_dispatch
{
        public static void main(String args[])
        {
            B obj2 = new B();
            obj2.i = 1;
            obj2.j = 2;
            A r;
            r = obj2;
            r.display();
        }
}
```

(A) 3

(B) 4

(C) 2

(D) 1

Additional content

Drag and drop files here or click to add text.

Search