

# Cucumber Report

Aug 2, 2024, 8:41:57 PM

Start : Aug 02, 8:41:02.436 PM

End : Aug 02, 8:41:57.068 PM

Duration : 54.632 s

Features

Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 3  
FAILED - 1  
SKIPPED - 4



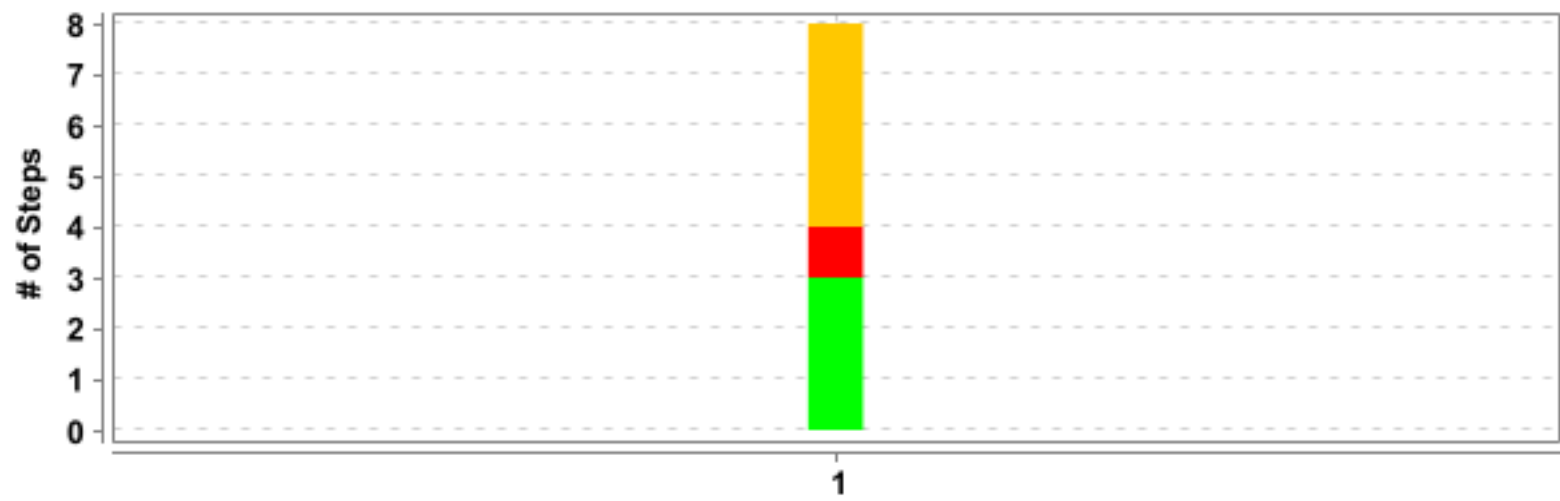
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Title of your feature</u>	54.632 s	1	0	1	0	8	3	1	4

#	Feature Name	Scenario Name
1	<u>Title of your feature</u>	<u>Checkout</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@qaf_checkout	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	1	0	1	0	54.632 s

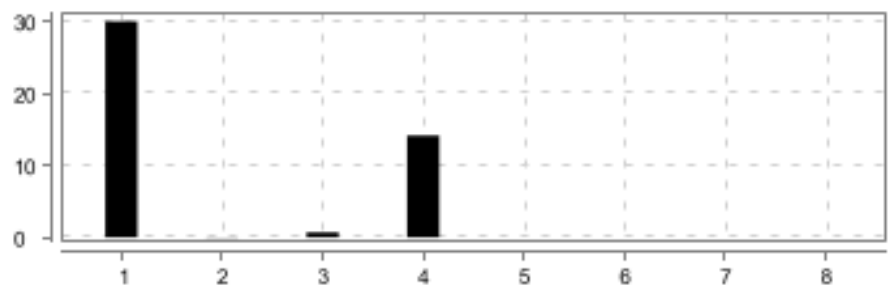



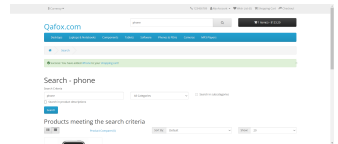
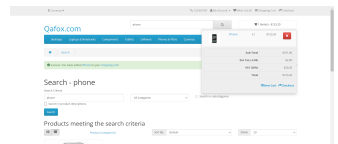
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	<u>Checkout</u>	8	3	1	4	54.629 s

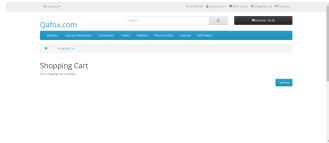
## Title of your feature

<b>FAILED</b>	<b>DURATION - 54.632 s</b>	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 8 Pass - 3 Fail - 1 Skip - 4	
/ 8:41:02.436 PM // 8:41:57.068 PM /					

## Checkout

<div>FAILED</div> <div>DURATION - 54.629 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 3</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 8:41:02.439 PM // 8:41:57.068 PM /				
Title of your feature				
@qaf_checkout				

#	Step / Hook Details	Status	Duration
1	Given the product is added to the cart	PASSED	30.008 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.162 s
	image 		
2	And user clicks on cart button	PASSED	0.040 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.188 s
	image 		

#	Step / Hook Details	Status	Duration
3	Then user clicks on checkout link	PASSED	0.685 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.191 s
	<p>image</p> 		
4	Then user click on Estimate Shipping & Taxes dropdown button	FAILED	14.136 s
	<p>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d61ea2475aeb4a461b90f7a6d34f8957, findElement [using, value]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 127.0.6533.89, chrome: {chromedriverVersion: 127.0.6533.88 (a2d0cb026721..., userDataDir: C:\Users\joseph\AppData\Loc...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54813}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54813/devtoo..., se.cdpVersion: 127.0.6533.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d61ea2475aeb4a461b90f7a6d34f8957</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)  at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165)  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355)  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349)  at com.pdl.step_definitions.Checkout_F.user_click_on_estimate_shipping_taxes_dropdown_button(Checkout_F.java:45)  at ?.user click on Estimate Shipping &amp; Taxes dropdown button(file:///C:/Users/joseph/git/EALIT-TeamB/src/test/resources/features/Quafox_Chekcout.feature:11)</p> <p>Caused by: java.io.UncheckedIOException: java.net.SocketException: Connection reset</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)  at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)  at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)  at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)  at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)  at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165)  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355)</p>		



#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at com.pdl.step_definitions.Checkout_F.user_click_on_estimate_shipping_taxes_dropdown_button(Checkout_F.java:45) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.SocketException: Connection reset at java.base/sun.nio.ch.SocketChannelImpl.throwConnectionReset(SocketChannelImpl.java:394) at java.base/sun.nio.ch.SocketChannelImpl.read(SocketChannelImpl.java:426) at io.netty.buffer.PooledByteBuf.setBytes(PooledByteBuf.java:256) at io.netty.buffer.AbstractByteBuf.writeBytes(AbstractByteBuf.java:1132) at io.netty.channel.socket.nio.NioSocketChannel.doReadBytes(NioSocketChannel.java:357) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read(AbstractNioByteChannel.java:151) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:788) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:842) * Not displayable characters are replaced by '?'. </pre>		
	<p><b>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)</b></p> <pre> org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d61ea2475aeb4a461b90f7a6d34f8957, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 127.0.6533.89, chrome: {chromedriverVersion: 127.0.6533.88 (a2d0cb026721..., userDataDir: C:\Users\joseph\AppData\Loc...), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54813}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54813/devtoo..., se:cdpVersion: 127.0.6533.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d61ea2475aeb4a461b90f7a6d34f8957 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) </pre>	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<p>at com.pdl.hooks.Hooks.takeScreenshot(Hooks.java:107)</p> <p>Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:10912</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)</p> <p>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800)</p> <p>at com.pdl.utilities.Driver.getDriver(Driver.java:49)</p> <p>at com.pdl.hooks.Hooks.takeScreenshot(Hooks.java:107)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:568)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45)</p> <p>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)</p> <p>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</p> <p>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:53)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:84)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:10912 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:842) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:10912 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:842)		
5	Then user fills up shipping form	SKIPPED	0.003 s
6	Then user click on get quote button	SKIPPED	0.001 s
7	Then user select Flat Shipping Rate and click on Apply Shipping	SKIPPED	0.000 s
8	Then user click on checkout button	SKIPPED	0.001 s
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d61ea2475aeb4a461b90f7a6d34f8957, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 127.0.6533.89, chrome: {chromedriverVersion: 127.0.6533.88 (a2d0cb026721..., userDataDir: C:\Users\joseph\AppData\Loc...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54813}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:54813/devtoo..., se.cdpVersion: 127.0.6533.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d61ea2475aeb4a461b90f7a6d34f8957 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49)	FAILED	0.017 s

#	Step / Hook Details	Status	Duration
	<p>at com.pdl.hooks.Hooks.tearDown(Hooks.java:129)</p> <p>Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:10912</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)</p> <p>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800)</p> <p>at com.pdl.utilities.Driver.getDriver(Driver.java:49)</p> <p>at com.pdl.hooks.Hooks.tearDown(Hooks.java:129)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:568)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)</p> <p>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</p> <p>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:53)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:90)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p>		

#	Step / Hook Details	Status	Duration
	<p> at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)  at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)  at org.junit.runners.ParentRunner.run(ParentRunner.java:309)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)  at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)  at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)  at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)  at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)  at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)  at org.junit.runners.ParentRunner.run(ParentRunner.java:309)  at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)  at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:10912  at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)  at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)  at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)  at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)  at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)  at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)  at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)  at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)  at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)  at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)  at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)  at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)  at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)  at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)  at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)  at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)  at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) </p>		

#	Step / Hook Details	Status	Duration
	<pre>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:842) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:10912 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:842)</pre>		