

# Cucumber Report

Jul 17, 2024, 8:00:39 PM

Start : Jul 17, 8:00:27.193 PM

End : Jul 17, 8:00:37.118 PM

Duration : 9.925 s

Features

Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 0  
SKIPPED - 8



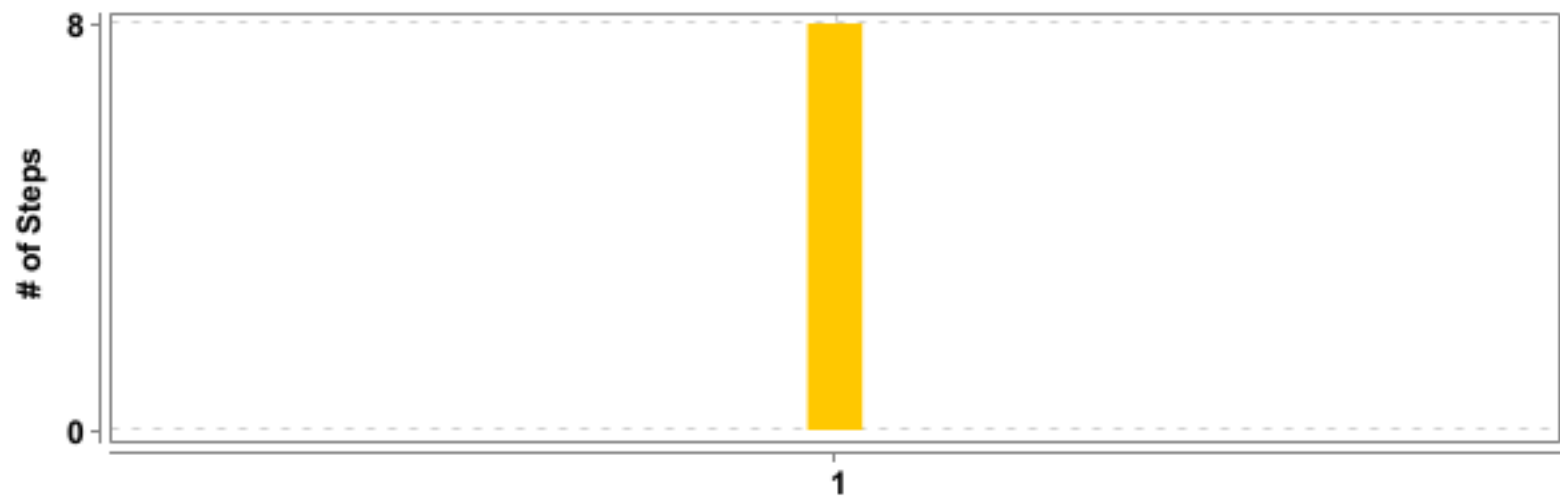
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Working on YourStore Search and Add to cart button</u>	9.925 s	1	0	1	0	8	0	0	8

#	Feature Name	Scenario Name
1	<u>Working on YourStore Search and Add to cart button</u>	<u>User searches Phone and adding to the cart and sees a success message</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Search_And_AddToCart	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Working on YourStore Search and Add to cart button</u>	1	0	1	0	9.925 s

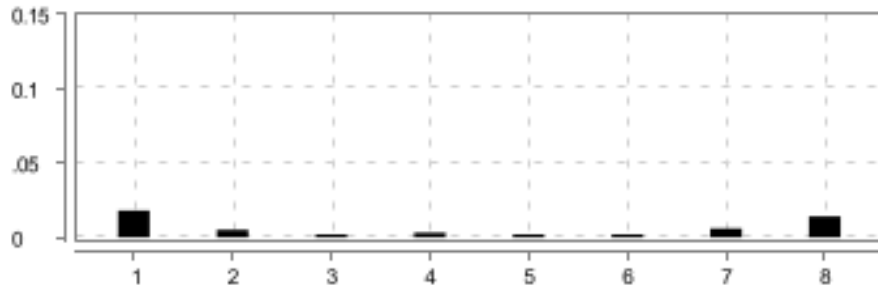



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Working on YourStore Search and Add to cart button</u>	<u>User searches Phone and adding to the cart and sees a success message</u>	8	0	0	8	9.914 s

## Working on YourStore Search and Add to cart button

<b>FAILED</b>	DURATION - 9.925 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 8 Pass - 0 Fail - 0 Skip - 8	
/ 8:00:27.193 PM // 8:00:37.118 PM /					

## User searches Phone and adding to the cart and sees a success message

<div>FAILED</div> <div>DURATION - 9.914 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 8</div>	<div></div>
/ 8:00:27.204 PM // 8:00:37.118 PM /				
Working on YourStore Search and Add to cart button				
@Search_And_AddToCart				

#	Step / Hook Details	Status	Duration
	BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)  java.lang.ExceptionInInitializerError at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)	FAILED	9.776 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: Chrome failed to start: exited normally. (session not created: DevToolsActivePort file doesn't exist) (The process started from chrome location C:\Users\Ummay Roman\AppData\Local\Google\Chrome\Application\chrome.exe is no longer running, so ChromeDriver is assuming that Chrome has crashed.) Host info: host: 'DESKTOP-KR7E8UK', ip: '192.168.1.43' Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*], binary: C:\Users\Ummay Roman\AppData..., extensions: []}}]]</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)</p>		



#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:232) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:159) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:108) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:88) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:83) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:51) at com.pdl.utilities.Driver.getDriver(Driver.java:37) at com.pdl.utilities.CommonMethods.<clinit>(CommonMethods.java:76)		
	<b>BEFORE - com.pdl.hooks.Hooks.setUp()</b> java.lang.NoClassDefFoundError: Could not initialize class com.pdl.hooks.Hooks at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
1	Given User is logged in	SKIPPED	0.018 s
2	And the user is on the home page	SKIPPED	0.005 s
3	Then User Clicks on Search bar	SKIPPED	0.002 s
4	When the user searches for "<Product Name>"	SKIPPED	0.003 s
5	And User click search button	SKIPPED	0.002 s
6	And the user adds product to the cart	SKIPPED	0.002 s
7	And the Total number of results are <Id>	SKIPPED	0.006 s
8	Then the user should see a success message "Item has been added to your cart"	SKIPPED	0.014 s
	<div>Product Name Id</div> <div>Phone 1</div> <div>Macbook Pro 1</div> <div>iMac 1</div>		
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.005 s
	java.lang.NoClassDefFoundError: Could not initialize class com.pdl.hooks.Hooks		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)		

#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
	<b>AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)</b> java.lang.NoClassDefFoundError: Could not initialize class com.pdl.hooks.Hooks at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</pre>		