EXPERIMENT-1

16/7/26

STUDY OF VARIOUS NETWORK COMMANDS USED IN LINUX AND WINDOWS

BASIC NETNORKING COMMANDS:

1) arp -a

2) hostname

3) ipconfig/all

```
PS C:\Users\laksh> arp -a

Interface: 192.168.56.1 --- 0x8
  Internet Address      Physical Address      Type
  192.168.56.255        ff-ff-ff-ff-ff-ff     static
  224.0.0.22            01-00-5e-00-00-16     static
  224.0.0.251           01-00-5e-00-00-fb     static
  224.0.0.252           01-00-5e-00-00-fc     static
  239.255.255.250       01-00-5e-7f-ff-fa     static
  255.255.255.255       ff-ff-ff-ff-ff-ff     static

Interface: 192.168.29.51 --- 0x9
  Internet Address      Physical Address      Type
  192.168.29.1          b4-a7-c6-cb-30-ee     dynamic
  192.168.29.255        ff-ff-ff-ff-ff-ff     static
  224.0.0.22            01-00-5e-00-00-16     static
  224.0.0.251           01-00-5e-00-00-fb     static
  224.0.0.252           01-00-5e-00-00-fc     static
  239.255.255.250       01-00-5e-7f-ff-fa     static
  255.255.255.255       ff-ff-ff-ff-ff-ff     static
```

```
PS C:\Users\laksh> hostname
Paranthu_ASUS
```

```
PS C:\Users\laksh> ipconfig

Windows IP Configuration


Ethernet adapter Ethernet 2:

   Connection-specific DNS Suffix  . :
   Link-local IPv6 Address . . . . . : fe80::ae3b:74d8:4022:7298%8
   IPv4 Address. . . . . . . . . . . : 192.168.56.1
   Subnet Mask . . . . . . . . . . . : 255.255.255.0
   Default Gateway . . . . . . . . . :

Wireless LAN adapter Local Area Connection* 1:

   Media State . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :

Wireless LAN adapter Local Area Connection* 2:

   Media State . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :

Wireless LAN adapter Wi-Fi:

   Connection-specific DNS Suffix  . :
   IPv6 Address. . . . . . . . . . . : 2405:201:e00a:90cb:9ea5:9217:4961:f0a4
   Temporary IPv6 Address. . . . . . : 2405:201:e00a:90cb:412b:9c5c:ae35:db9d
   Link-local IPv6 Address . . . . . : fe80::7de5:ee90:259:3f56%9
   IPv4 Address. . . . . . . . . . . : 192.168.29.51
   Subnet Mask . . . . . . . . . . . : 255.255.255.0
   Default Gateway . . . . . . . . . : fe80::b6a7:c6ff:fecb:30ee%9
                                       192.168.29.1
```

4) nbtstat -a

5) netstat

```
PS C:\Users\laksh> nbtstat -a

Displays protocol statistics and current TCP/IP connections using NBT
(NetBIOS over TCP/IP).

NBTSTAT [ [-a RemoteName] [-A IP address] [-c] [-n]
        [-r] [-R] [-RR] [-s] [-S] [interval] ]

  -a   (adapter status) Lists the remote machine's name table given its name
  -A   (Adapter status) Lists the remote machine's name table given its
                        IP address.
  -c   (cache)          Lists NBT's cache of remote [machine] names and their IP addresses
  -n   (names)          Lists local NetBIOS names.
  -r   (resolved)       Lists names resolved by broadcast and via WINS
  -R   (Reload)         Purges and reloads the remote cache name table
  -S   (Sessions)       Lists sessions table with the destination IP addresses
  -s   (sessions)       Lists sessions table converting destination IP
                        addresses to computer NETBIOS names.
  -RR  (ReleaseRefresh) Sends Name Release packets to WINS and then, starts Refresh

  RemoteName   Remote host machine name.
  IP address   Dotted decimal representation of the IP address.
  interval     Redisplays selected statistics, pausing interval seconds
               between each display. Press Ctrl+C to stop redisplaying
               statistics.
```

```
PS C:\Users\laksh> netstat

Active Connections

  Proto  Local Address          Foreign Address        State
  TCP    127.0.0.1:49670        Paranthu_ASUS:49671    ESTABLISHED
  TCP    127.0.0.1:49671        Paranthu_ASUS:49670    ESTABLISHED
  TCP    127.0.0.1:49672        Paranthu_ASUS:49673    ESTABLISHED
  TCP    127.0.0.1:49673        Paranthu_ASUS:49672    ESTABLISHED
  TCP    192.168.29.51:49187    204.79.197.222:https   ESTABLISHED
  TCP    192.168.29.51:49701    40.126.17.131:https    TIME_WAIT
  TCP    192.168.29.51:49712    20.201.214.0:https     TIME_WAIT
  TCP    192.168.29.51:49718    20.201.200.92:https    TIME_WAIT
  TCP    192.168.29.51:49719    ec2-13-204-106-34:https  ESTABLISHED
  TCP    192.168.29.51:49720    4.145.11.36:https      TIME_WAIT
  TCP    192.168.29.51:52555    72.145.35.99:https     ESTABLISHED
  TCP    192.168.29.51:52556    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52557    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52558    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52559    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52560    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52561    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52562    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52563    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52564    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52565    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52566    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52567    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52568    a23-41-121-187:https   ESTABLISHED
  TCP    192.168.29.51:52569    72.153.5.97:https      ESTABLISHED
  TCP    192.168.29.51:52570    72.153.5.60:https      ESTABLISHED
  TCP    192.168.29.51:52571    72.153.5.60:https      ESTABLISHED
  TCP    192.168.29.51:52572    72.153.5.138:https     ESTABLISHED
  TCP    192.168.29.51:58551    52.184.215.111:https   CLOSE_WAIT
  TCP    192.168.29.51:59005    135.237.220.44:https   TIME_WAIT
  TCP    192.168.29.51:59704    bingforbusiness:https  TIME_WAIT
  TCP    192.168.29.51:60127    52.105.229.27:https    TIME_WAIT
  TCP    192.168.29.51:60960    40.126.17.131:https    ESTABLISHED
  TCP    192.168.29.51:61138    4.145.11.36:https      ESTABLISHED
  TCP    192.168.29.51:61140    23.100.110.221:https   ESTABLISHED
  TCP    192.168.29.51:61165    ec2-13-204-106-34:https  ESTABLISHED
  TCP    192.168.29.51:61403    40.74.98.196:https     TIME_WAIT
  TCP    192.168.29.51:61444    40.126.17.131:https    ESTABLISHED
  TCP    192.168.29.51:61696    20.135.4.173:https     TIME_WAIT
```

6) nslookup:

nslookup www.google.com

7) pathping

```
PS C:\Users\laksh> nslookup www.google.com
Server:  reliance.reliance
Address:  2405:201:e00a:90cb::c0a8:1d01

Non-authoritative answer:
Name:    www.google.com
Addresses:  2001:4860:4829:7700::
          2001:4860:482c:7700::
          2001:4860:482b:7700::
          2001:4860:482d:7700::
          2001:4860:482a:7700::
          2001:4860:4828:7700::
          2001:4860:4826:7700::
          2001:4860:4827:7700::
          142.251.155.119
          142.251.153.119
          142.251.152.119
          142.251.151.119
          142.251.150.119
          142.251.157.119
          142.251.154.119
          142.251.156.119
```

```
PS C:\Users\laksh> pathping

Usage: pathping [-g host-list] [-h maximum_hops] [-i address] [-n]
                [-p period] [-q num_queries] [-w timeout]
                [-4] [-6] target_name

Options:
    -g host-list      Loose source route along host-list.
    -h maximum_hops   Maximum number of hops to search for target.
    -i address        Use the specified source address.
    -n                Do not resolve addresses to hostnames.
    -p period         Wait period milliseconds between pings.
    -q num_queries    Number of queries per hop.
    -w timeout        Wait timeout milliseconds for each reply.
    -4                Force using IPv4.
```


8) ping


```
S C:\Users\laksh> ping

sage: ping [-t] [-a] [-n count] [-l size] [-f] [-i TTL] [-v TOS]
           [-r count] [-s count] [[-j host-list] | [-k host-list]]
           [-w timeout] [-R] [-S srcaddr] [-c compartment] [-p]
           [-4] [-6] target_name

ptions:
    -t             Ping the specified host until stopped.
                   To see statistics and continue - type Control-Break;
                   To stop - type Control-C.
    -a             Resolve addresses to hostnames.
    -n count       Number of echo requests to send.
    -l size        Send buffer size.
    -f             Set Don't Fragment flag in packet (IPv4-only).
    -i TTL         Time To Live.
    -v TOS         Type Of Service (IPv4-only. This setting has been deprecated
                   and has no effect on the type of service field in the IP
                   Header).
    -r count       Record route for count hops (IPv4-only).
    -s count       Timestamp for count hops (IPv4-only).
    -j host-list   Loose source route along host-list (IPv4-only).
    -k host-list   Strict source route along host-list (IPv4-only).
    -w timeout     Timeout in milliseconds to wait for each reply.
    -R             Use routing header to test reverse route also (IPv6-only).
                   Per RFC 5095 the use of this routing header has been
                   deprecated. Some systems may drop echo requests if
                   this header is used.
    -S srcaddr     Source address to use.
    -c compartment Routing compartment identifier.
    -p             Ping a Hyper-V Network Virtualization provider address.
    -4             Force using IPv4.
```

9) Route

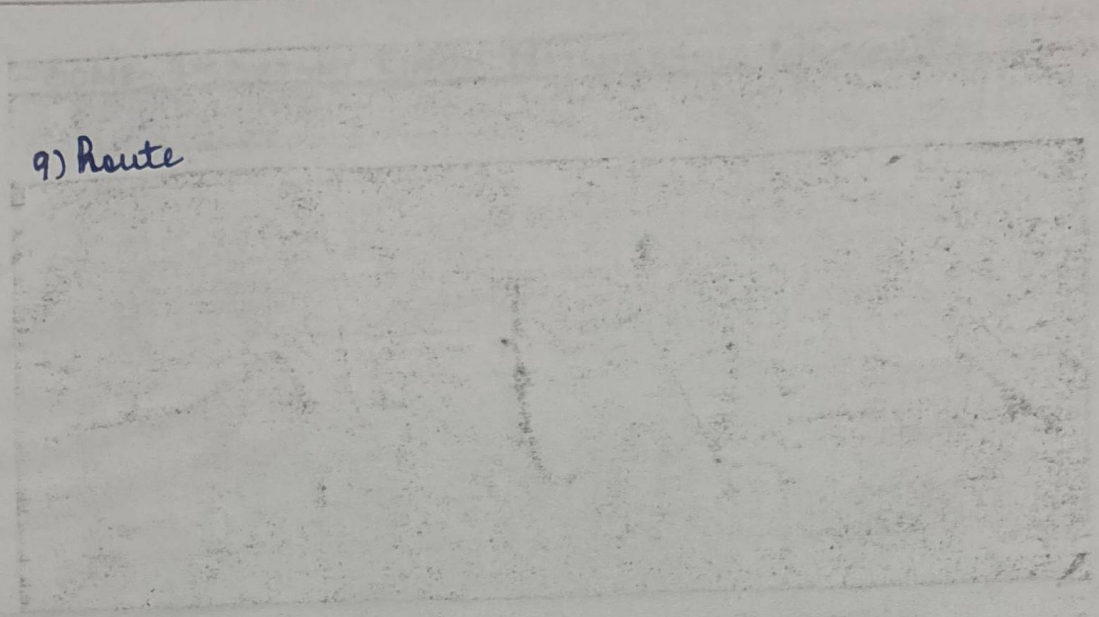

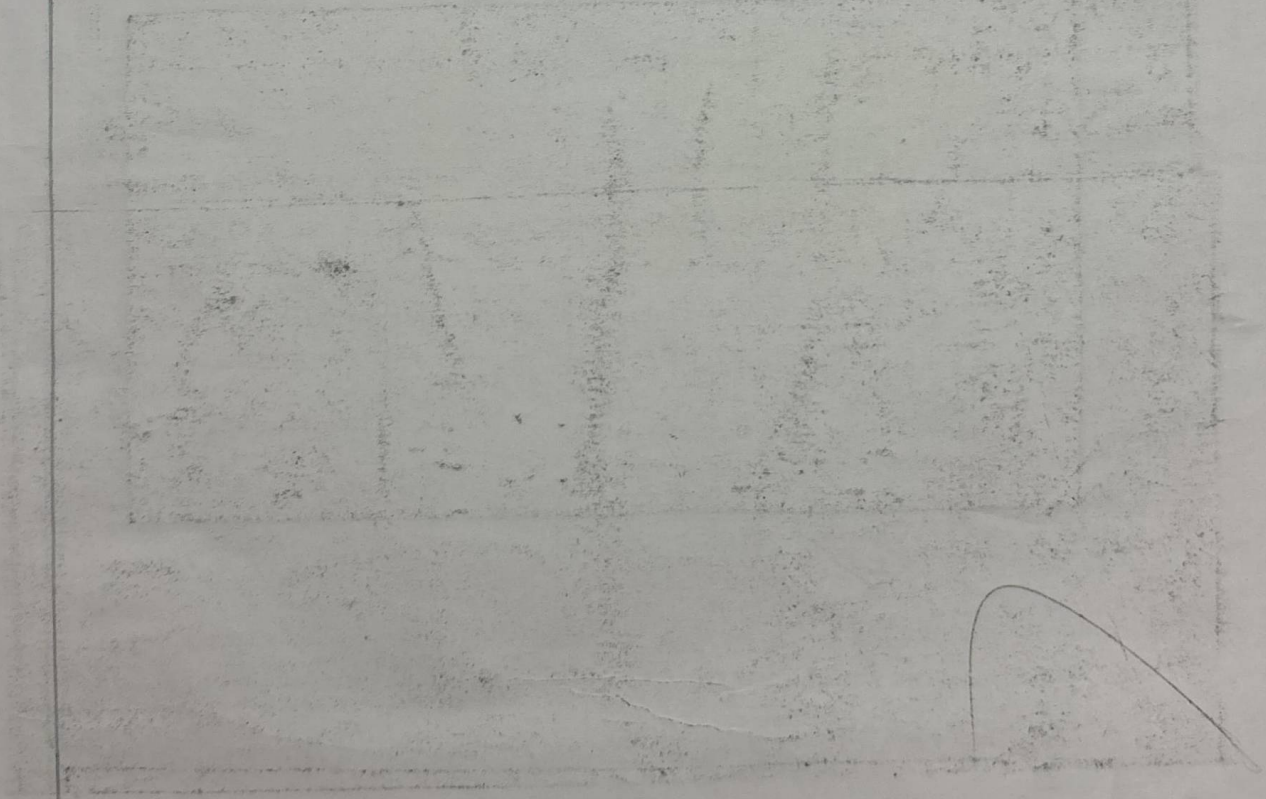

```
PS C:\Users\laksh> Route

Manipulates network routing tables.

ROUTE [-f] [-p] [-4|-6] command [destination]
                  [MASK netmask]  [gateway] [METRIC metric]  [IF interface]

  -f             Clears the routing tables of all gateway entries.  If this is
                 used in conjunction with one of the commands, the tables are
                 cleared prior to running the command.

  -p             When used with the ADD command, makes a route persistent across
                 boots of the system. By default, routes are not preserved
                 when the system is restarted. Ignored for all other commands,
                 which always affect the appropriate persistent routes.

  -4             Force using IPv4.

  -6             Force using IPv6.

  command        One of these:
                   PRINT     Prints  a route
                   ADD       Adds    a route
                   DELETE    Deletes a route
                   CHANGE    Modifies an existing route
  destination    Specifies the host.
  MASK           Specifies that the next parameter is the 'netmask' value.
  netmask        Specifies a subnet mask value for this route entry.
                 If not specified, it defaults to 255.255.255.255.
  gateway        Specifies gateway.
  interface      the interface number for the specified route.
  METRIC         specifies the metric, ie. cost for the destination.

All symbolic names used for destination are looked up in the network database
file NETWORKS. The symbolic names for gateway are looked up in the host name
database file HOSTS.

If the command is PRINT or DELETE. Destination or gateway can be a wildcard,
(wildcard is specified as a star '*'), or the gateway argument may be omitted.
If Dest contains a * or ?, it is treated as a shell pattern, and only
matching destination routes are printed. The '*' matches any string,
and '?' matches any one char. Examples: 157.*.1, 157.*, 127.*, *224*.

Pattern match is only allowed in PRINT command.
Diagnostic Notes:
    Invalid MASK generates an error, that is when (DEST & MASK) != DEST.
    Example> route ADD 157.0.0.0 MASK 155.0.0.0 157.55.80.1 IF 1
             The route addition failed: The specified mask parameter is invalid. (Destination & Mask) != Destination.

Examples:


    > route PRINT
    > route PRINT -4
    > route PRINT -6
    > route PRINT 157*            .... Only prints those matching 157*

    > route ADD 157.0.0.0 MASK 255.0.0.0  157.55.80.1 METRIC 3 IF 2
              destination^      ^mask      ^gateway     metric^    ^
                                                        Interface^
      If IF is not given, it tries to find the best interface for a given
      gateway.
     > route ADD 3ffe::/32 3ffe::1

     > route CHANGE 157.0.0.0 MASK 255.0.0.0 157.55.80.5 METRIC 2 IF 2

       CHANGE is used to modify gateway and/or metric only.

     > route DELETE 157.0.0.0
     > route DELETE 3ffe::/32
```




SOME IMPORTANT LINUX NETWORKING COMMANDS:

1) ip



2) ifconfig

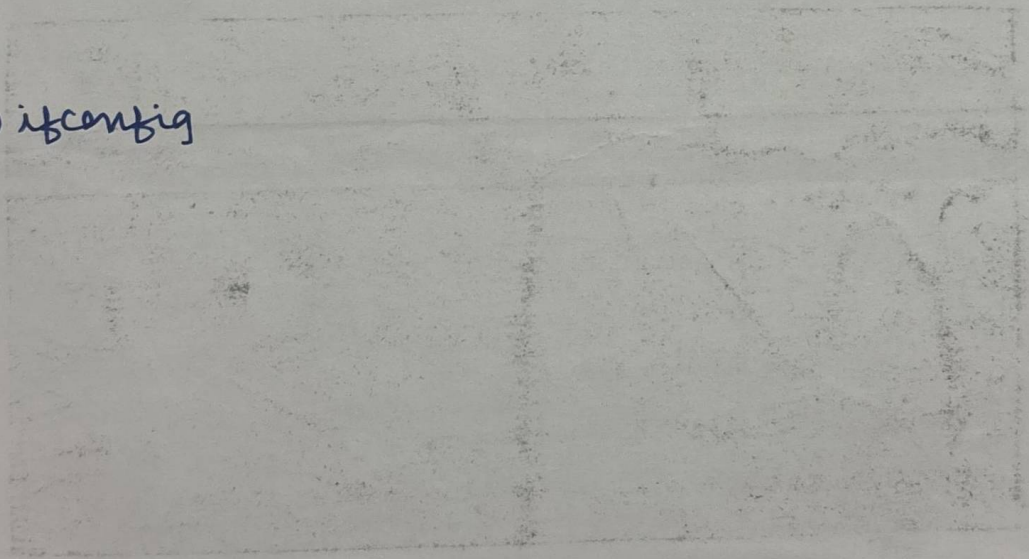

3) mtr

```
[user123@localhost ~]$ ip
Usage: ip [ OPTIONS ] OBJECT { COMMAND | help }
       ip [ -force ] -batch filename
where  OBJECT := { address | addrlabel | fou | help | ila | ioam | l2tp | link |
                   macsec | maddress | monitor | mptcp | mroute | mrule |
                   neighbor | neighbour | netconf | netns | nexthop | ntable |
                   ntbl | route | rule | sr | stats | tap | tcpmetrics |
                   token | tunnel | tuntap | vrf | xfrm }
       OPTIONS := { -V[ersion] | -s[tatistics] | -d[etails] | -r[esolve] |
                   -h[uman-readable] | -iec | -j[son] | -p[retty] |
                   -f[amily] { inet | inet6 | mpls | bridge | link } |
                   -4 | -6 | -M | -B | -0 |
                   -l[oops] { maximum-addr-flush-attempts } | -echo | -br[ief] |
                   -o[neline] | -t[imestamp] | -ts[hort] | -b[atch] [filename] |
                   -rc[vbuf] [size] | -n[etns] name | -N[umeric] | -a[ll] |
                   -c[olor]}
```

```
[user123@localhost ~]$ ifconfig
enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
        inet 10.0.2.15  netmask 255.255.255.0  broadcast 10.0.2.255
        inet6 fe80::a00:27ff:fe03:e254  prefixlen 64  scopeid 0x20<link>
        ether 08:00:27:03:e2:54  txqueuelen 1000  (Ethernet)
        RX packets 38  bytes 4682 (4.5 KiB)
        RX errors 0  dropped 0  overruns 0  frame 0
        TX packets 75  bytes 7876 (7.6 KiB)
        TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING>  mtu 65536
        inet 127.0.0.1  netmask 255.0.0.0
        inet6 ::1  prefixlen 128  scopeid 0x10<host>
        loop  txqueuelen 1000  (Local Loopback)
        RX packets 17  bytes 2062 (2.0 KiB)
        RX errors 0  dropped 0  overruns 0  frame 0
        TX packets 17  bytes 2062 (2.0 KiB)
        TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0
```

```
[user123@localhost ~]$ mtr
```

user123@localhost:~ — mtr

```
                 My traceroute  [v0.94]
localhost.localdomain (::1) -> localhost                2026-07-24T19:11:29+0530
Keys:  Help   Display mode   Restart statistics   Order of fields   quit
                              Packets                    Pings
Host                       Loss%   Snt   Last   Avg  Best  Wrst StDev
1. localhost                0.0%     4    0.1   0.1   0.1   0.1   0.0
```

4) tcpdump

5) ping

RESULT:

Thus, the study and implementation of various network commands used in Linux & Windows has been successfully executed & verified.

```
[user123@localhost ~]$ tcpdump -i enp0s3 -c 10
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on enp0s3, link-type EN10MB (Ethernet), capture size 262144 bytes

11:42:10.123456 IP 192.168.1.10.53422 > 8.8.8.8.53: 12345+ A? www.google.com. (32)
11:42:10.123789 IP 192.168.1.10.53422 > 8.8.8.8.53: 12345+ AAAA? www.google.com. (32)
11:42:10.156789 IP 8.8.8.8.53 > 192.168.1.10.53422: 12345 1/0/0 A 142.250.183.36 (48)
11:42:10.157012 IP 8.8.8.8.53 > 192.168.1.10.53422: 12345 1/0/0 AAAA 2404:6800:4009:80c::2004 (80)
11:42:10.234567 IP 192.168.1.10.50120 > 142.250.183.36.443: Flags [S], seq 123456789, win 64240, length 0
11:42:10.245678 IP 142.250.183.36.443 > 192.168.1.10.50120: Flags [S.], seq 987654321,
                ack 123456790, win 65535, length 0
11:42:10.245789 IP 192.168.1.10.50120 > 142.250.183.36.443: Flags [.], ack 1, win 64256, length 0
11:42:10.300123 IP 192.168.1.10.50120 > 142.250.183.36.443: Flags [P.], seq 1:518, ack 1,
                win 64256, length 517
11:42:10.312345 IP 142.250.183.36.443 > 192.168.1.10.50120: Flags [.], ack 518, win 65535, length 0
11:42:10.400456 IP 142.250.183.36.443 > 192.168.1.10.50120: Flags [P.], seq 1:1461, ack 518,
                win 65535, length 1460
11:42:10.412567 IP 192.168.1.10.50120 > 142.250.183.36.443: Flags [.], ack 1461, win 64256, length 0

10 packets captured
10 packets received by filter
0 packets dropped by kernel

[user123@localhost ~]$ tcpdump -i  lo  -c 10
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on lo, link-type EN10MB (Ethernet),  capture size 262144 bytes
11:45:22.111111 IP localhost.54876 > localhost.35308: Flags [S],  seq 123456789, win 65495, length 0
11:45:22.111222 IP localhost.35308 > localhost.54876: Flags [S.],  seq 987654321,  ack 123456790,
                win 65483, length 0
11:45:22.111333 IP localhost.54876 > localhost.35308: Flags [.], ack 1, win 65495, length 0
11:45:22.111444 IP localhost.54876 > localhost.35308: Flags [P.],  seq 1:65, ack 1, win 65495, length 64
11:45:22.111555 IP localhost.35308 > localhost.54876: Flags [.], ack 65, win 65483, length 0
11:45:22.111666 IP localhost.35308 > localhost.54876: Flags [P.],  seq 1:65, ack 65, win 65483, length 64
11:45:22.111777 IP localhost.54876 > localhost.35308: Flags [.], ack 65, win 65495, length 0
11:45:22.111888 IP localhost.54876 > localhost.35308: Flags [F.],  seq 65,  ack 65, win 65495, length 0
11:45:22.111999 IP localhost.35308 > localhost.54876: Flags [F.],  seq 65,  ack 66, win 65483, length 0
11:45:22.112000 IP localhost.54876 > localhost.35308: Flags [.], ack 66, win 65495, length 0
10 packets captured
10 packets received by filter
0 packets dropped by kernel
[user123@localhost ~]$
```

```
[user123@localhost ~]$ ping
ping: usage error: Destination address required
[user123@localhost ~]$ ping google.com
PING google.com (192.178.158.100) 56(84) bytes of data.
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=1 ttl=100 time=41.8 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=2 ttl=100 time=41.4 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=3 ttl=100 time=41.1 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=4 ttl=100 time=41.1 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=5 ttl=100 time=40.9 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=6 ttl=100 time=42.7 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=7 ttl=100 time=41.5 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=8 ttl=100 time=42.3 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=9 ttl=100 time=42.4 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=10 ttl=100 time=40.9 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=11 ttl=100 time=41.1 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=12 ttl=100 time=42.1 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=13 ttl=100 time=41.3 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=14 ttl=100 time=41.0 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=15 ttl=100 time=41.7 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=16 ttl=100 time=41.9 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=17 ttl=100 time=41.2 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=18 ttl=100 time=42.2 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=19 ttl=100 time=42.0 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=20 ttl=100 time=41.4 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=21 ttl=100 time=40.6 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=22 ttl=100 time=40.5 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=23 ttl=100 time=41.4 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=24 ttl=100 time=40.7 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=25 ttl=100 time=42.4 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=26 ttl=100 time=40.6 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=27 ttl=100 time=41.2 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=28 ttl=100 time=41.7 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=29 ttl=100 time=44.4 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=30 ttl=100 time=42.6 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=31 ttl=100 time=42.9 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=32 ttl=100 time=41.2 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=33 ttl=100 time=41.7 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=34 ttl=100 time=41.0 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=35 ttl=100 time=40.4 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=36 ttl=100 time=41.6 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=37 ttl=100 time=42.4 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=38 ttl=100 time=40.7 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=39 ttl=100 time=54.6 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=40 ttl=100 time=43.3 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=41 ttl=100 time=41.0 ms
64 bytes from lcdels-in-f100.1e100.net (192.178.158.100): icmp_seq=42 ttl=100 time=42.4 ms
```