


SWE4004 · CLOUD COMPUTING AND APPLICATIONS

RoadAssist Bharat

AI-Powered · Cloud-Connected · Network-Resilient
Emergency Mobility Platform

"RoadAssist doesn't stop when the network stops."

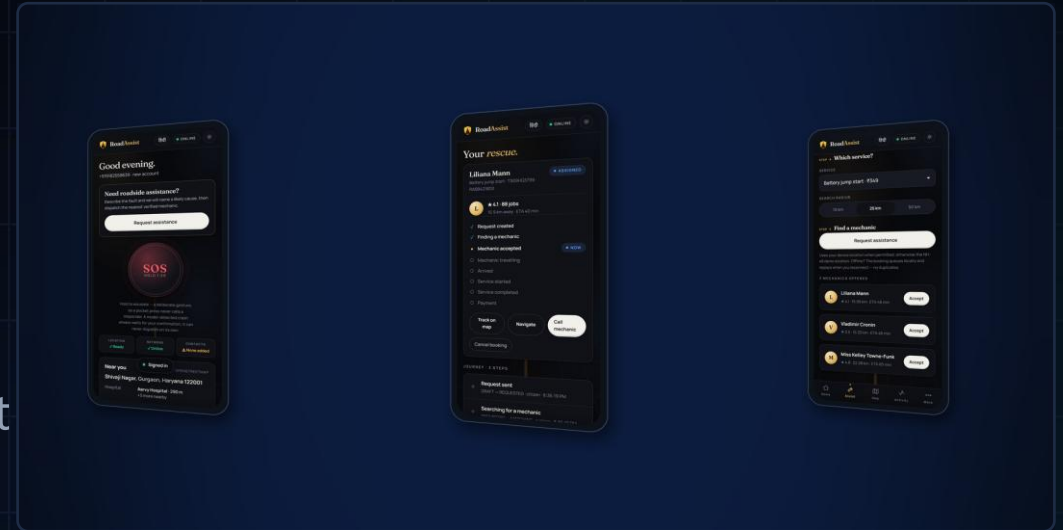

TEAM

V. Saatwik Sairam · P. Sai Nirisha Chowdary

T. V. S. Jignesh · G. Parthavi

FACULTY

Dr. Nagendra Panini Challa

INSTITUTION

VIT-AP University

THE PROBLEM

A breakdown is not a software problem

...until you realise the app you would use to fix it needs the network you do not have.

21:40

A Swift stops on NH-48. Two hundred kilometres from home, one bar of signal.

21:41

The driver opens a roadside-assistance app. It shows a spinner.

21:44

Still a spinner. There is no way to tell whether anything was sent.


21:52

They give up and start calling numbers from a sticker on the windscreen.

WHAT ACTUALLY FAILS

- Coverage is worst exactly where breakdowns are most dangerous
- No way to know if a request was sent
- No centralised incident record
- Response time is unmeasured, so it cannot be improved

One platform, from incident to resolution

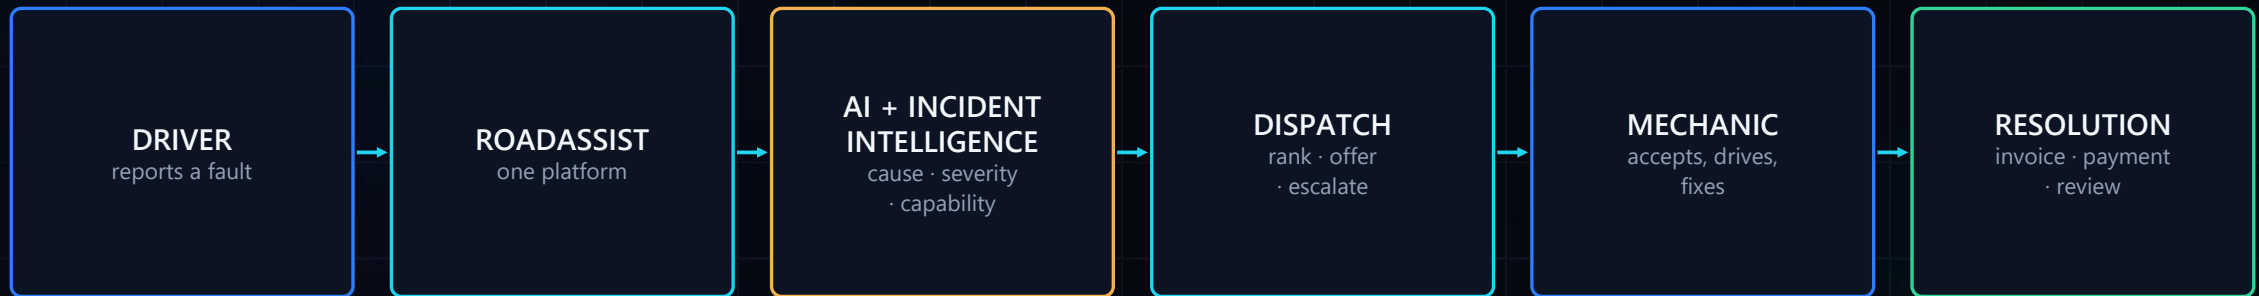

Every step is real application state. No manual database editing anywhere in the normal workflow.

Six things, and one that matters most

AI-ASSISTED DIAGNOSIS

Rules engine, explainable,
same table on device and cloud

DYNAMIC DISPATCH

Ranked, wave-based,
busy providers excluded

REAL-TIME TRACKING

Server-sent events,
measured at 65 ms

SECURE PAYMENTS

Server-side amount,
signature-verified webhook

INCIDENT INTELLIGENCE

Severity, capability,
tamper-evident audit


OFFLINE-FIRST EMERGENCY

SOS with no network,
stored and forwarded

“RoadAssist doesn't stop when the network stops.”


System architecture

One container, one PostGIS database — live on Render + Neon in Singapore. Everything external is behind an adapter.

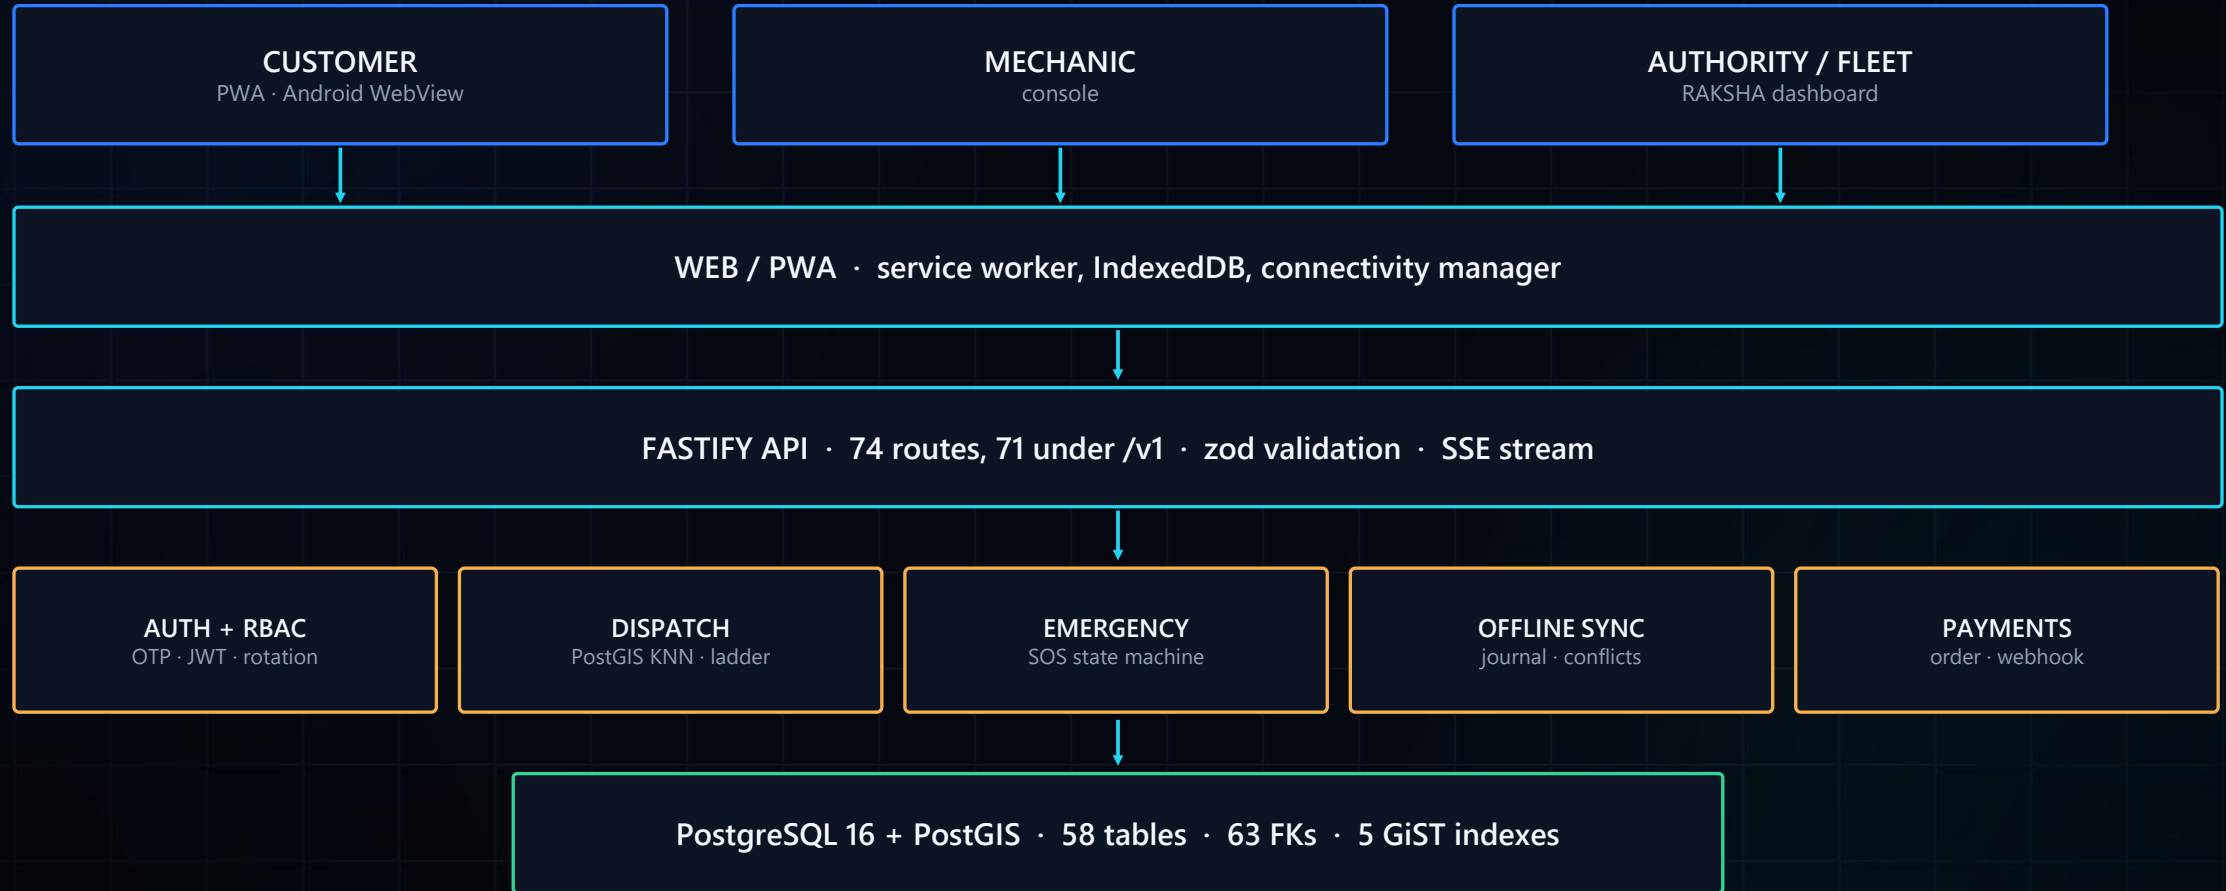

NEW · MODELLED IN BLENDER · DRAWN WITH THREE.JS · FED BY THE RUNNING PLATFORM

Every layer, live in 3D

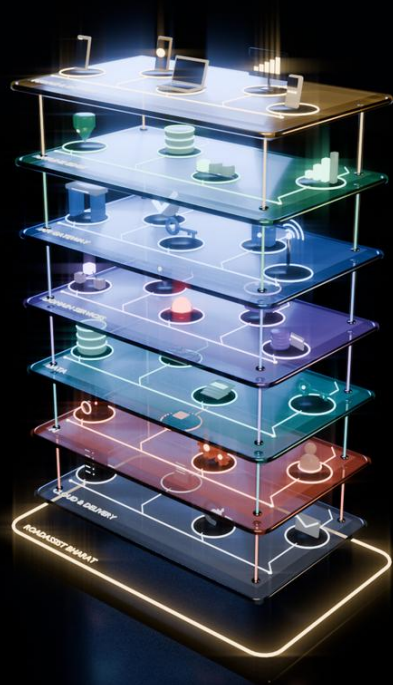

app.roadassistbharat.online/layers.html

IMPLEMENTED

- Modelled in Blender 5.2 by a script: 7 layers, 31 parts, each a model of what it stands for; Draco-compressed to 595 KB
- Drawn in the browser with three.js: bloom, reflections, turn it any way, zoom, arrow keys
- Live every 8 s: API round trip, database latency, detections and corridor health
- Three journeys, step by step: a booking, an SOS with no signal, RAKSHA finding a pothole
- Embedded on the project site, the app home and the showcase; opens inside the Android app
- Honest labels: the moving packets are illustration; detection positions are simulated

Two paths, and the second one is the product



The connectivity manager decides which path runs — ONLINE, LIMITED or OFF-GRID — from measured evidence, never from navigator.onLine alone.

Off-grid SOS

No internet does not mean the emergency workflow disappears. It means it runs here instead.



WHAT THE USER IS TOLD

OFF-GRID SOS CREATED


No network connection detected.

Your emergency information is stored securely on this device and will be synchronized automatically when connectivity returns.

"Nothing has been transmitted."

We never claim emergency services were contacted; the ERSS 112 handoff is a stub. One tap dials 112, 1033 (NHA) or 108. Text my location opens the SMS app; the user presses Send.

Diagnosis: rules first, model optional

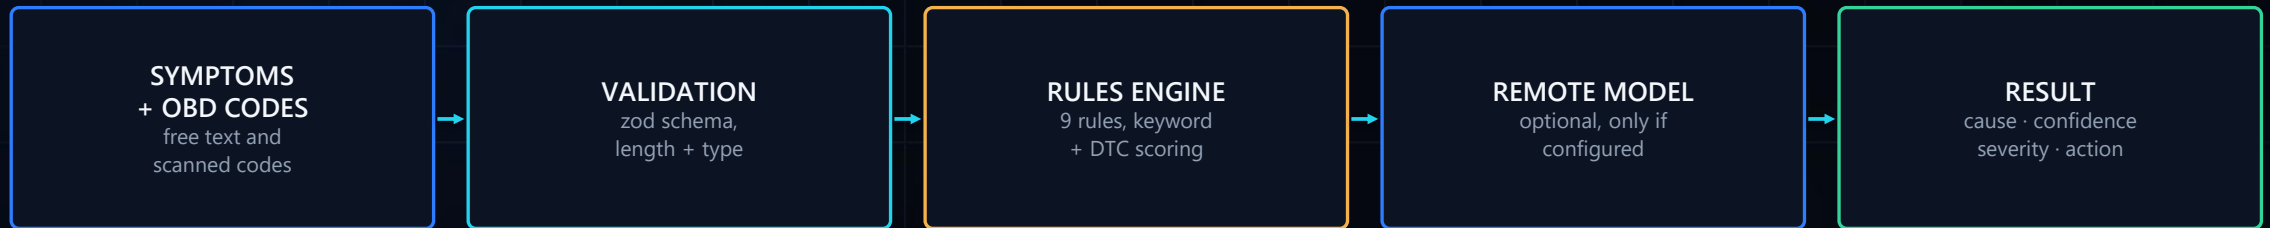

THE SAFETY ASYMMETRY

A model may make a drivability verdict STRICTER. It can never make one laxer.

The rules result is always computed. A remote answer is used only if it clears AI_MIN_CONFIDENCE and does not contradict the rules on safety.

STATED PLAINLY

This is a deterministic rules engine, not machine learning. The UI labels it "rules-1.0.0", and "LOCAL OFFLINE DIAGNOSIS" on the device.

Trained models DO exist — YOLO11 for road damage: best run YOLO11s, mAP50 0.472; RAKSHA's demo detections come from a YOLO11n, mAP50 0.443. Both measured.

EXPLAINABLE, NOT OPAQUE

Incident intelligence

Every field below is derived from a rule you can read, not from a weighting nobody can inspect.



EXPLAINABLE

“Battery discharged or terminals loose” — because these keywords matched, at this confidence

AUDITABLE

Every prediction writes a model_predictions row: capability, version, confidence, latency, input HASH (never the text)

HONEST

Below 55% confidence the UI says so: “At 42% this is a suggestion, not a finding”

NEVER FABRICATED

No ETA unless a provider is travelling. No location unless GPS returned one.

Dispatch is dynamic scheduling

Work assigned at run time from a pool, by a score computed from live state, with timeout-driven re-scheduling.



THE BUG THIS AUDIT FOUND

Dispatch filtered on `is_available` alone — a duty toggle meaning “I am working today”, not “I am free now”. A mechanic already driving to one breakdown kept receiving offers for the next.

Fixed: provider state is DERIVED from live data.


PROVIDER STATES

OFFLINE	off duty — never offered
AVAILABLE	free — offerable
OFFERED	holding an offer — still offerable
BUSY / EN_ROUTE / ON_JOB	committed — never offered

Two guarded state machines

A client sends a command; only the transition table decides whether it is legal. Every change writes a timestamped event row.

BOOKING — 13 states, 15 commands **EMERGENCY — ADR-0005 in code**

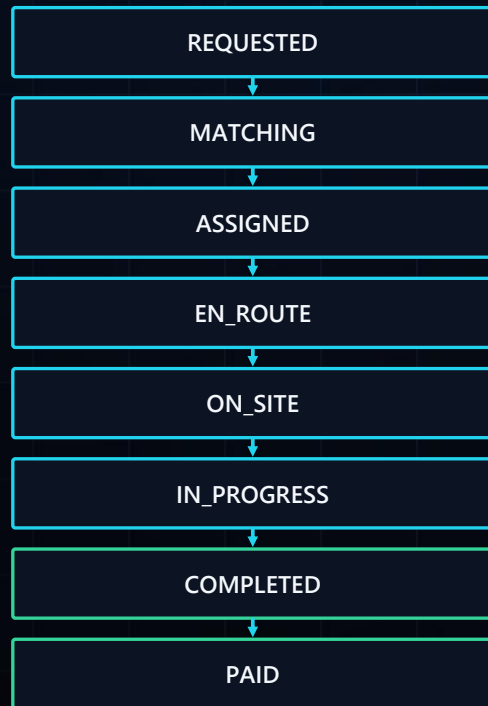

THE RULE THAT IS ENFORCED


A model raises a SIGNAL. A human confirms an INCIDENT.

“escalate” is reachable only from CONFIRMED. There is no path from a model-detected crash to a dispatched responder that does not pass through a person.


That is one line in a transition table, and it is unit-tested.

Real-time, but never the source of truth


Server-sent events over one long-lived GET. Persist first, publish second — always.

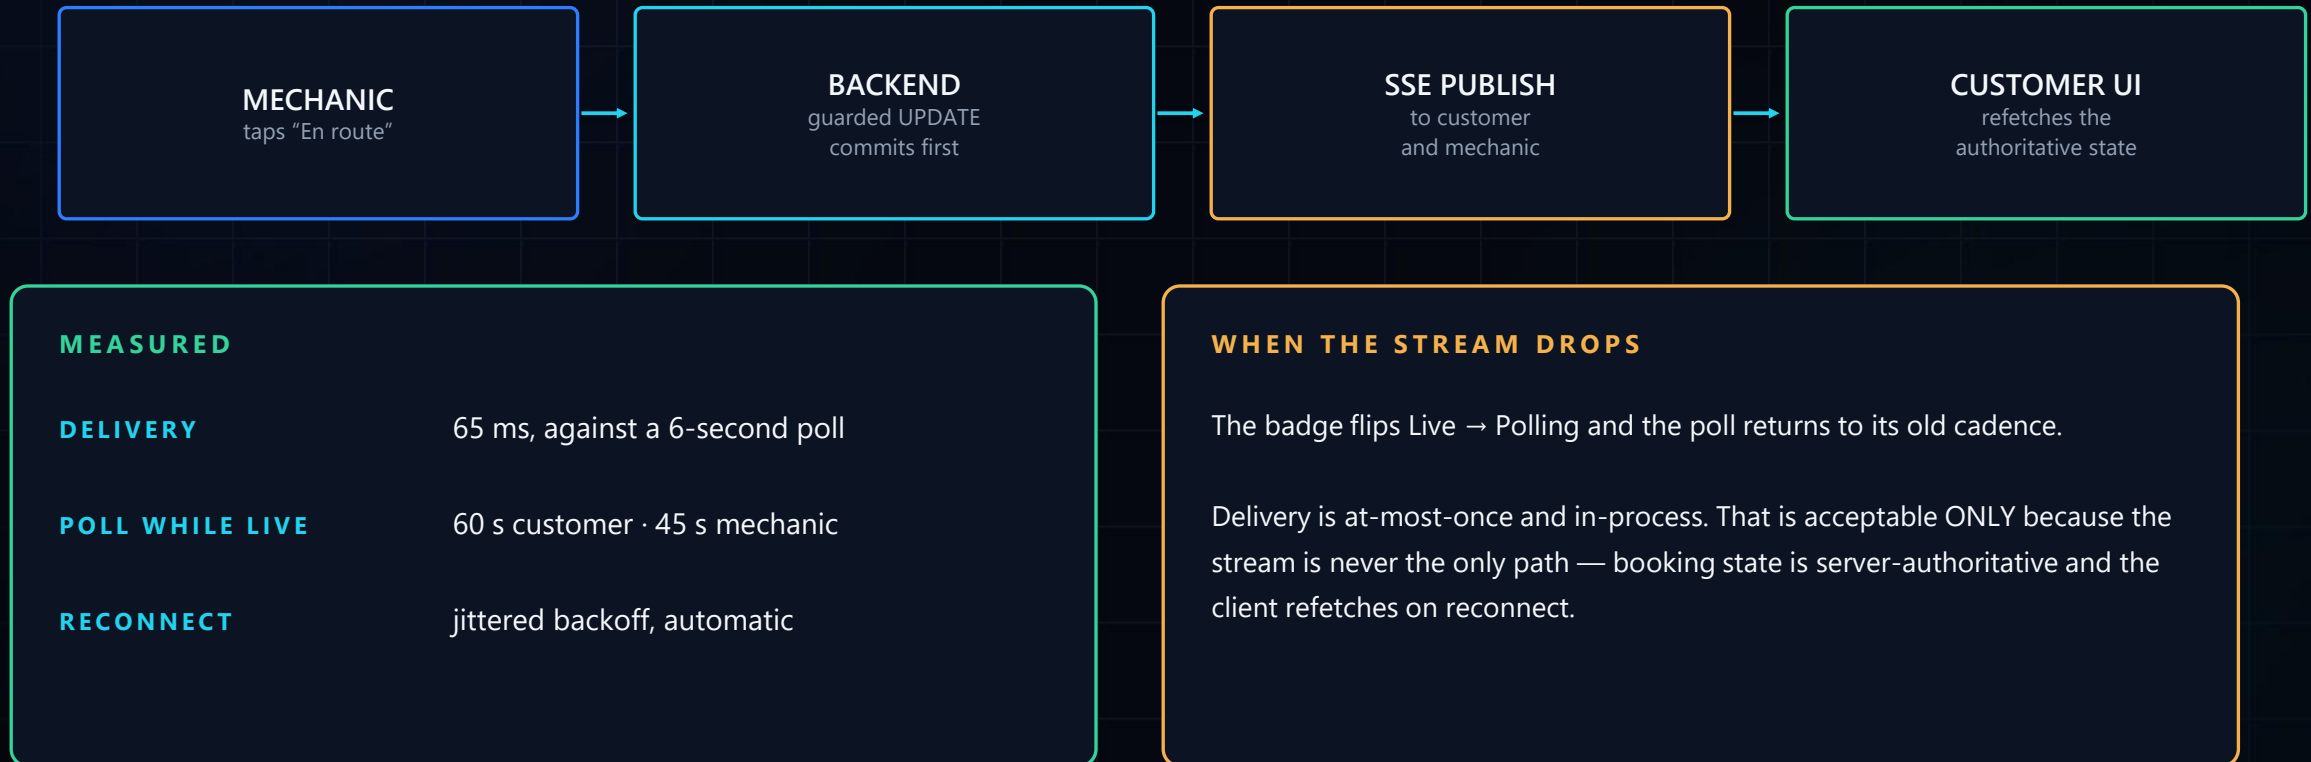


Customer application

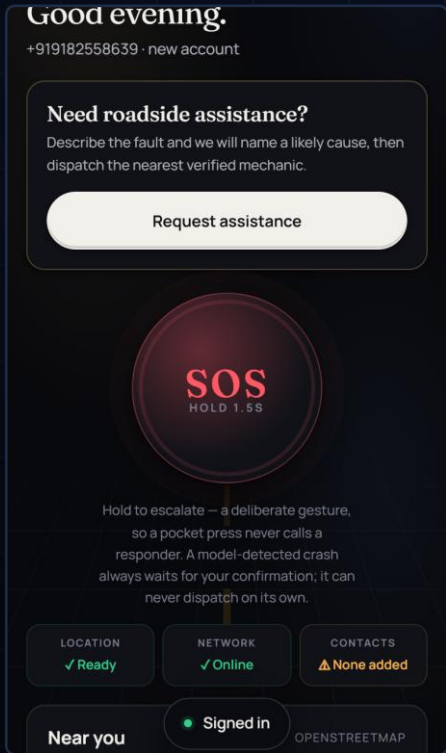


Home · SOS + readiness

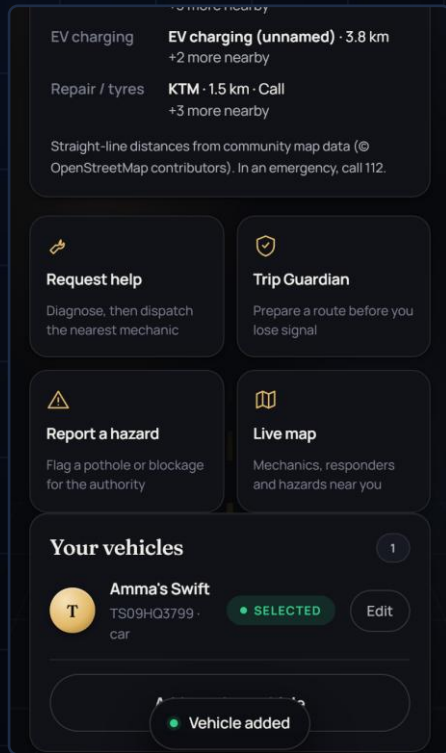


Vehicle

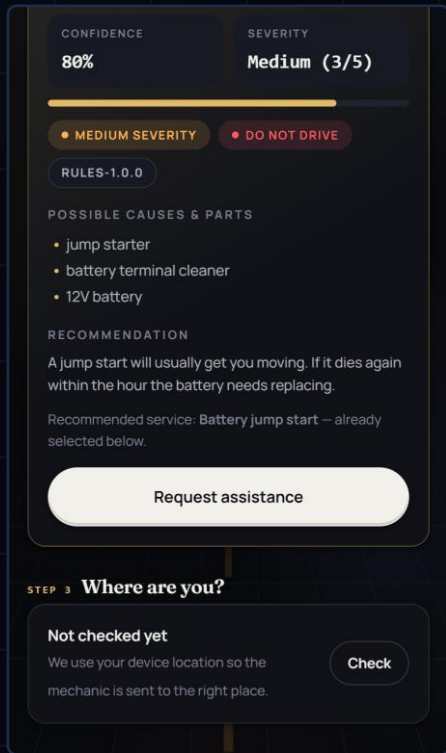

Diagnosis

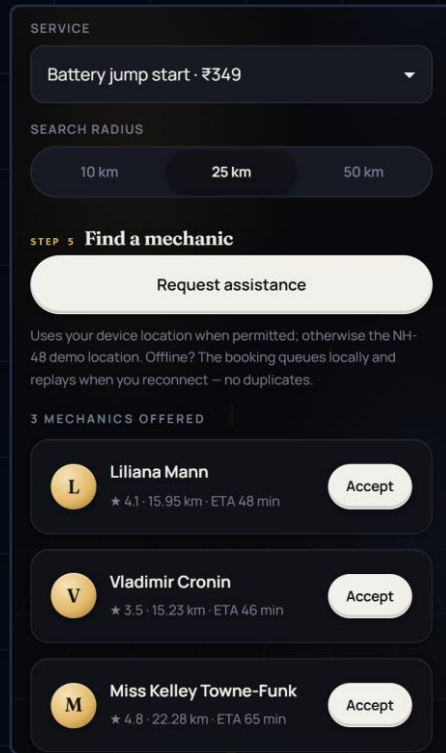


Dispatch

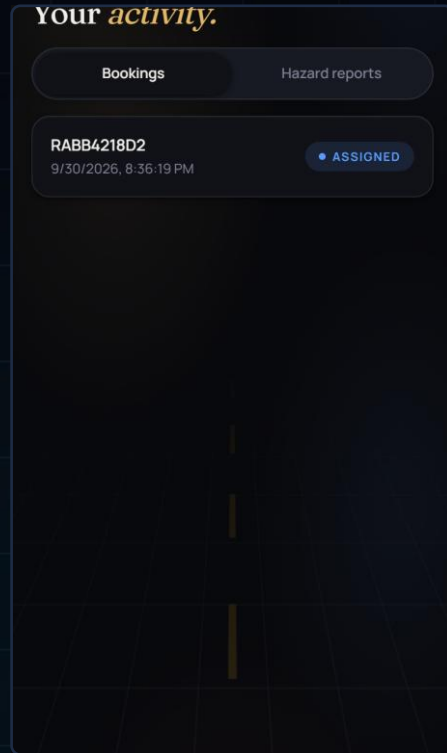


Activity

Captured by scripts/capture-screens.mjs against the live API — regenerable in ninety seconds, so they cannot drift from the product.

Mechanic console and authority dashboard

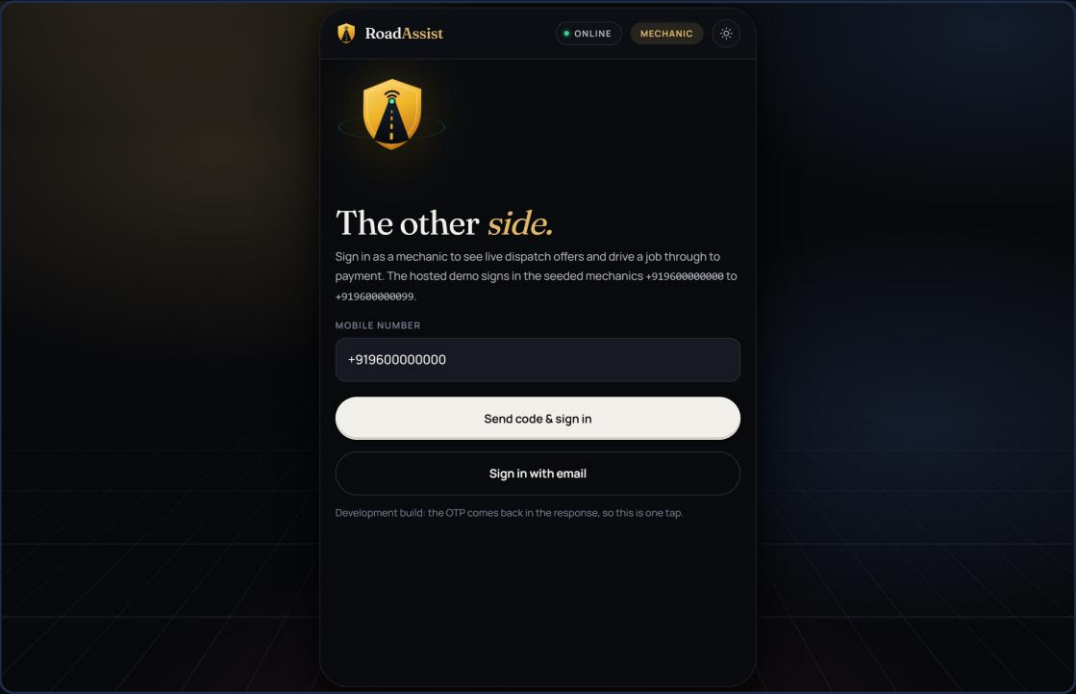

Mechanic console · dispatch inbox, live badge, job lifecycle
Mechanic: availability · incoming request · accept · decline · en route · arrived · in service · complete — every transition persisted and pushed to the customer.

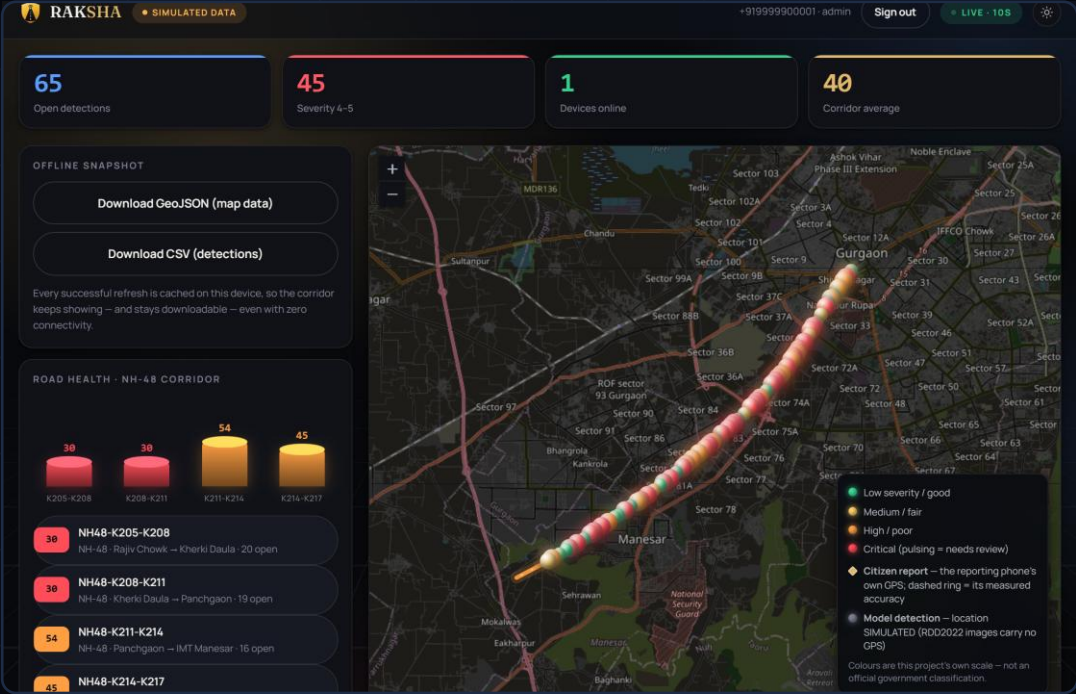

Location services from open data

Near you

OpenStreetMap

Sohna Road, Shivaji Nagar, Gurgaon, Haryana 122001

Hospital

Aarvy Hospital · 290 m

Also nearby: 3

Police

Commissioner Of Police · 540 m

Also nearby: 3

Fuel

IBP Petrol Station · 520 m

Also nearby: 3

EV charging

EV charging (unnamed) · 3.8 km

Also nearby: 2

Repair / tyres

KTM · 1.5 km

Also nearby: 3

Call

Android · the Near you card on the emulator, real OpenStreetMap data

WHAT IT ANSWERS

NEAR YOU · WEB AND ANDROID

Nearest address; the nearest hospital, police, fuel, EV charger and repair shop. Call only where the map has a number, and call 112 under every result.

TRACKING CARD

Road distance and time beside the straight-line figure, labelled as no live traffic.

RAKSHA CORRIDOR

Lowest visibility, US AQI at both ends (smog flagged above 150), magnitude 4+ earthquakes in the last 7 days.

PRIVACY, BY DESIGN

- Server-side only: the page calls this platform, so no visitor's IP reaches a provider
- Coarsened first: about 110 m for an address or route, about 1 km for a search
- Cached (10 min to 24 h) and paced to about one request a second
- Off in development, test and CI: no test run calls a donated service
- Five hosts declared, all outside India: a stated exception to “no PII leaves India”

SAMPLE LOOKUP AT THE NH-48 DEMO POINT · MEASURED IN TESTING

Sector 12, Gurgaon, Haryana 122001

Aarvy Hospital · 290 m

Road 28.4 km · 33 min

US AQI 195 · Unhealthy

Community map data: a place can be missing or closed, and the card says to call before relying on it. Dispatch still ranks by PostGIS distance; the road time decides nothing.


RAKSHA: the frame the model saw



India_000914 · 3 road damage, 1 pothole



India_000053 · road damage 0.89, pothole 0.41

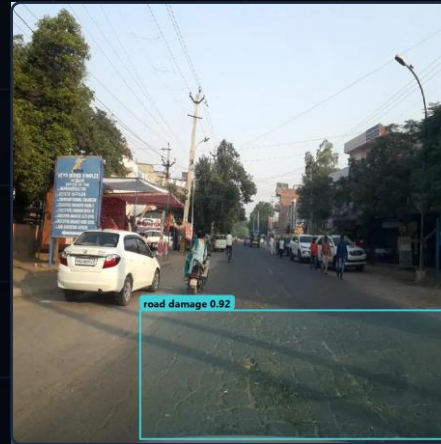

India_000970 · road damage 0.92

HOW THE FRAMES WERE MADE

46

RDD2022 India frames

65 / 65

live detections matched

0

unmatched

render_frames.py re-runs the SAME weights (runs/runs/full) on the images behind the live detections and keeps only boxes whose class and confidence match a listed one. An unmatched detection fails the run.

ON THE DASHBOARD

HAZARD PHOTOS

A gallery of the frames and citizen photos, and a photo tile on each detection.

THE VIEWER

Full screen, with the dataset credit (Arya et al., CC BY-SA 4.0) and "location SIMULATED": RDD2022 images carry no GPS.


MAP POPUPS

Each detection's popup shows its frame and opens the same viewer.


DISMISS AS FALSE POSITIVE

Admin or officer only, with a written reason, recorded in the audit chain. It is the state machine's cancel: it closes, never dispatches (ADR-0011).


The Android app, on the emulator

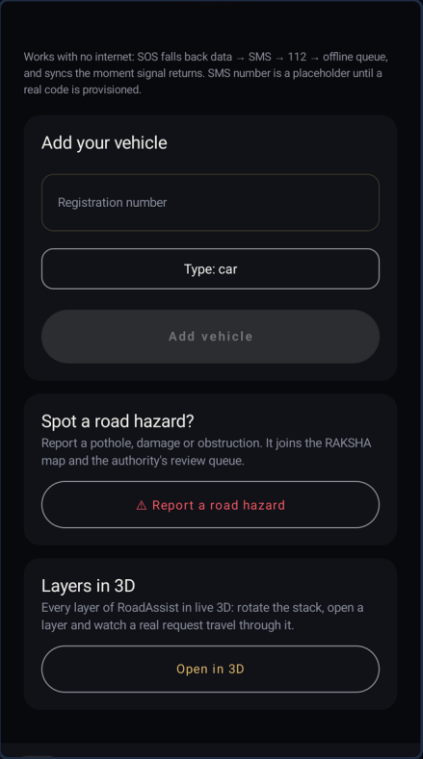


Home · the new Layers in 3D card

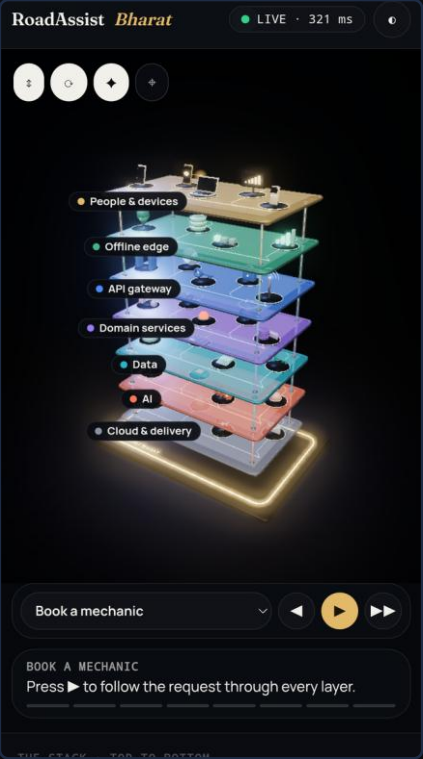

Layers in 3D · live, in a WebView

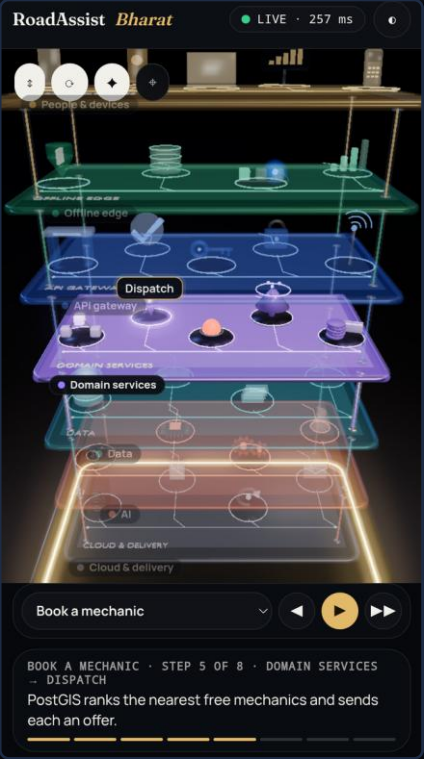

A journey playing · step 5 of 8

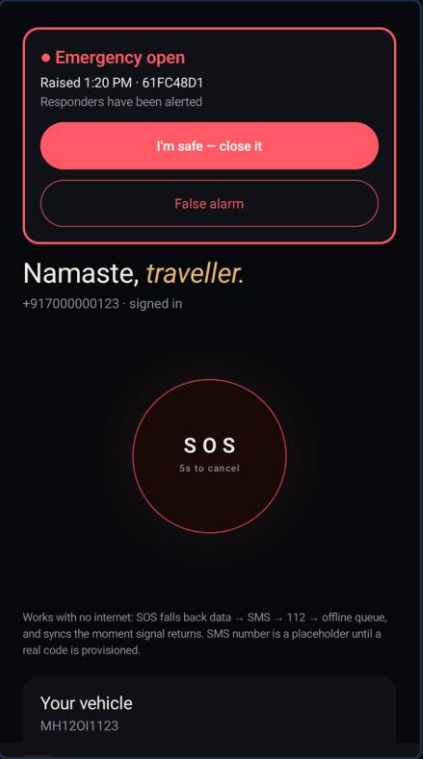

An open emergency, found after a restart

179 Android unit tests · 0 lint errors · 8 languages · the emergency card is shown against a local test server

Three states, three honest answers

ONLINE

- Everything works
- SOS reaches dispatch
- Live tracking + ETA
- Cloud diagnosis

LIMITED


- Requests still attempted
- Anything that fails is STORED
- Slow or flaky path
- User is told it is weak

OFF-GRID

- SOS stored on device
- GPS still works
- Local diagnosis
- Cached maps · no live anything

The indicator names the state in WORDS as well as colour — status is never carried by tint alone.
Under every state the primary action stays the same and stays one tap away: SOS.

The client never decides that money arrived

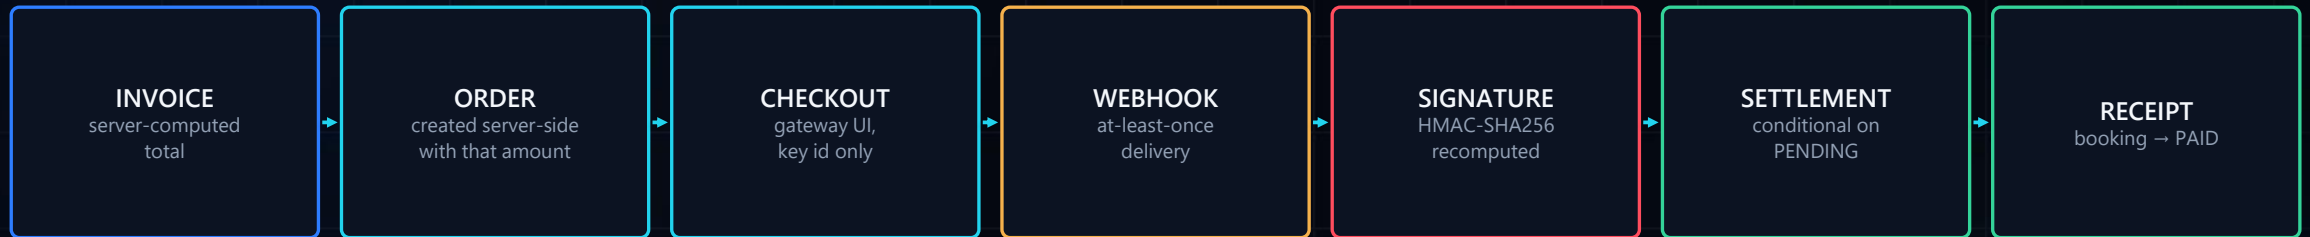

AMOUNT

Never taken from the request — it is the invoice total, and the webhook refuses a mismatch

TWO PATHS

Browser callback AND webhook. The webhook is the one that matters: a customer can pay and close the tab

IDEMPOTENT

Delivery is at-least-once, so a replayed webhook settles nothing twice

REFUSES TO BOOT

Production will not start on a real gateway with no webhook secret


CHECKED, NOT COUNTED

22 checks against a local stub of Razorpay's API, no account: forged signature, replay, wrong amount — outside the 1137

NINE LAYERS, AND 106 ATTACKS THAT FAIL

Security

Refreshed by the September 2026 hardening pass. The suite passes when the platform refuses.

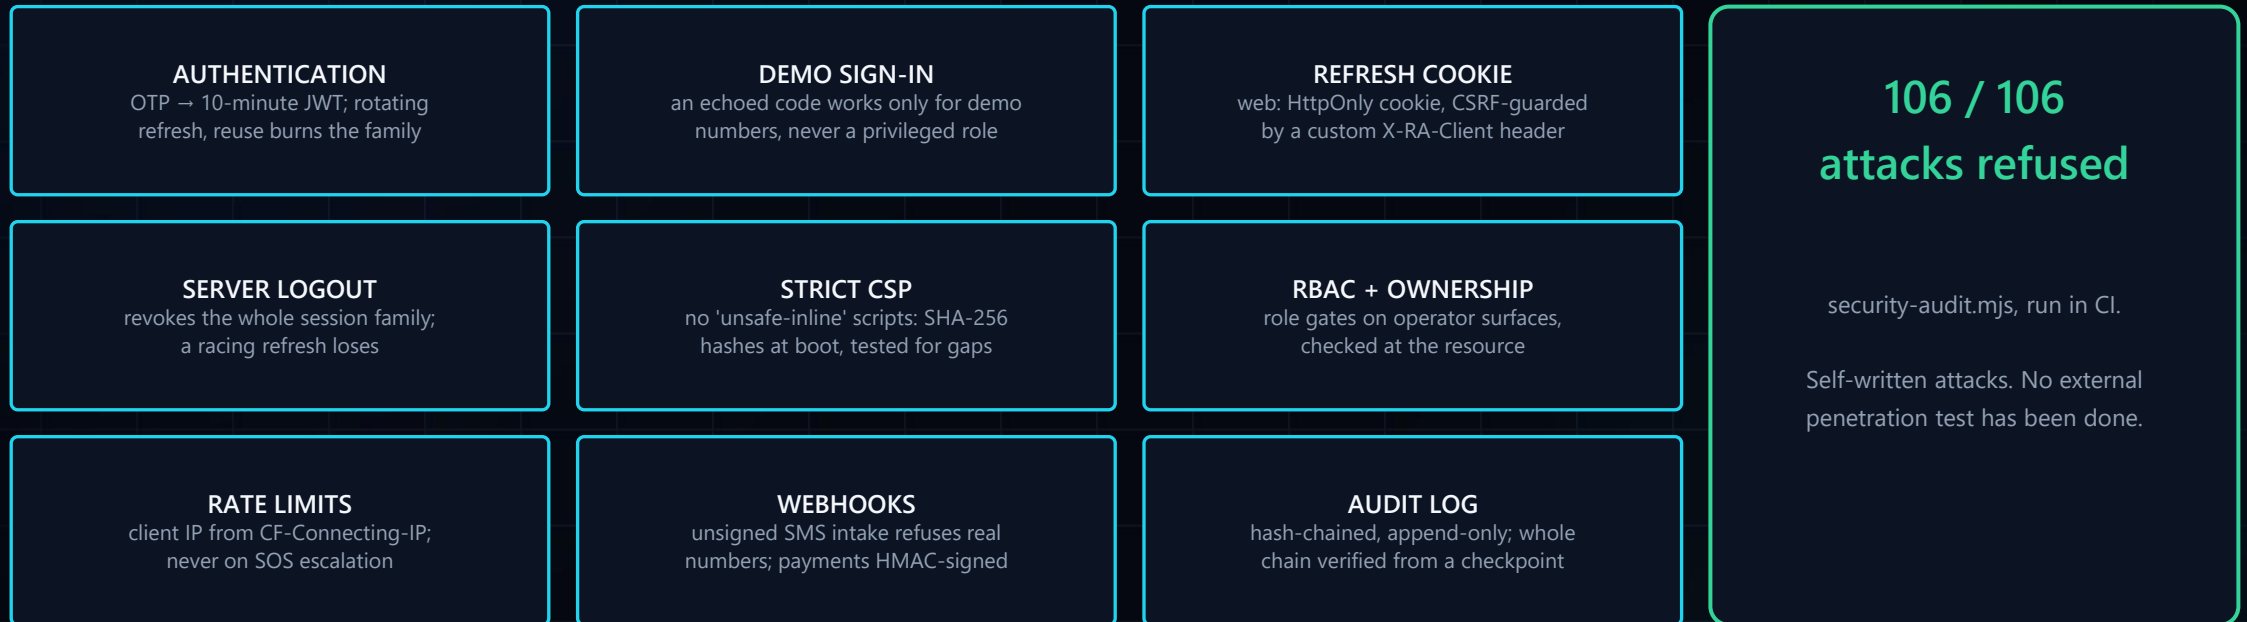

Every source file, the Git history and the live hosts were searched for secrets first: none found; /.env, /.git/config and source maps answer 404.

Medical break-glass needs a role, a LIVE incident and a written reason, and writes a tamper-evident row. Logs redact codes, numbers and coordinates.

Still open, and said so: the 10-minute access token sits in sessionStorage, and style-src keeps 'unsafe-inline'.

EACH NEW TEST FAILS ON THE OLD CODE AND PASSES ON THE NEW

Found in the recheck, and proved

WHAT WAS WRONG	BEFORE	AFTER
Two dispatches of one booking at the same instant	both sent a wave · 200, 200, 409	per-booking try-lock: one wins, the rest 409
An SMS SOS recorded a "contacts alerted" step	texted nobody	texts through the confirm guards, count recorded
The audit check re-verified only the oldest 2,000–5,000 rows	still said "intact"	whole chain from a checkpoint, range stated
A device's image reference, joined to the upload folder	could read and delete files outside it	refused
Sign-out while a refresh was in flight	session survived · 8 of 8	session ended
Break-glass response to the responder	always "the subject has been notified"	sent · opted out · failed · no number

Also fixed: STOP/START opt-out is actually stored and honoured, a cancelled booking withdraws its open offers, the five-contact cap no longer races past five, hazard photos no longer always answer 401 for citizens, and the Android Near you card no longer goes stale after a location-permission grant.

PostgreSQL 16 + PostGIS

Chosen for one query, and kept for four more reasons.

58

tables

63

foreign keys

142

indexes

5

GiST spatial

7

check constraints

9

migrations

WHY POSTGIS

"nearest available mechanic to this point" is ONE indexed query with ST_DWithin doing true metres-on-a-sphere. Without it: fetch every mechanic and compute haversine in app code.

WHY RELATIONAL

SELECT ... FOR UPDATE is what stops two mechanics taking one job. Transactions are the feature, not a formality.

CONSTRAINTS

client_incident_id UNIQUE is the entire duplicate-emergency defence. Money is integer paise; ratings are CHECK 1–5.

AUDITABILITY

audit_log is hash-chained and Postgres RULES block UPDATE and DELETE — an admin cannot quietly edit it.

VERIFIED

Migrations run from an EMPTY database in this audit, then the full suite. Backup + restore rehearsed: chain intact across 639 entries.

Where we sit in the cloud

We are a consumer of IaaS and PaaS, and a provider of SaaS to three user classes.

SaaS

We PROVIDE this: citizen app,
mechanic console, authority dashboard

IMPLEMENTED

PaaS

We CONSUME managed Postgres (Neon)
+ a container platform (Render)

IMPLEMENTED

IaaS

Compute, network, storage.
Compose is the local stand-in

PARTIAL

CHARACTERISTICS WE ACTUALLY EXHIBIT

Broad network access — one API serves a browser, an installed PWA, an Android WebView and a feature phone over SMS.
Resource pooling — dispatch pools providers and allocates on demand.

DEPLOYMENT MODEL

Public cloud. Demo: Render + Neon in Singapore — the free tiers offer no India region. Production target: an Indian region, because “No PII leaves India” — logs, backups and crash reports included.

MODULE 2

Enabling technologies

Five topics. Four are genuinely built; one is partial and says so.

Data centre

Compose stack: PostGIS + Redis + Redpanda on a private network; DB port NOT published in production

PARTIAL

Virtualization

Multi-stage container, non-root (uid 1000), tini as PID 1, healthcheck. Built and run — 321 MB.

IMPLEMENTED

Web technology

REST over HTTPS with a uniform envelope, server-sent events for real-time, PWA with a service worker

IMPLEMENTED

Multitenancy

Row-scoped shared schema. 12 cross-tenant attacks fired; all 12 refused.

IMPLEMENTED

Service technology

Versioned /v1, 74 routes (71 under /v1), zod validation, stable error codes, idempotency keys

IMPLEMENTED

MODULE 3

Infrastructure mechanisms

Virtual server	Container image; runs anywhere Docker runs. Full test suite passes AGAINST the image.	IMPLEMENTED
Cloud storage device	Postgres volume, upload volume, and client-side IndexedDB with AES-GCM-256 at rest	IMPLEMENTED
Cloud usage monitor	Structured JSON logs, per-request correlation id, operation duration/result, /v1/ops/overview with live counts	PARTIAL
Ready-made environment	compose → migrate → seed → start. Reference-only seed for production verified: 0 demo rows.	IMPLEMENTED
Network perimeter	DB has no published port; API on loopback behind a proxy; CORS allowlist enforced in production	PARTIAL
Resource replication	Stateless API is the precondition and is met. Nothing is replicated.	TARGET

MODULE 4

The eight fundamental architectures

Two are built. Six are design. I will not show you an animation and call it an autoscaler.

Workload distribution

The dispatch engine distributes jobs across a provider pool by computed score

IMPLEMENTED

Resource pooling

Providers are a pool; state is derived and busy members excluded

IMPLEMENTED

Dynamic scalability

HPA on queue depth. BUILT: the readiness gate — /health returns 503 when the DB is down

TARGET

Elastic resource capacity

Cluster autoscaler under the pods

TARGET

Service load balancing

LB with health-checked rotation

TARGET

Cloud bursting

Modelled evening scenario — labelled as modelled

TARGET

Elastic disk provisioning

Storage allocated as data arrives

TARGET

Redundant storage

Replica with failover. Backup procedure documented and rehearsed.

TARGET

Three things block replication today, and each is documented where it is defined: the SSE registry, the rate limiter and the offer sweeper are in-process.

The fix for each is already designed — Redis, and the outbox → Redpanda bus already in the architecture.

Static vs dynamic scheduling

STATIC

Decided before run time, on a fixed schedule.

- Offer sweeper — every 10 s (OFFER_SWEEP_SECONDS)
- Client booking poll — 6 s, or 60 s while streaming
- SSE heartbeat — every 25 s
- Retention purge — 24 h after a sync

DYNAMIC

Decided at run time, from live state.

- Dispatch: pool queried at request time
- Score from live distance, rating, workload
- Wave offered; timeout re-schedules to the next wave
- A decline escalates immediately
- Assignment settled under a row lock — exactly one

RoadAssist's dispatch engine IS dynamic scheduling — it is the clearest Module 4 mechanism the project actually implements.

TESTING

1137 assertions, all executed

Against a real PostgreSQL + PostGIS and a real Chrome. 22 Razorpay stub checks sit outside this total.

Unit	451	state machines, rules, redaction, SMS coordinates, i18n segment budget
------	-----	--

End-to-end	246	the whole API journey against real Postgres
------------	-----	---

Concurrency + real-time	92	paces a sequential suite structurally cannot make
-------------------------	----	---

Security	106	attacks that must FAIL
----------	-----	------------------------

Gateway security	58	webhook signatures, append-only rules, OTP ceilings
------------------	----	---

Browser / offline	184	what only a browser can prove
-------------------	-----	-------------------------------

1137 passed · 0 failed · 0 server errors across the sweep

Every failure has an answer

DETECT → DEGRADE → PRESERVE DATA → RECOVER. Twenty rows in the failure matrix; seven of them here.

FAILURE	DETECTED BY	USER EXPERIENCE	RECOVERY
Network lost	connectivity manager	off-grid mode; SOS stored locally	auto on reconnect
Backend unreachable	probe fails, radio up	LIMITED, then OFF-GRID	auto
Database down	/health → 503	safe 500 with a request id	auto, no restart — tested
GPS denied	geolocation error	“Unknown — denied”, never a fake fix	next fix
AI endpoint down	timeout	rules engine — nothing visible	auto
Payment fails	gateway error / bad signature	invoice stays unpaid	customer retries
Provider times out	expires_at passes	sweeper escalates to next wave	ladder continues

Each row names the suite that proves it. Database loss and backup/restore are now automated CI steps, not prose.

IMPLEMENTATION STATUS

What is built, what is partial, what is design

Marked from the code, not from intent.

AI diagnosis rules engine + trained YOLO11 for road damage	PARTIAL	Payment mock on the demo — never a live account	IMPLEMENTED
SOS — online e2e + concurrency suites	IMPLEMENTED	Location services server-side, coarsened, cached, off in tests	IMPLEMENTED
SOS — offline browser suite drives the whole scenario	IMPLEMENTED	RAKSHA photo review model frames, viewer, false-positive dismiss	IMPLEMENTED
Offline storage IndexedDB, AES-GCM-256, survives restart	IMPLEMENTED	Fleet schema + roles exist; no dedicated UI	PARTIAL
Store-and-forward sync idempotent; duplicate proven impossible	IMPLEMENTED	Analytics ops overview with live counts; no BI layer	PARTIAL
Dispatch ladder, timeout, busy-exclusion, race-safe	IMPLEMENTED	Cloud autoscaling designed; no cluster	TARGET
Real-time SSE, measured 65 ms	IMPLEMENTED	Replication / load balancing stateless API is the precondition, and is met	TARGET

GREEN = code exists, database persists it, UI consumes it, AND a test exercises it. AMBER = some of that. BLUE = architecture only.

Limitations

In order of importance. Every one of these is also written in the code or the docs.

- 1 The demo is one free-tier Render + Neon instance in Singapore, no India region, no cluster; it sleeps after 15 min idle (keep-awake ping in progress).
- 2 Single instance only: SSE registry, rate limiter and offer sweeper are in-process.
- 3 Location lookups send positions, coarsened to about 110 m, to OpenStreetMap and OSRM servers in Germany/EU. Declared (ADR-0012).
- 4 The ERSS 112 handoff is a stub, and the API response says so. Emergency isolation (ADR-0005) is a design, not a deployment.
- 5 Payment checks run only against a local stub of Razorpay's API, outside the 1137 — never a real account.
- 6 The diagnosis “AI” is a deterministic rules engine. Labelled as such everywhere.
- 7 No load test, no external penetration test, no coverage on the HTTP layer (suites run out-of-process).
- 8 Device encryption protects a storage dump, not script on the same origin — and the UI says exactly that.
- 9 GPS cold start can take minutes and may never fix indoors. The app shows “Unknown” rather than a guess.

FUTURE — LABELLED AS SUCH

Roadmap

NEXT

- Redis-backed rate limiting
- Outbox → event bus for SSE fan-out
- WAL archiving (RPO under a day)
- Object storage for photos

THEN

- Multi-region deployment
- Database read replicas
- External APM + error reporting
- Automated backup schedule
- Self-hosted map services in an Indian region

LATER

- Predictive maintenance at volume
- Fleet management UI
- Satellite emergency communication
- Mesh networking between devices
- Government emergency-network integration

Satellite, mesh and government-network integration are FUTURE and are labelled that way everywhere in the product — not implemented, not claimed.

Where the money would come from

Potential, not current. No commercial operation exists — this is a university project.

B2C

Subscription for individual drivers; pay-per-incident for non-members

B2B

Fleet operators — uptime is their cost centre; per-vehicle per-month

B2B2C

Insurers and OEMs bundling roadside cover into an existing policy

B2G

Highway authorities — RAKSHA road-health data and incident analytics

The unit economics that make it plausible: the platform runs on ZERO paid third-party accounts by default.
Maps are keyless OpenStreetMap, AI is a local rules engine, and every vendor sits behind an adapter with a working local implementation.

Current status: no revenue, no customers, no commercial deployment. Stated so the model is read as a plan, not a claim.

What a competitor would have to build

Not “we are better than X” — we have not benchmarked anyone. This is what is genuinely hard here.

Network resilience

An emergency workflow that runs entirely on the device, with an encrypted journal and idempotent forward-sync. This is the moat.

Honest degradation

The product never claims something reached the cloud when it did not. That is a design discipline, not a feature you can add later.

Race-safe dispatch

Row-locked assignment, wave ladder, timeout escalation, derived provider state — proven with ten simultaneous accepts.

Explainable diagnosis

The same rule table on device and cloud, with a CI test that fails the build if they diverge.

Auditability

Hash-chained append-only log, verified live in the operations view.

THE FILM

RoadAssist Bharat in 30 seconds

Real app footage and real screenshots; the drawn scenes are tagged as illustrations.



WHAT IT SHOWS

Request help

the nearest verified mechanic, ranked by PostGIS

Off-grid SOS

stored on the device; 112 · 1033 · 108 one tap away

RAKSHA

YOLO11 boxes on real road frames, then authority review

Under the hood

1137 automated checks, six suites

Also on the showcase: roadassistbharat.online/media/roadassist-promo.mp4

Live demonstration

PART ONE · THE FULL JOURNEY

1. Login
2. Vehicle
3. Breakdown + AI diagnosis
4. Request assistance
5. Dispatch — ranked offers
6. Mechanic accepts
7. Live status, no refresh
8. Service → invoice → payment
9. Review

PART TWO · THE ONE NOBODY ELSE HAS

1. Network OFF — the UI changes immediately
2. Local diagnosis, labelled
3. Hold SOS → off-grid incident, real GPS
4. "Nothing has been transmitted"
5. CLOSE THE TAB. REOPEN IT.
6. The incident is still there
7. Network ON → automatic sync
8. "SOS synchronized"
9. Replay the reference → duplicate refused

If any step fails, the failure IS the demonstration — nothing here fakes a success.

RoadAssist Bharat

From breakdown to resolution — even when connectivity fails.

AI

explainable
rules engine

CLOUD

consumed and
provided

OFFLINE

the whole emergency
path on-device

REAL-TIME

65 ms, and never
the only path

SECURITY

106 attacks,
all refused

DISPATCH

dynamic, race-safe
scheduling

“RoadAssist doesn't stop when the network stops.”

1137 assertions · 6 suites · 0 failures · 58 tables · 74 routes · 13 ADRs · every claim on these slides is testable