



Business Use Cases

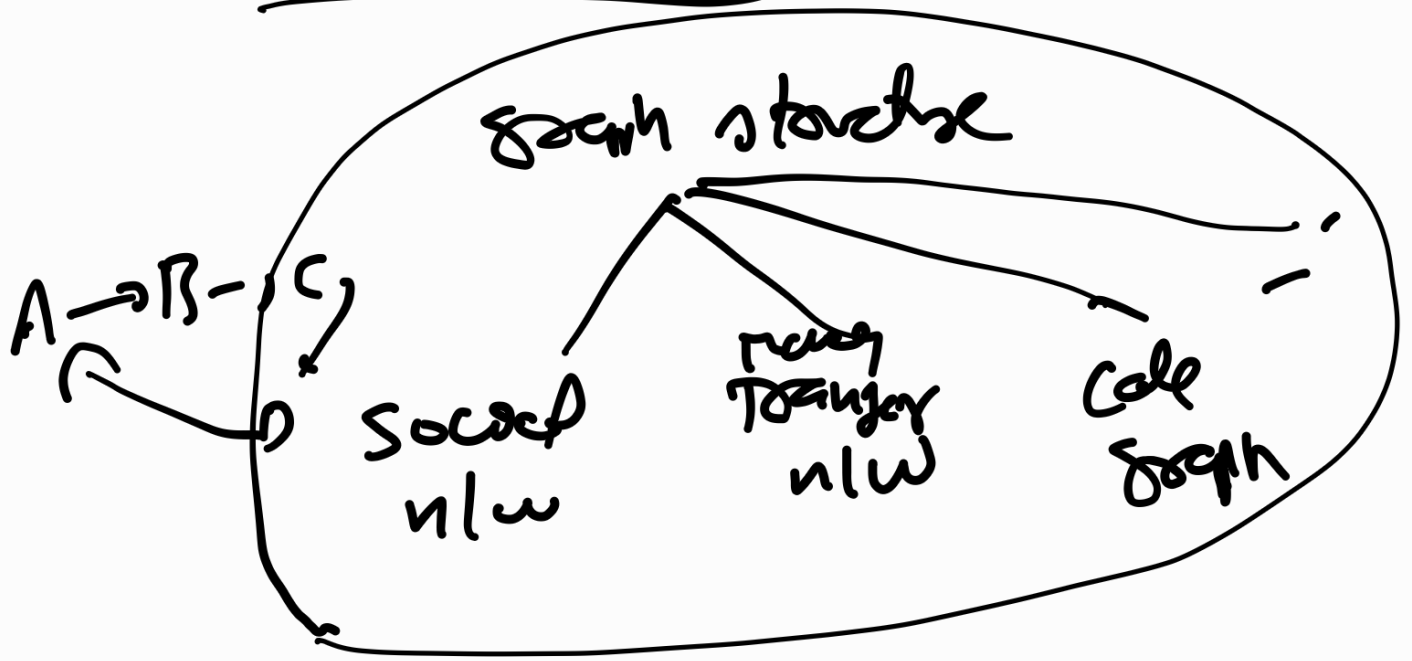

↓ logical

as interaction

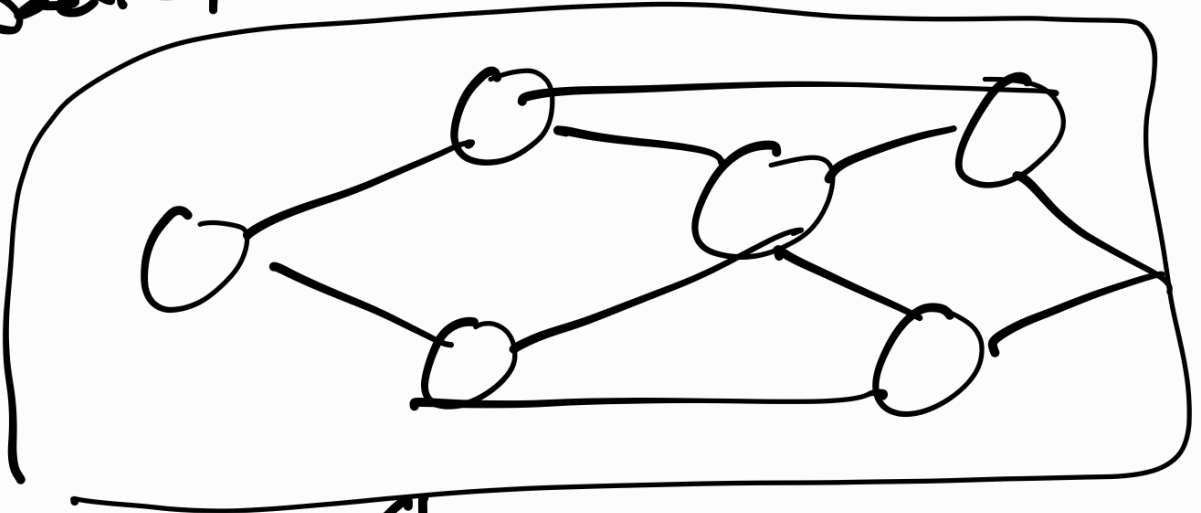

✓ interaction data (pattern)



why?

physical
specialized servers
(nodes)
(scalable)

Adapting for

post809

note

used name are ...


6
5
4
3
2
1

(1) 2

id	src	target
0	1	3
1	3	4
2		
3		
4		

(1) 3

nodes

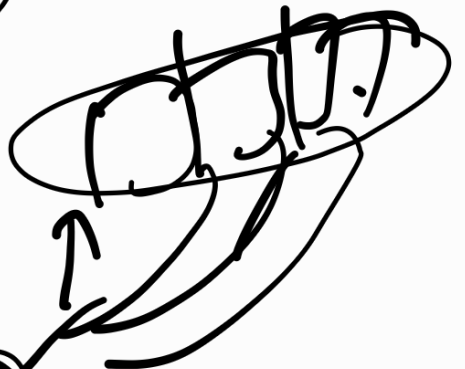


note

id	first	next	label
N1	142		1
N2	143		2
N3	144		3
N4	145		4
N5	146		5
N6			

15644

6

parent

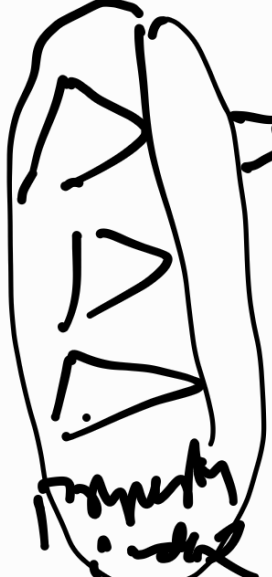

propagation
label

id	next	key-value
1	1	next is key in
2	2	
3	3	
4	4	
5	5	
6	6	
7	7	
8	8	
9	9	
10	10	

2 class
1403

3414

id	start node	end node	type	source chain	target chain
121	.	122		143	.
122				144	.
123				145	.
124				1	.
125					.
126				146	
127				-1	
128				-1	
129				-1	

indexing → to find start node

~~to find~~

node on

relation then on

fixed on 52K

→ does not return
index




to find. for
nodes relation.

index - for
address

graph traversal

see in calculator

→ 0 → 0 → 0

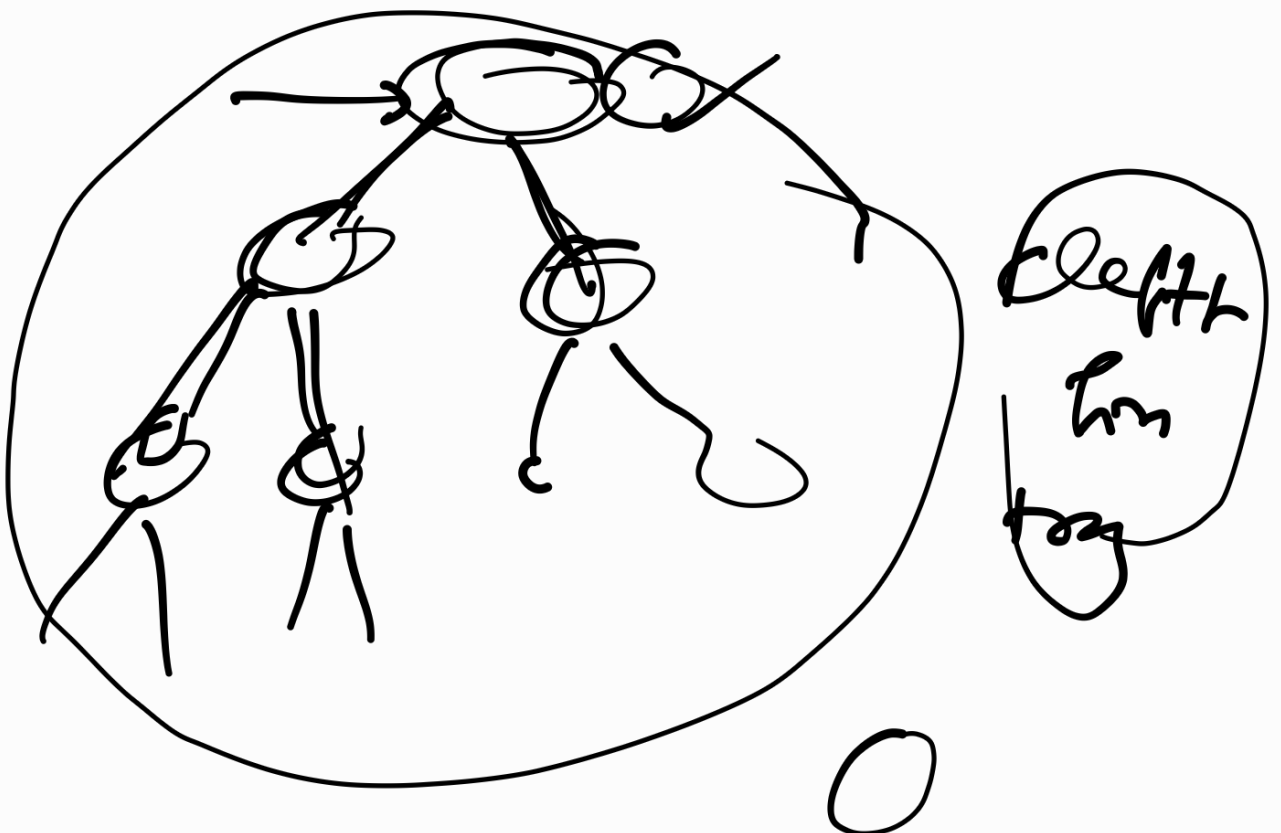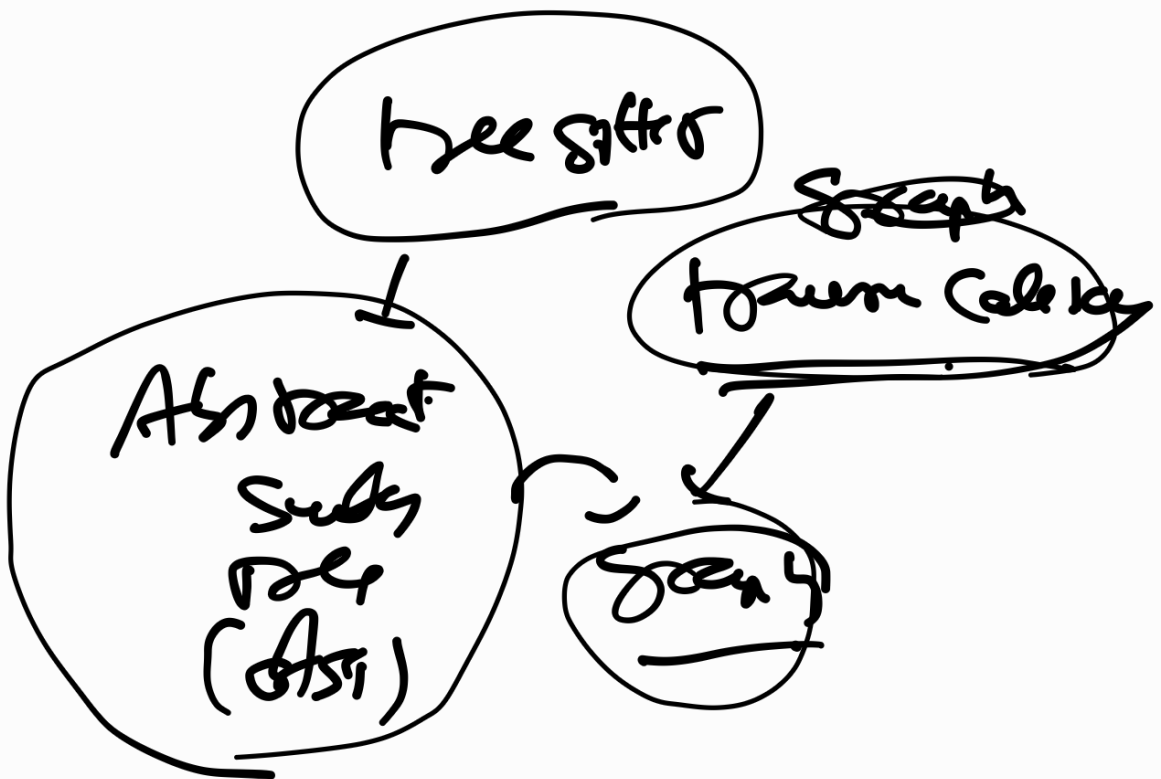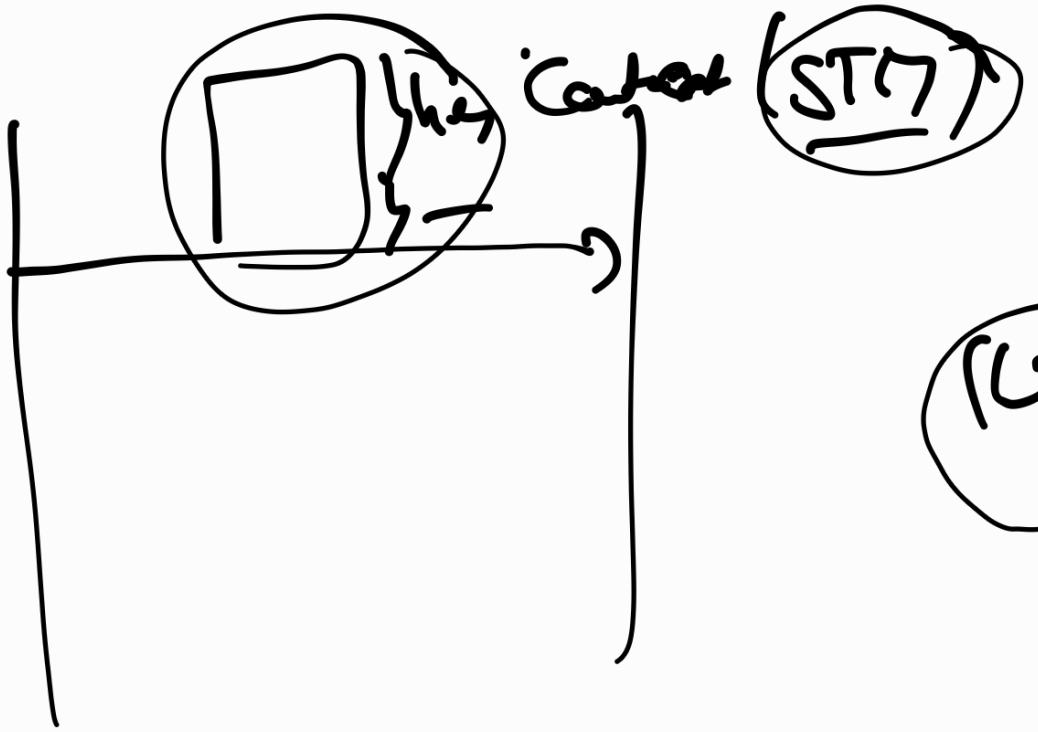

→

