

MCP

① Communicator final
SSN-MC

protocol... —
network: turn/lat (or)
turn/call

② client, server (system)

③ modes of MCP

streaming ~~manually~~ ~~(protocol)~~

streamable
- h/t/h/ (non
(separate marked
protocol)



inference server

h/t/h/ make
representation

most 2

h/t/h/ (or)

h/t/call

new latency

inference (stream)

(marked)

Application

Inference server

task
priority
Resource
delay

python send
all the (library)
stream manually

h/t/h/ make

representation

most 2

h/t/h/ (or)

h/t/call

new latency

inference (stream)

(marked)

Application



Inference server

harmen: reverse agent capability

development $\rightarrow$ studio

development $\rightarrow$ streamable http


step $\rightarrow$ stepwise prob
up

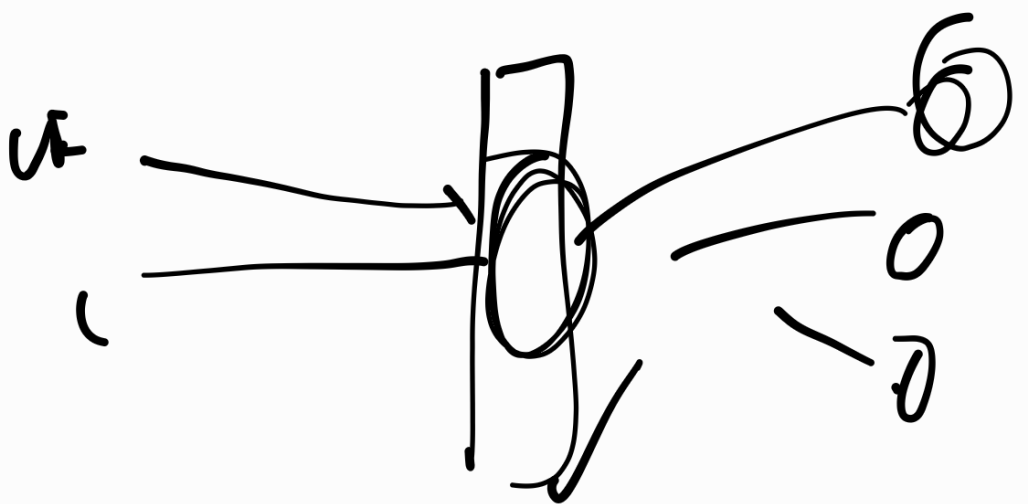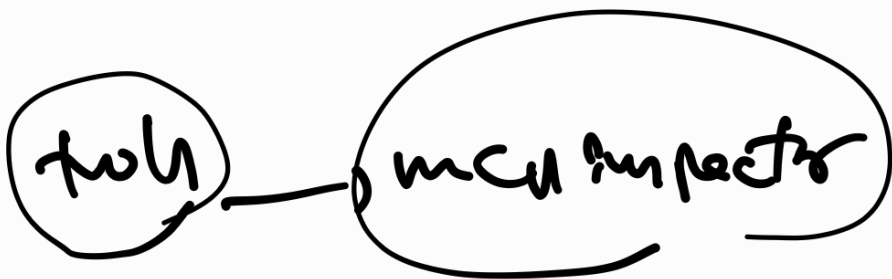


a separate MCP Saturday

✓


~~middle~~ Custom middleman

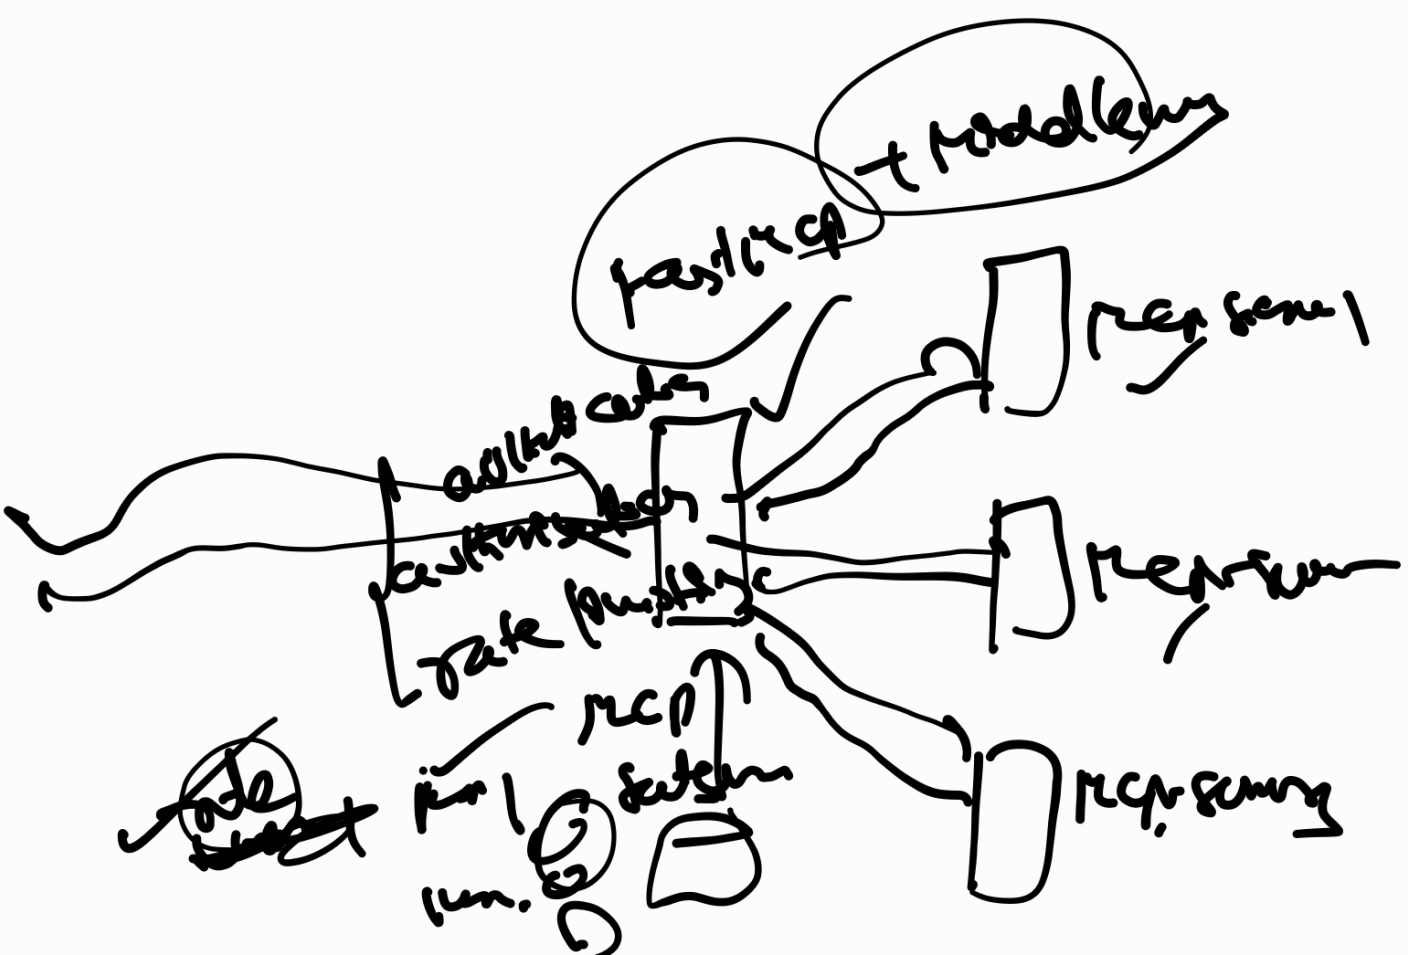


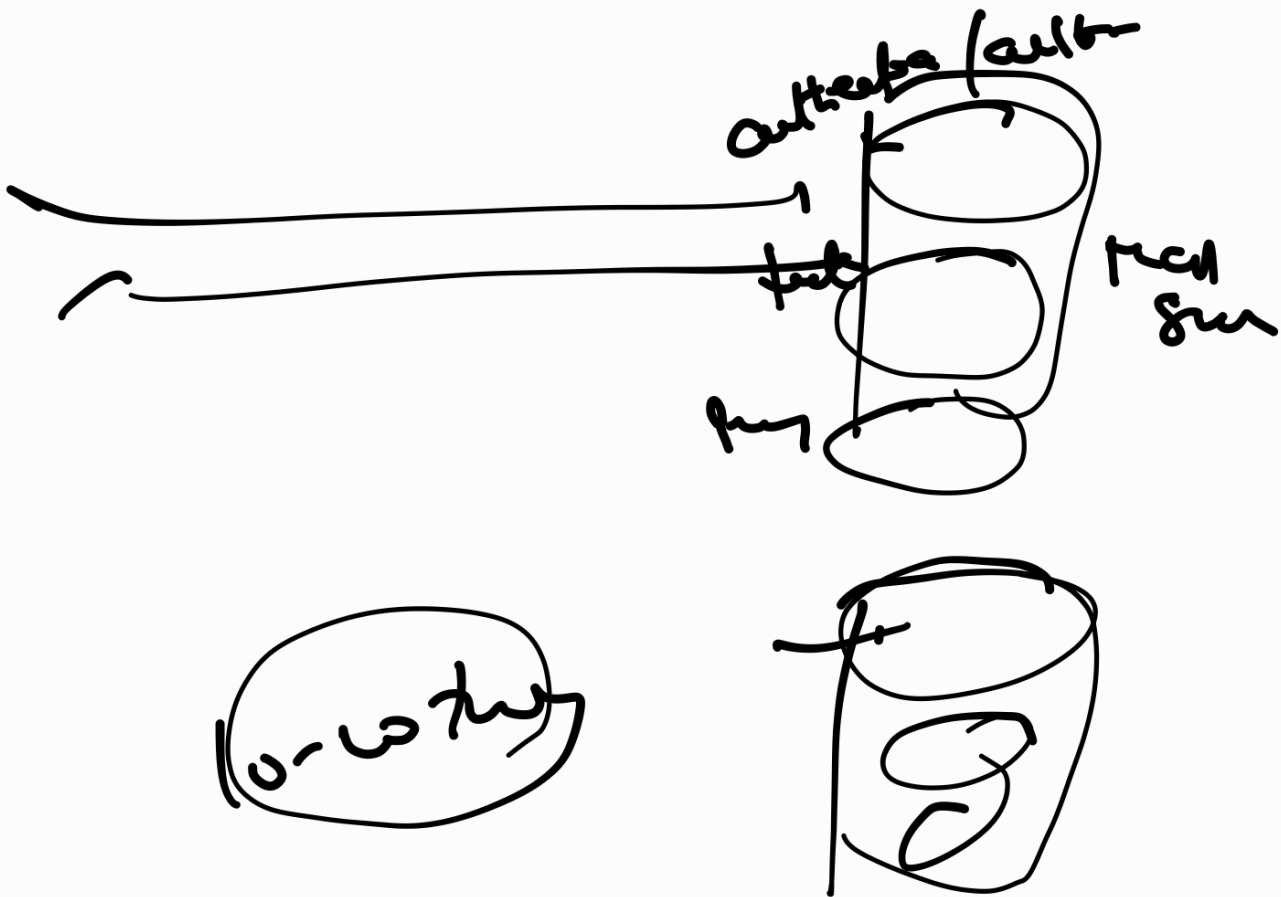

Single Asset


Multi Asset

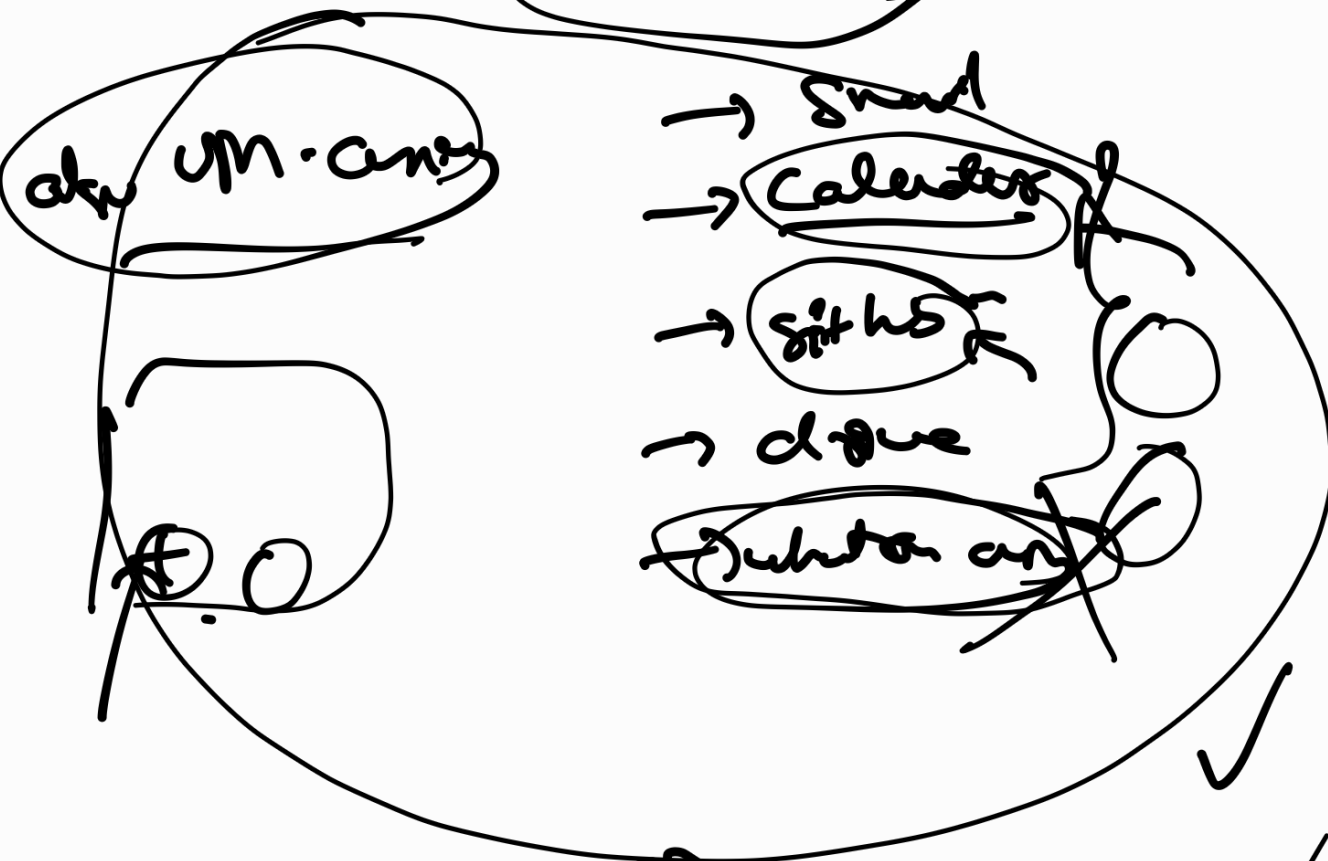

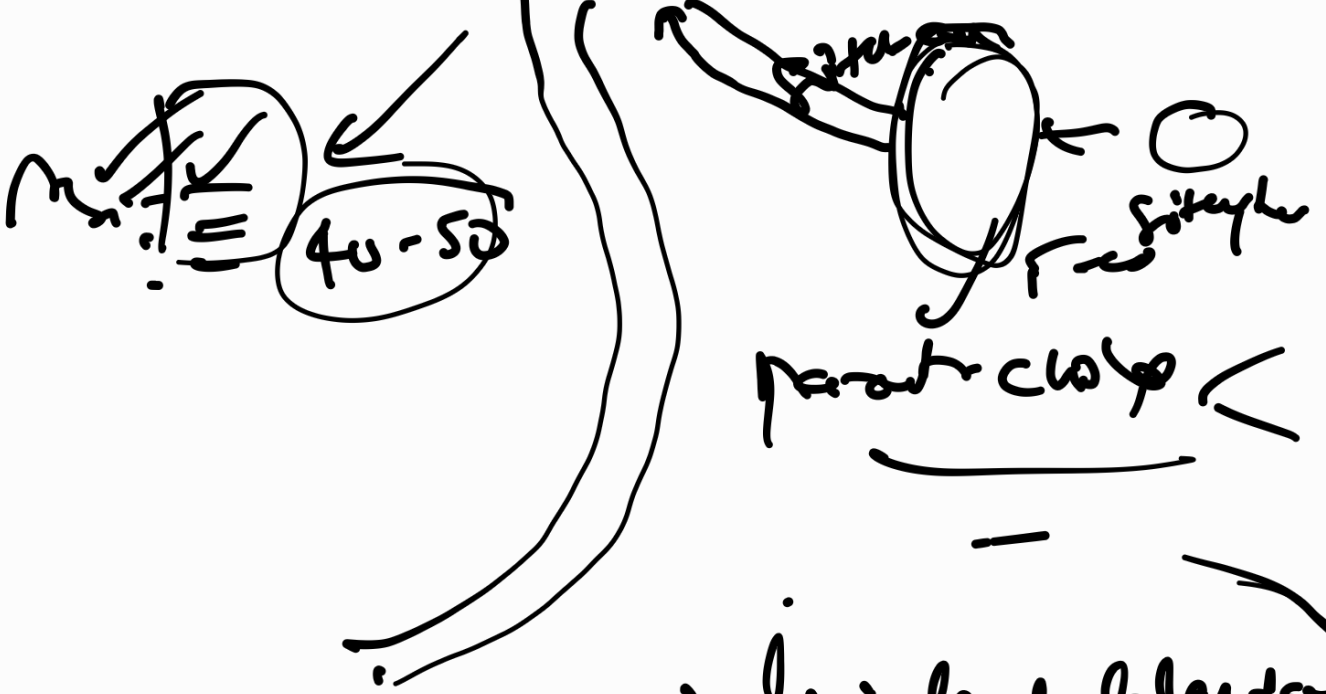

→ low level deletion
vector

→ Sub/Asst Conso. b3

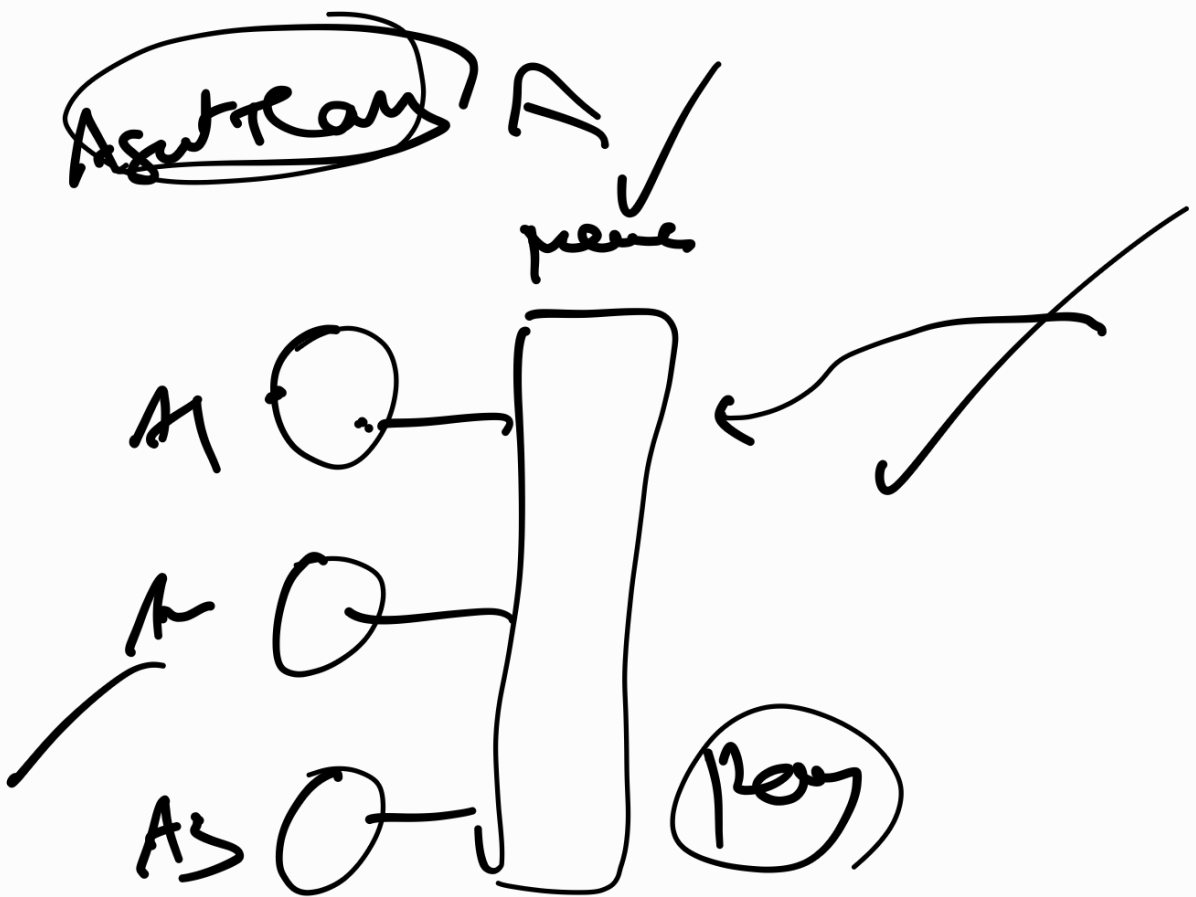

Calc on

→ planum
→ team
→ chellu

deep research

low level
captain entry