



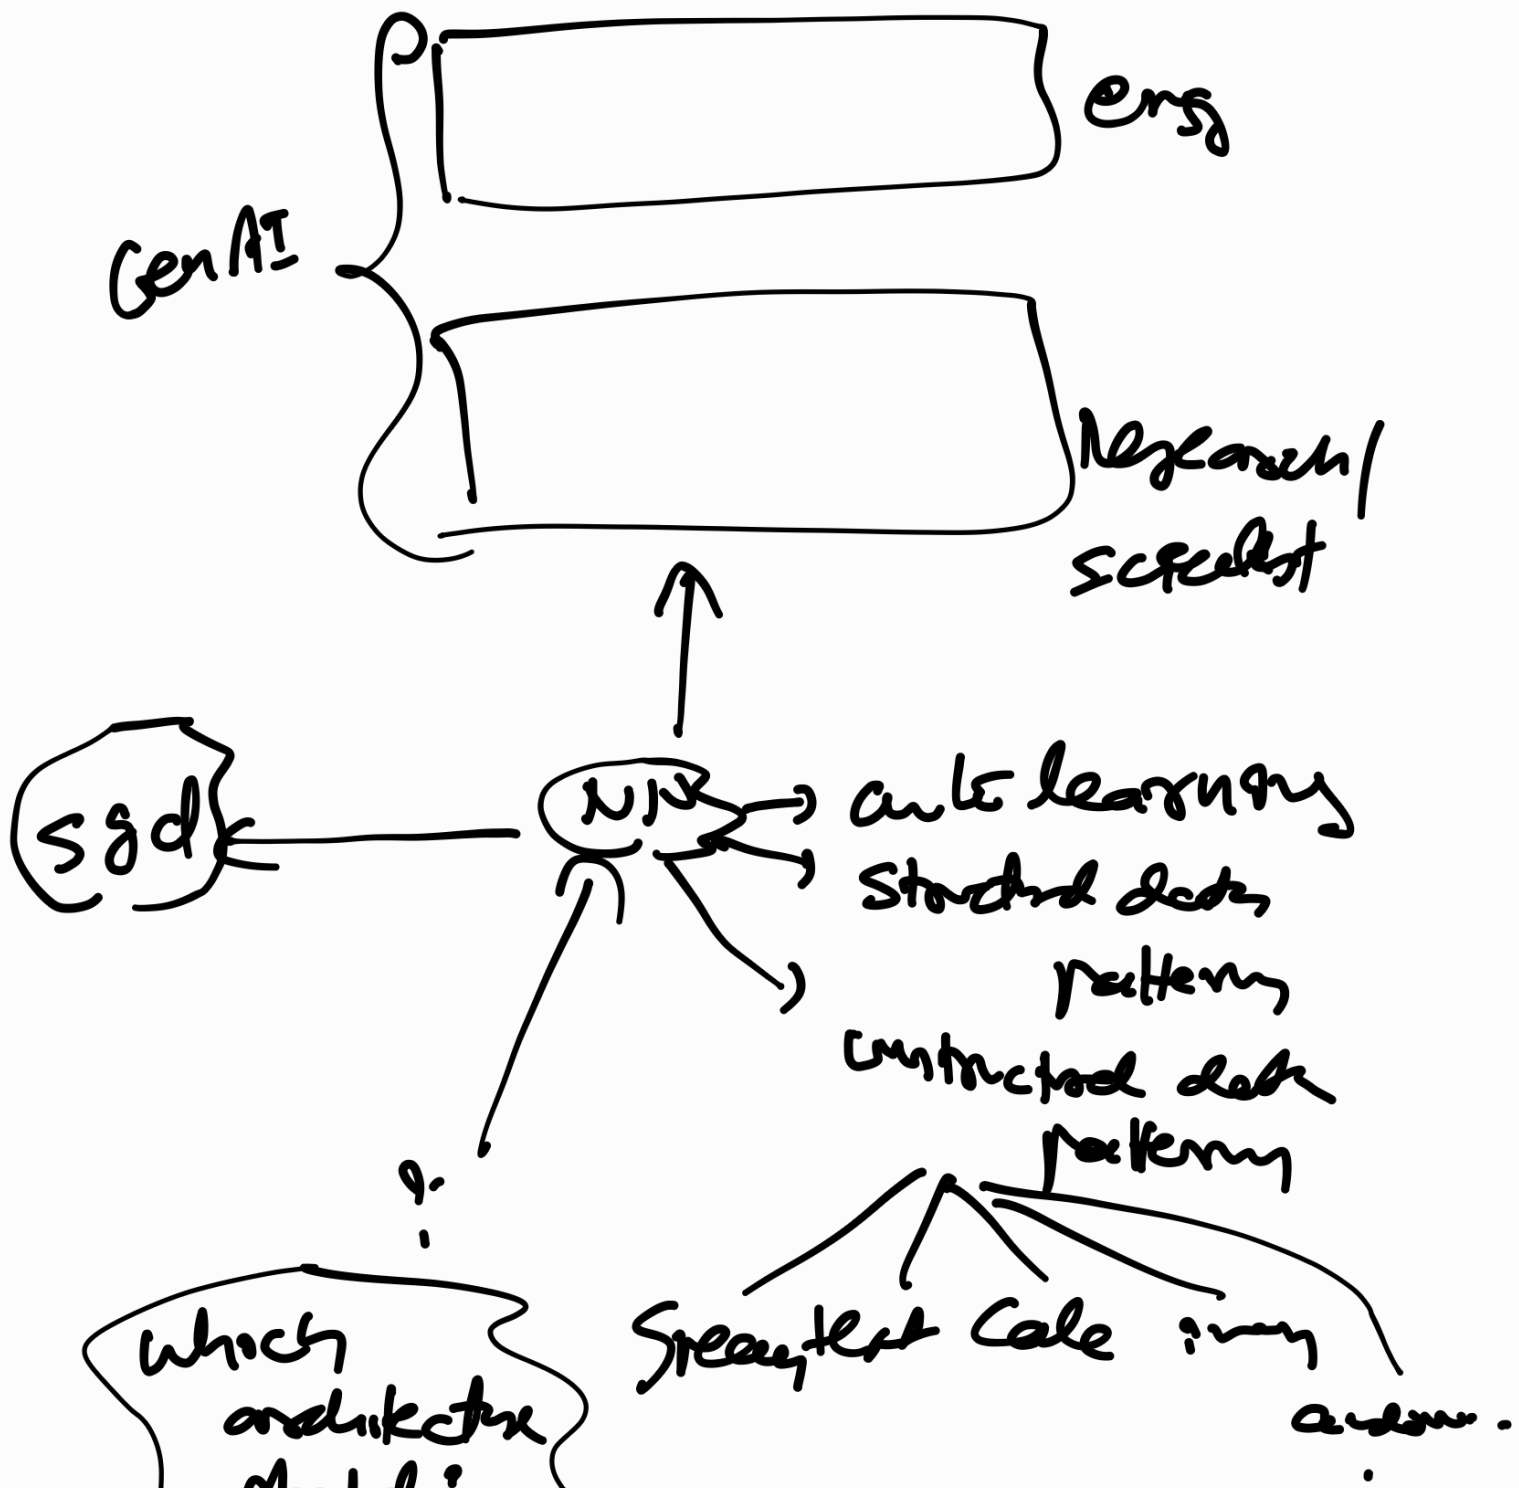

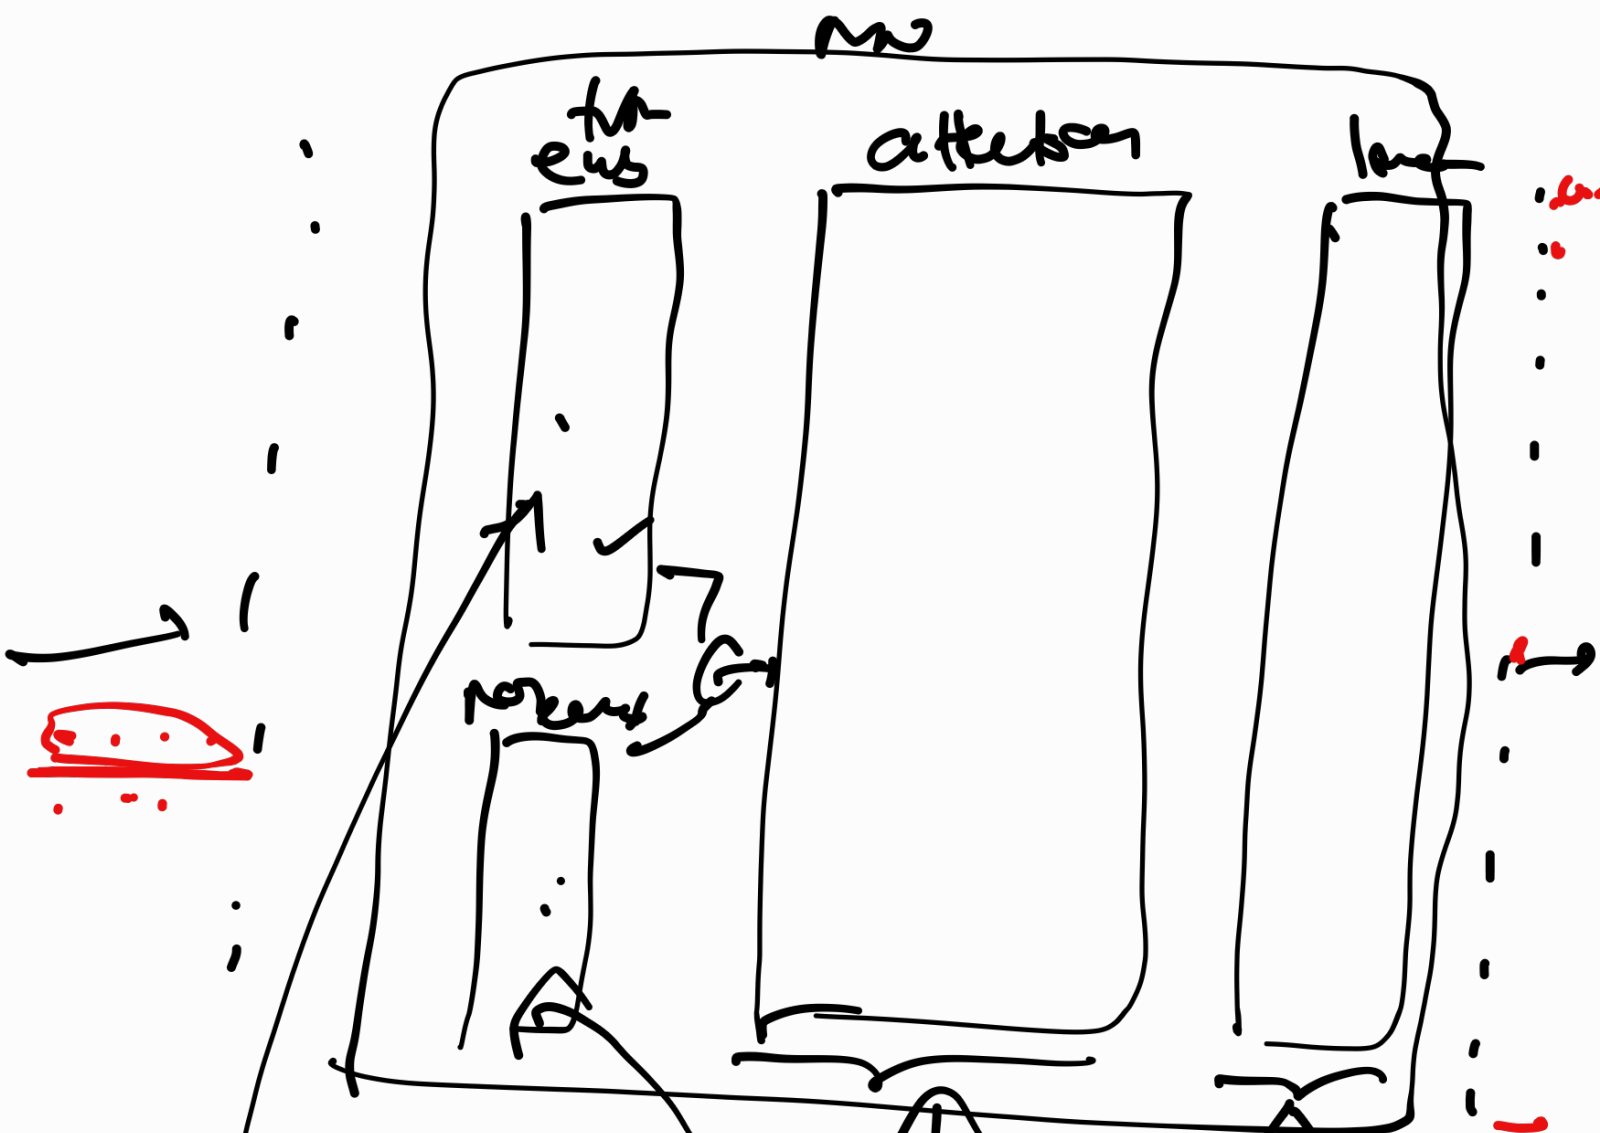


tokens → embedding vector

positional encodings → embedding vector

Contextual vectors





word vectors

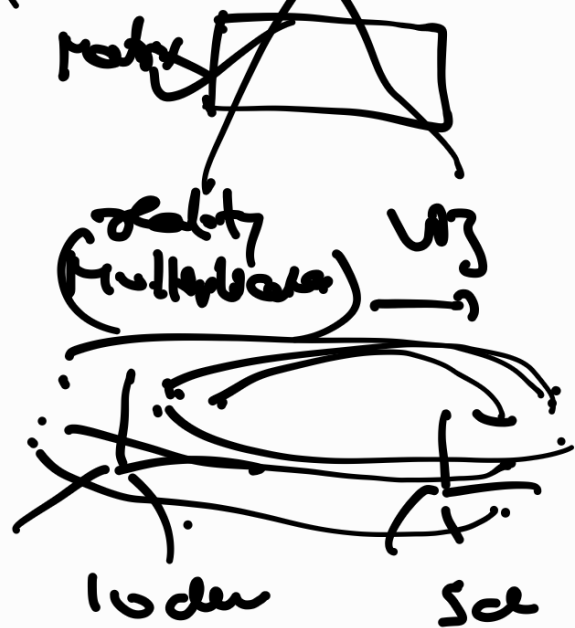


Place attention




Learned patterns

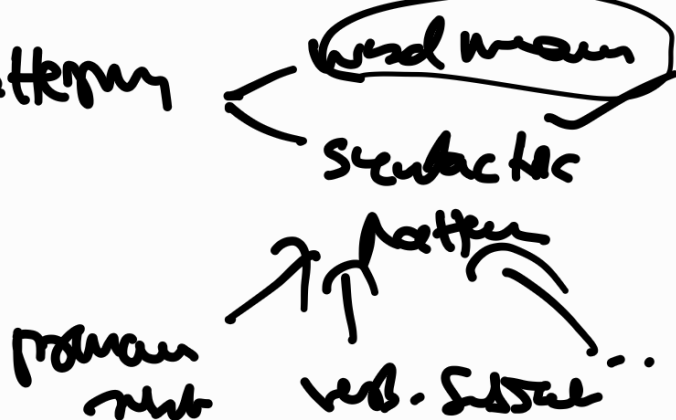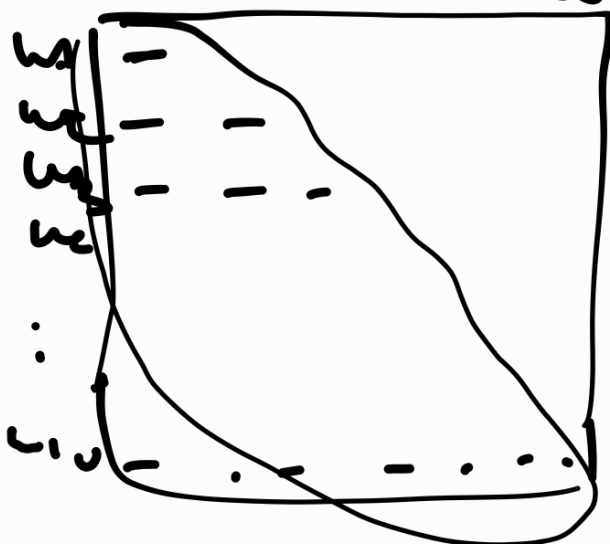


Qkv attention

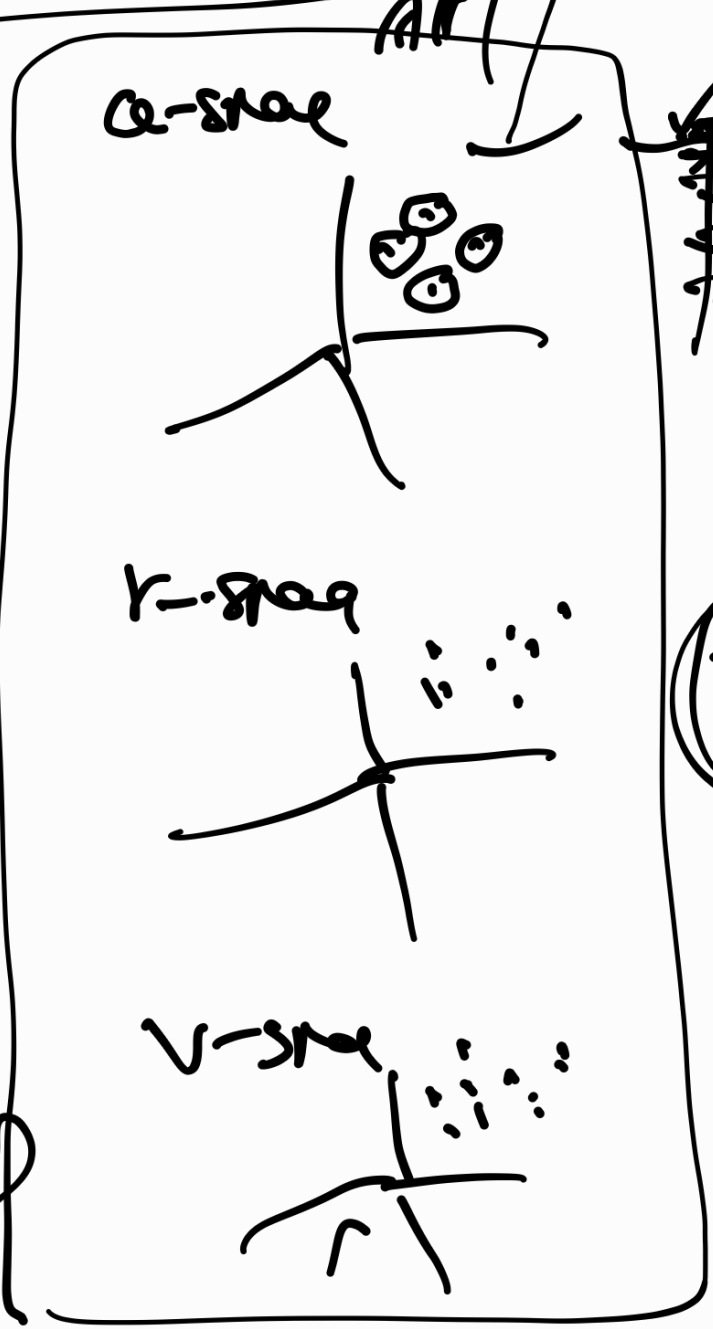



Altogether
(one type of pattern)

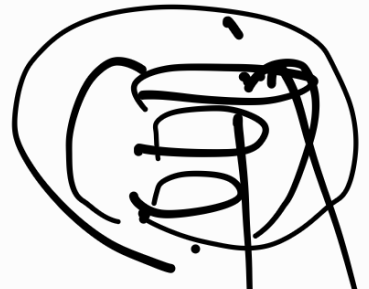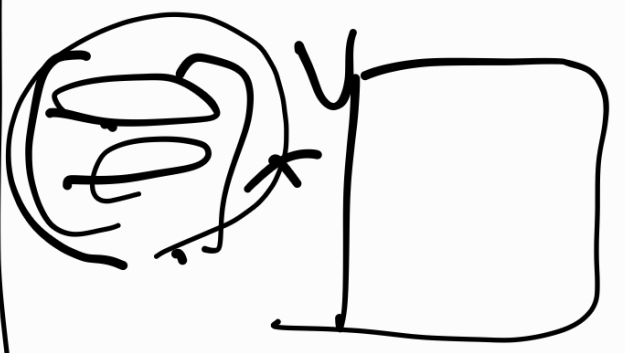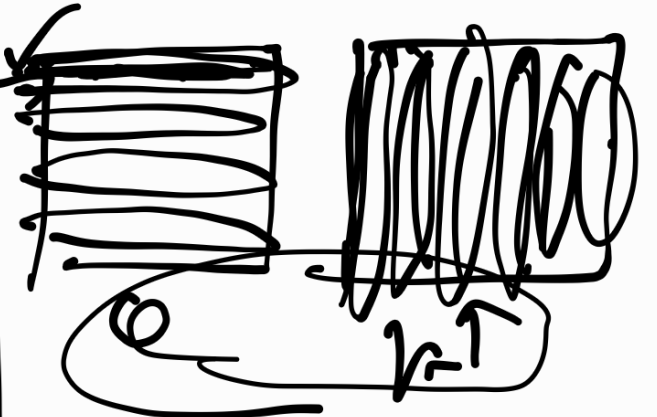


Altogether K

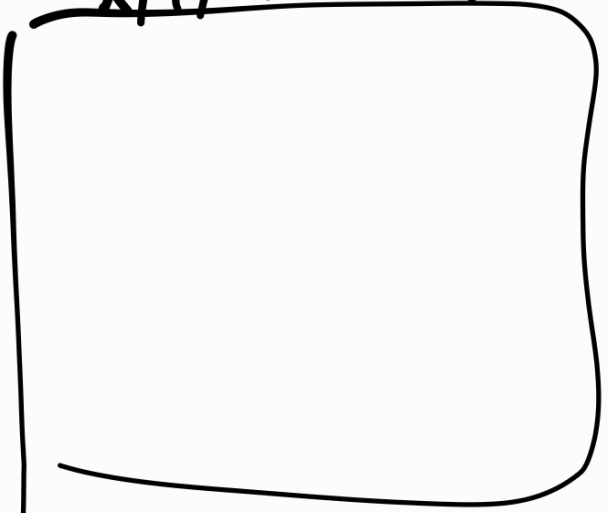

Altogether V

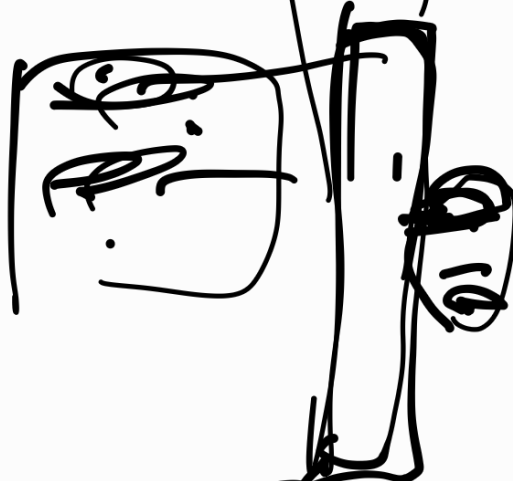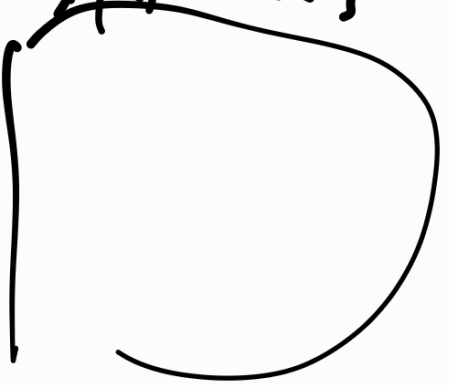

lower
low

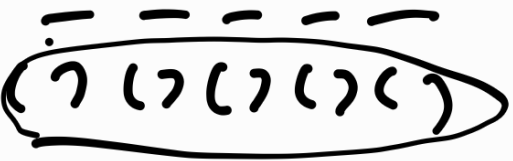

Softmax output categories

logits to
probabilities

attention weights
to
normalized attention weights,

loss calculation



loss calculation

$$\text{loss} = - \sum_{i=1}^3 y_i \log p_i$$


$$= - 1 \cdot \log 0.8$$

NN workflow

adjust
hyper
parameters

adjust
initialised
layers

modify
architecture

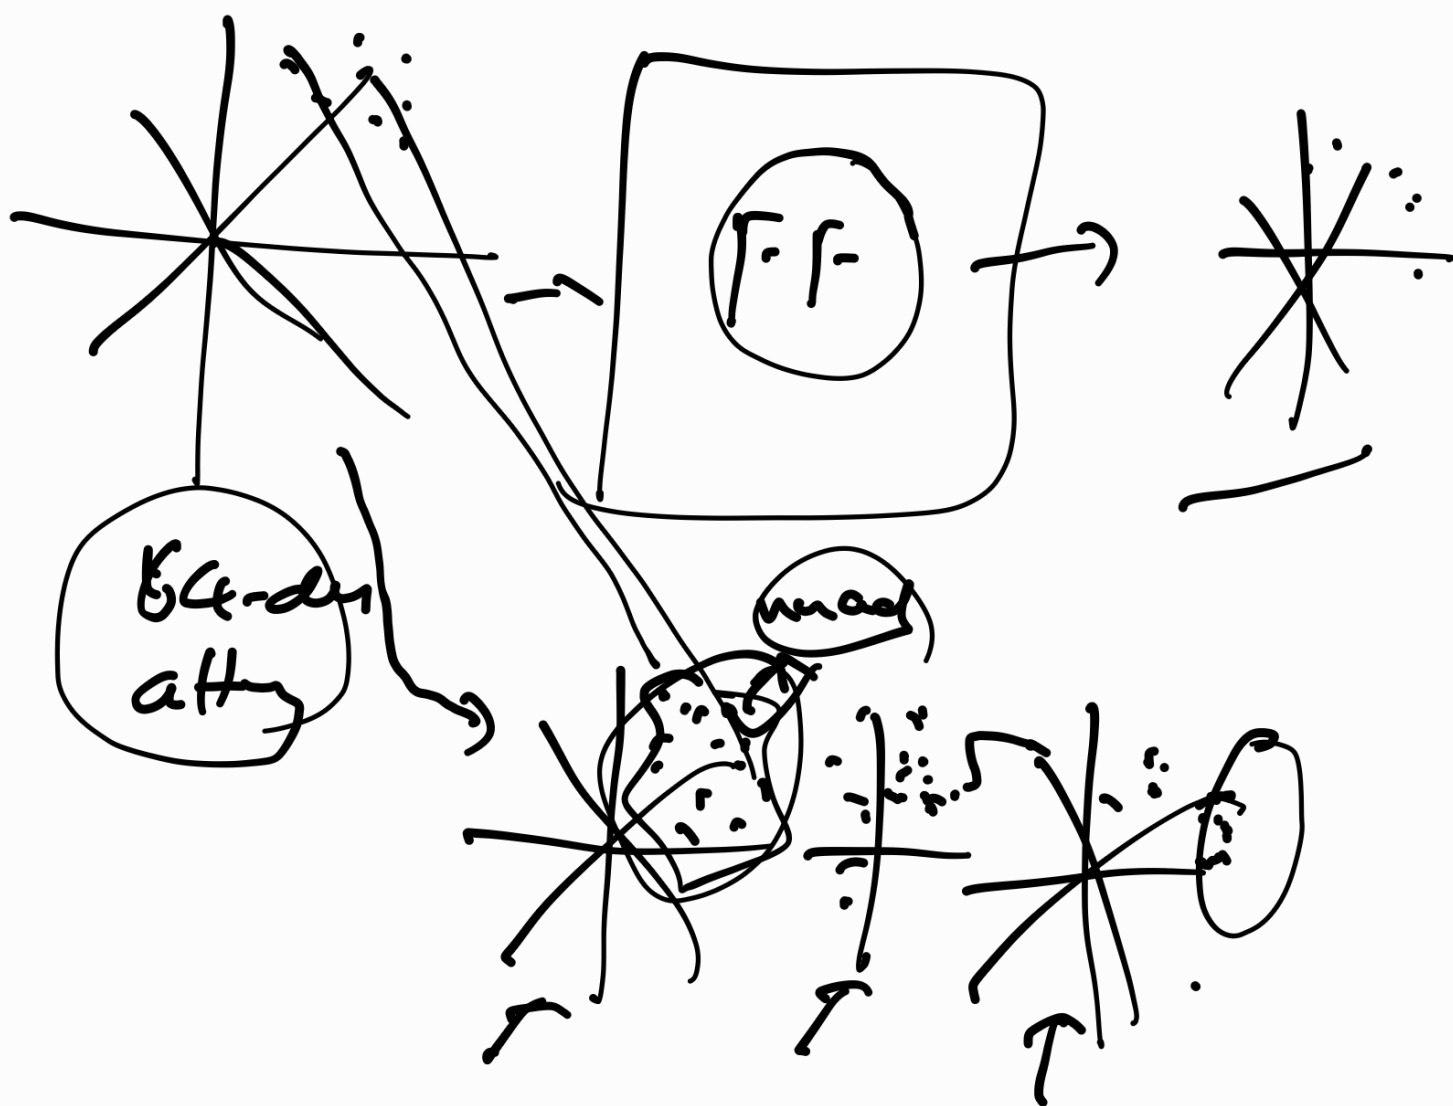





Layer normalization

For smooth gradient updates

True:


higher activation may
lead to explosive
gradients

lower activation may lead
to vanishing gradients

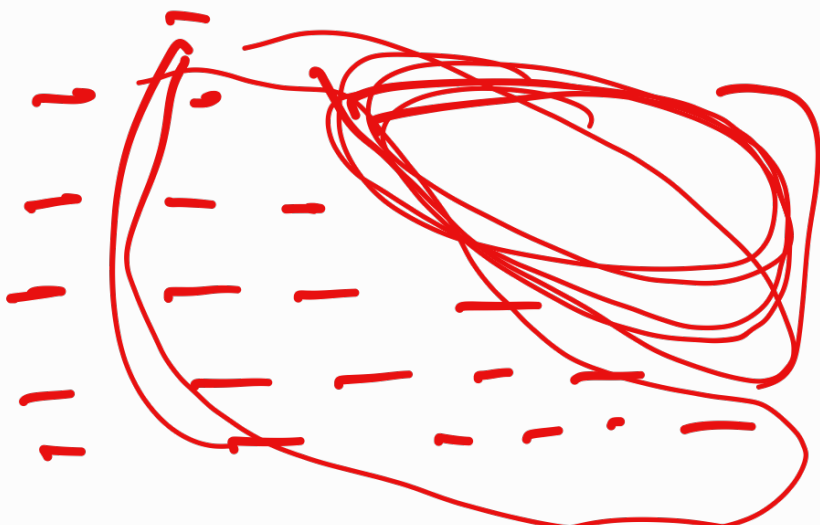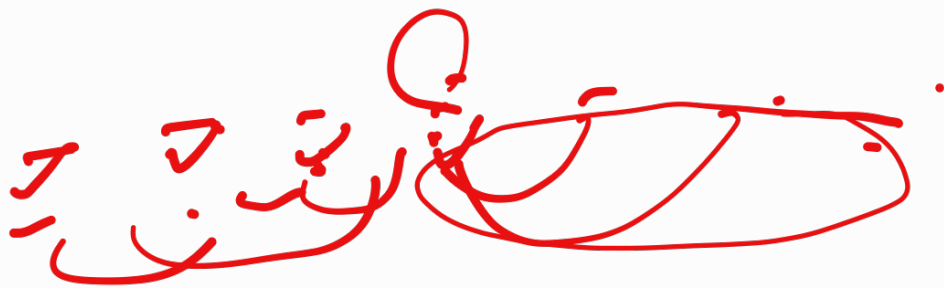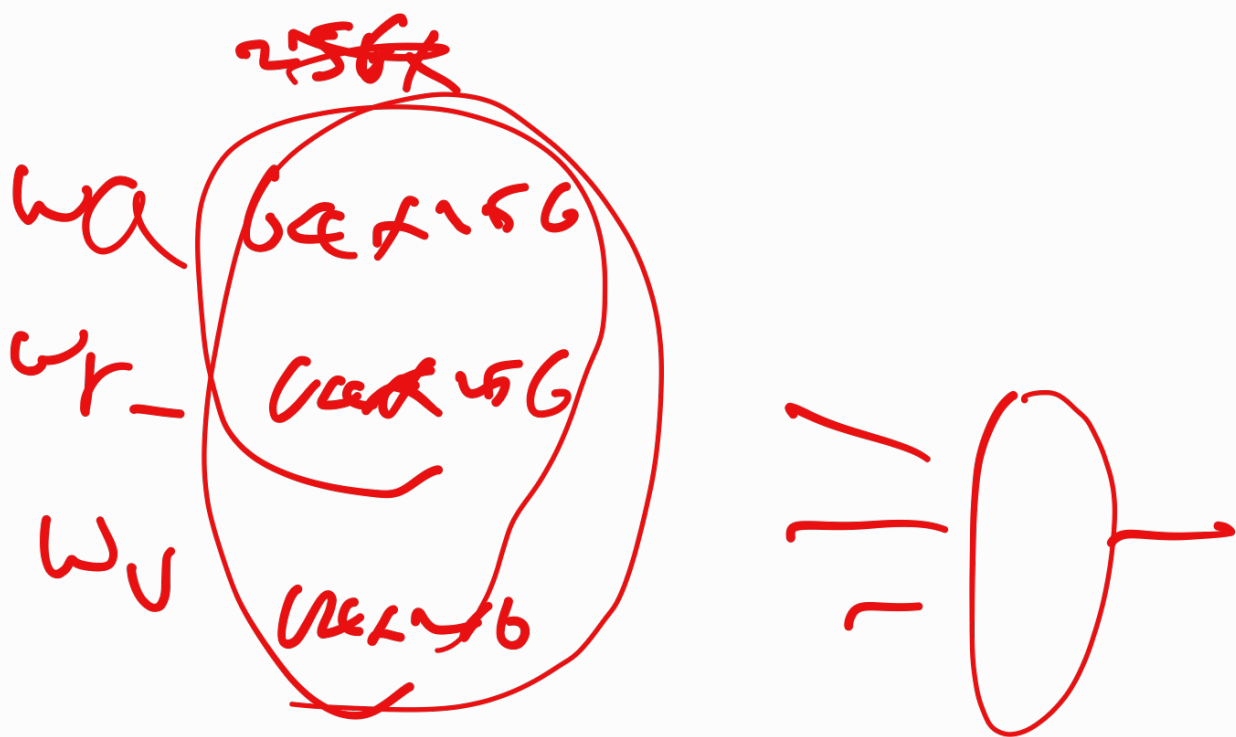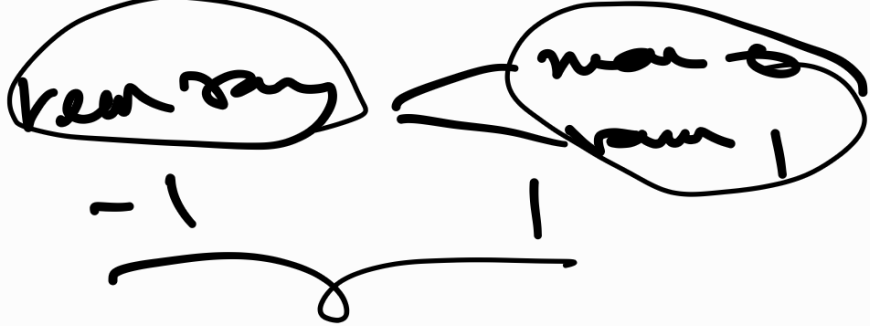


feeding



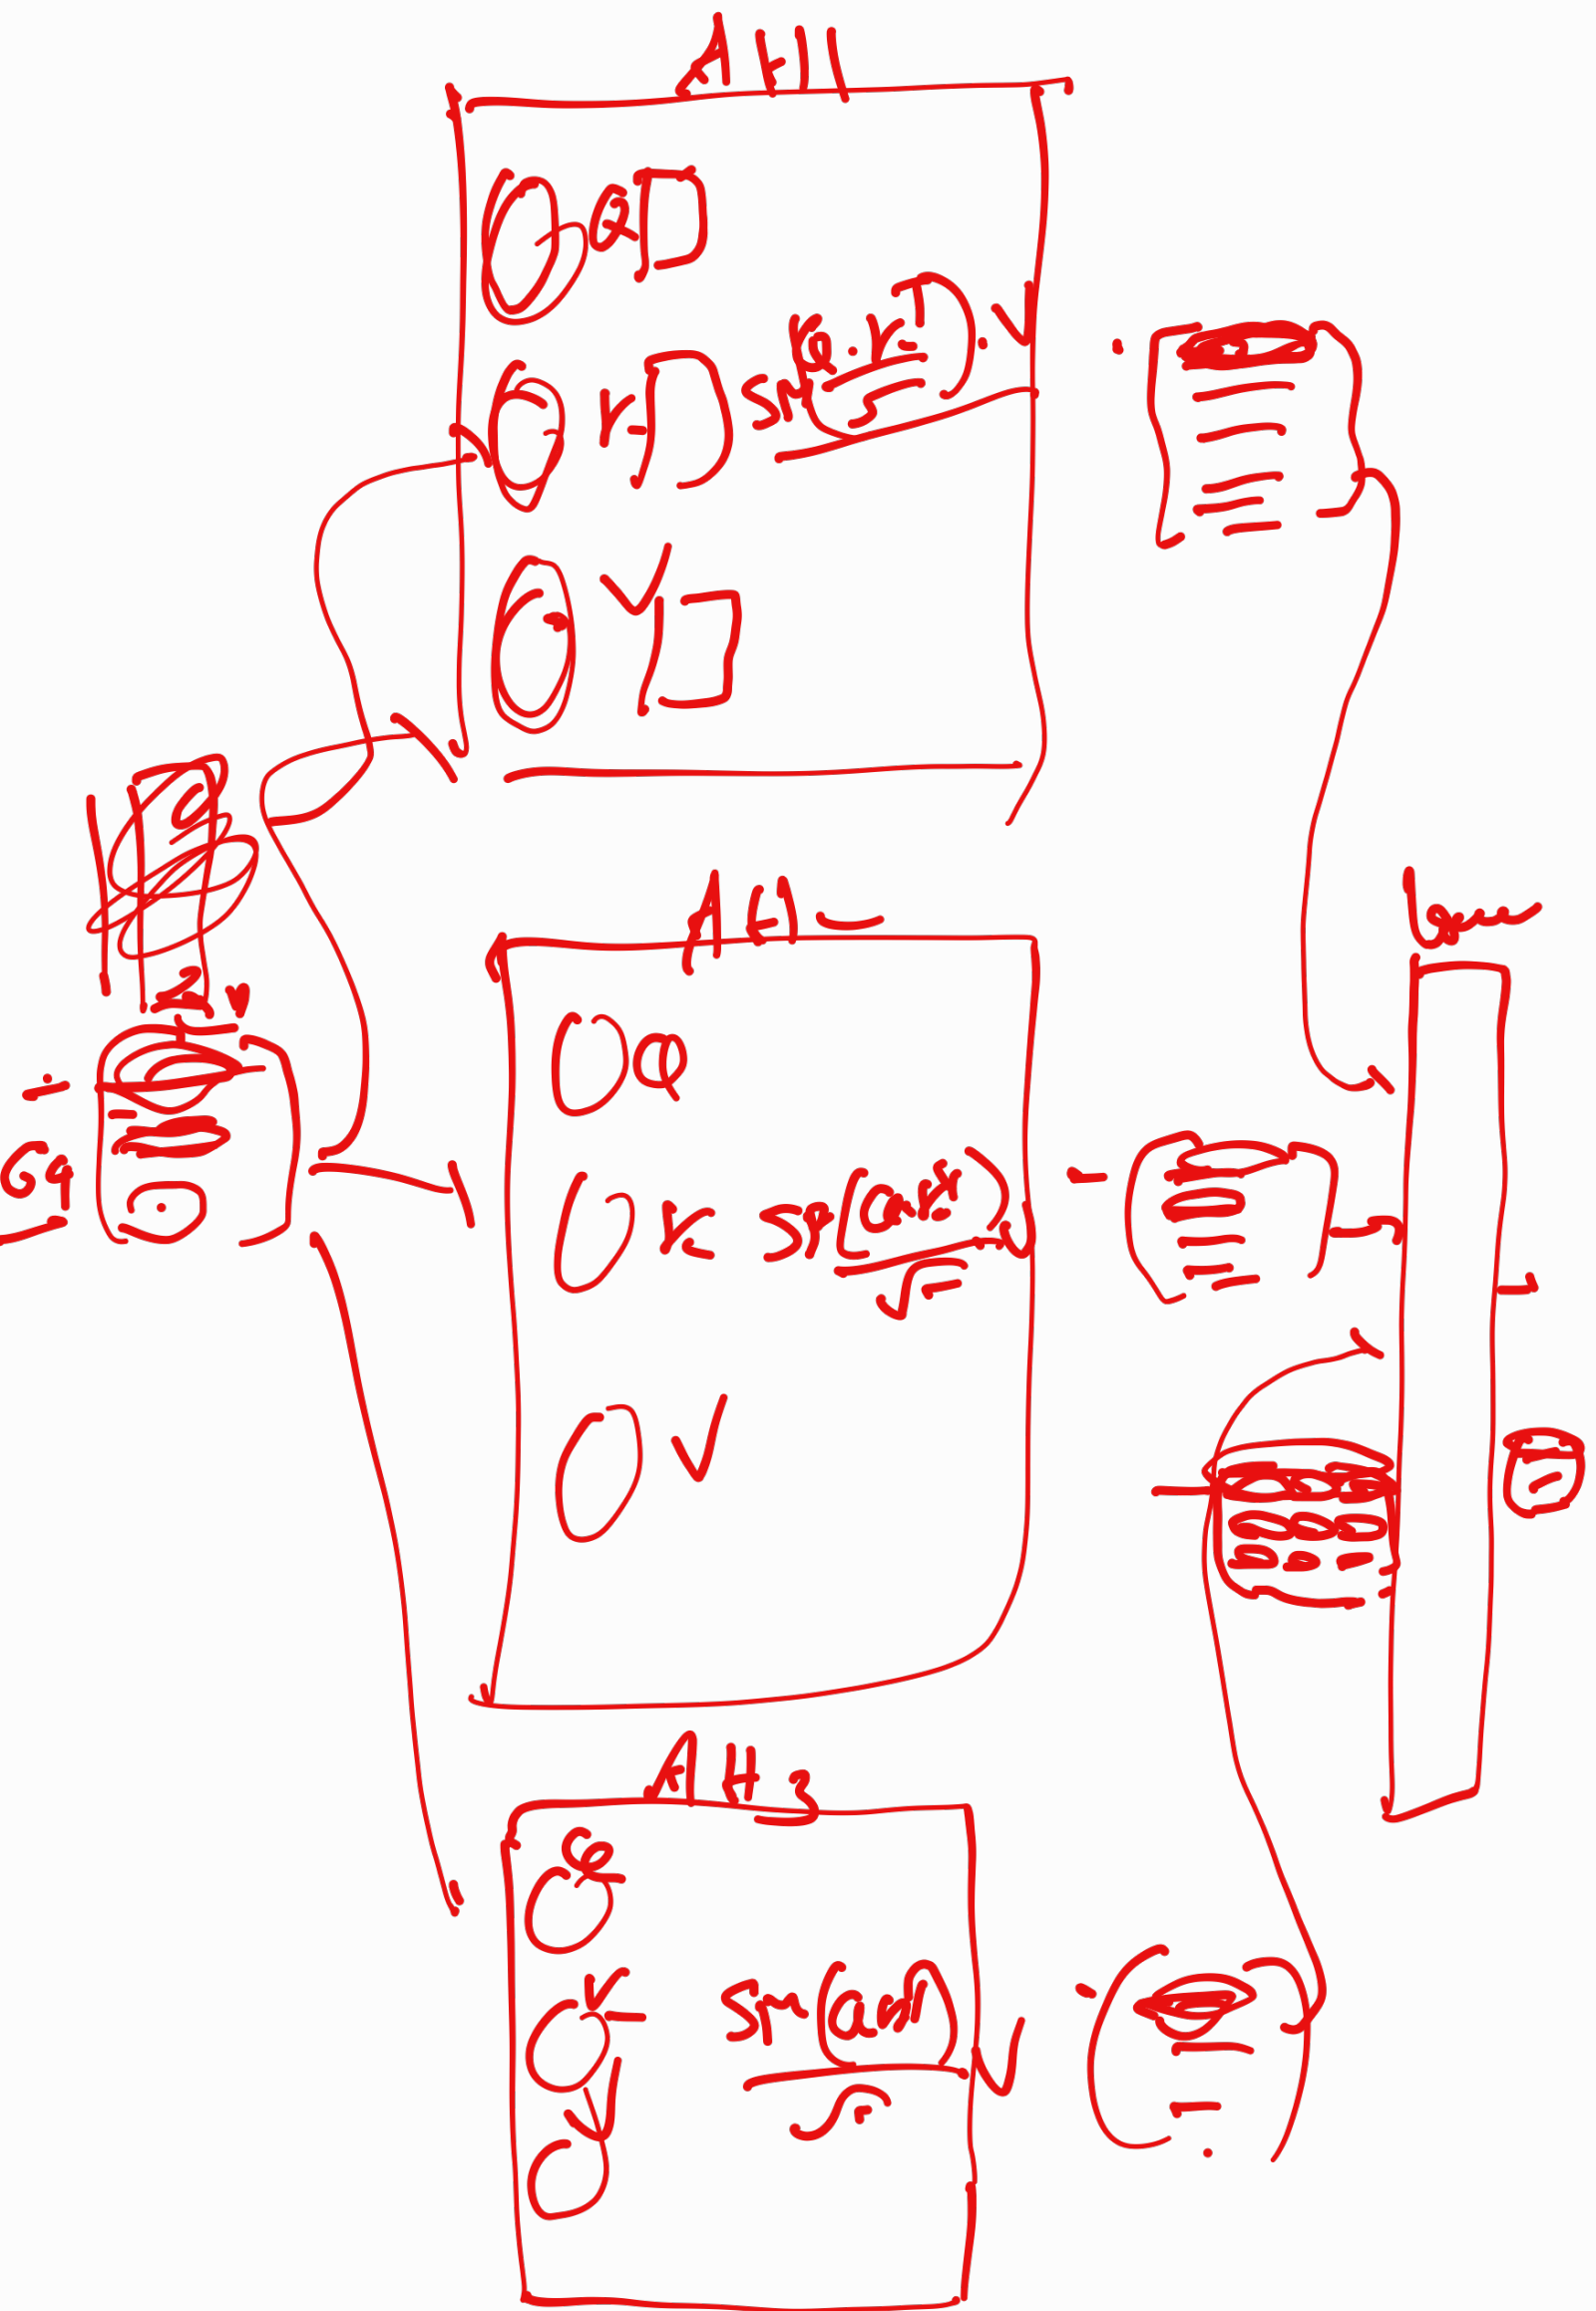


~~1205 (120)~~

(120) Term & Span (120)

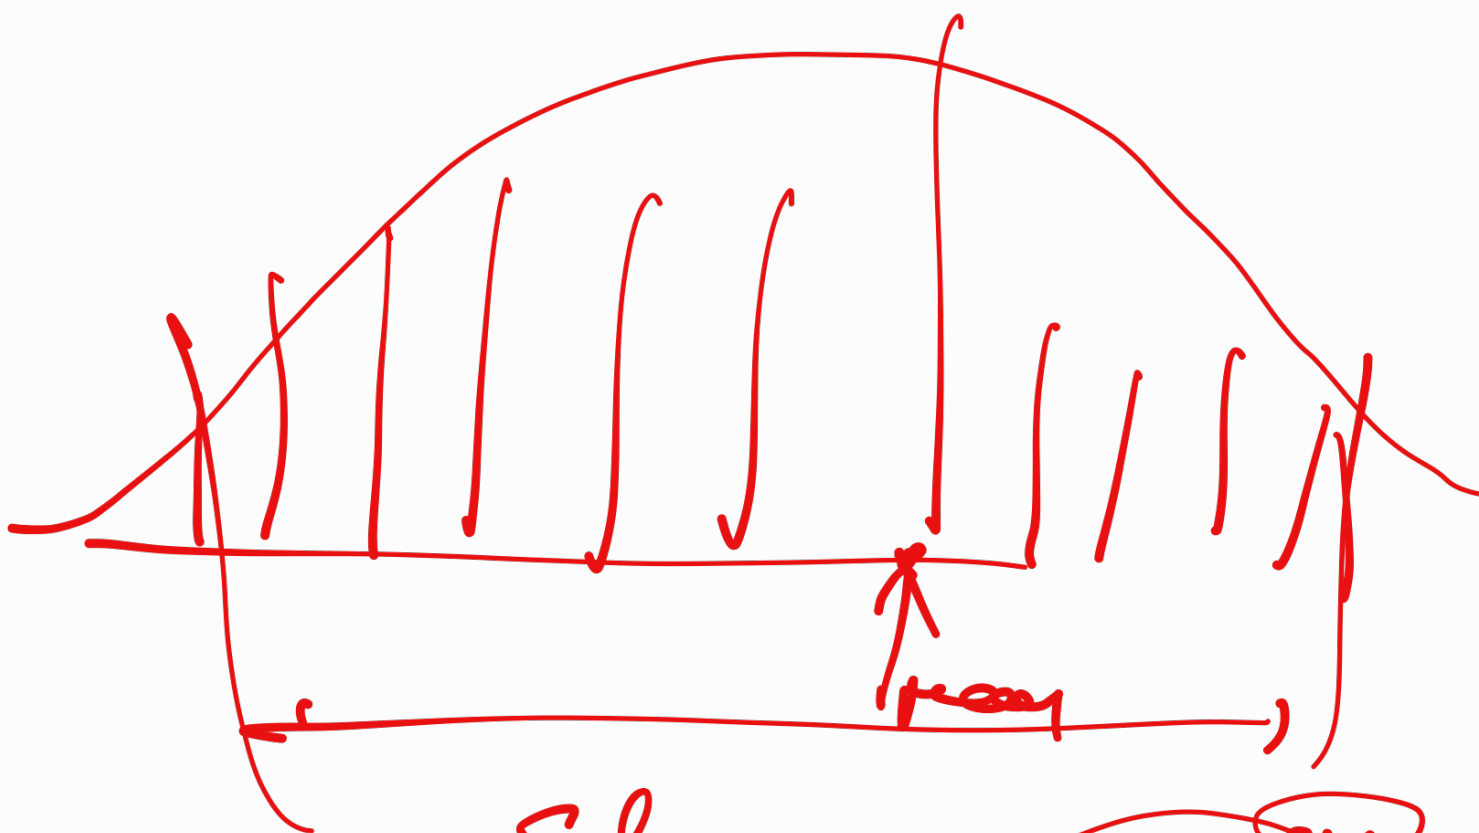

sd

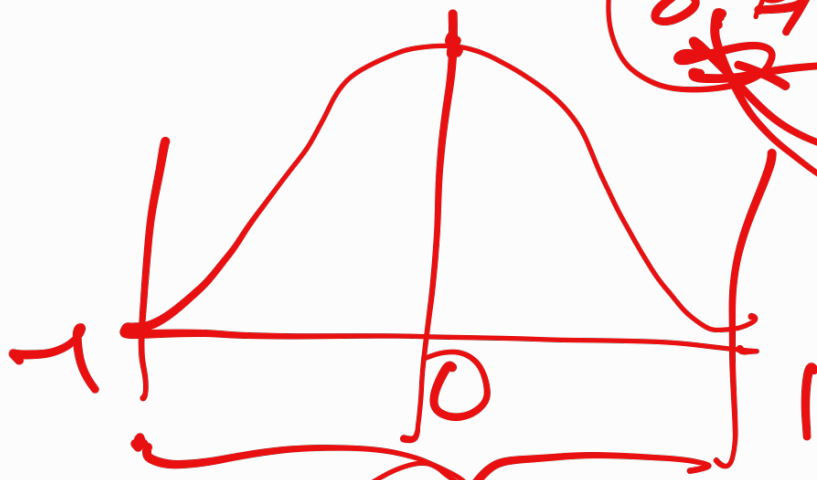

1 unit sd :- 1

$$\frac{x - \bar{x}}{s_x}$$
 ✓



$$\frac{e^2}{1.1}$$
 ✓

i am live here





.....



decolor architecture

like



1 leg

the domain

instruction type


proficiency

post team

~~Adaptation~~
~~unlike~~



1 leg + agent + hands

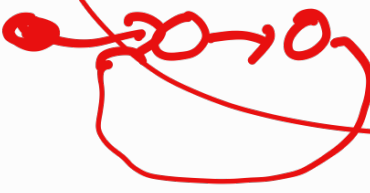

AI

same team

1 Center
→ her

