LaB-3

Date: _____

(16+7)%2-1 → 0

12/(10-6) → 3

(19-3)*(2+2)/4 → 16

Task: 3

(i)
```
#include <iostream>
Using namespace std;
int main() {
  int unit: 5;
  float mas : 2.5f;
  double weight;
  weight = mas* unit;
  cout << "unit(int) "<<units<<endl;
  cout << "mass(float)" << mass <<endl;
  cout << "weight(mass*units) double me"
    << weight << endl;
  return 0
}
```

output

```
unit(int):5
mass(float):2.5
weight(mass*units) double
me: 12.5
```

Task: 4

A: 8.4 B: 8 C: 0 D None of above

correct answer is B: 8

Input

```
#Include <iostream>
using namespace std;
```

LAB:3

LAB:3

Date:

```
int main() {
  int a, b=2;
  float c=4.2;
  a = b*c;
  cout << "b" << b << endl;
  cout << "c" << c << endl;
  cout << b*c << b*c << endl;
  cout << "a" me store hua"
}
```

Output

b=2, c=4.2
b*c = 8.4
a me store hua=8

Task: 5

```
#include <iostream>
using namespace std;
int main() {
  int qty = 7;
  int Sales Reps : 2;
  double unit Each;
  Unit Each = qty/sales Reps;
  Cout << ~~this~~ "without casting": << unit each << endl;
  unit each : static_cast <double> (qty) / salesReps;
  Cout << "with casting" << units each << endl;
}
```

Output

without casting : 3
with casting : 3.5

LAB: 3

Date: _____

Task: 6

```
#Include <iostream>
  Using namespace std;
  int main() {
  int num1 = rand() %. 900+100;
  int num2 = rand() %. 900 +100;
  int answer=num1 +num2;
  cout<< "solve this addition problem:\n\n";
  cout<<"   " << num1 <<endl;
  cout<<" + " << num2 <<endl;
  cout<<"  ..." num 2<<endl;
  cout<<"  ..." <<endl;
  cin get();
  cout <<"\n correct solution\n\n";
  cout<<"   " <<num2 <<endl;
  cout<<" + "unum2 "endl;
  cout<<"  ..." endl;
  cout<<"   " << answer <<endl;
  }
```

Output

```
 555
+978
 ----
```

LAB:3

Date:

Home tasks

Task: 1

```
#include <iostream>
using namespace std;
int main() {
double number1 = 15.5;
double number2 = 10.2;
  double sum;
sum = number1+number2;
cout << "first number" << Number1 << endl;
cout << "Second number" << Number2 << endl;
cout << "The sum of the two number" << sum << endl;
  return 0;
}
```

Output

```
First number: 15.5
Second number: 10.2
The sum of the two
number is 25.7
```

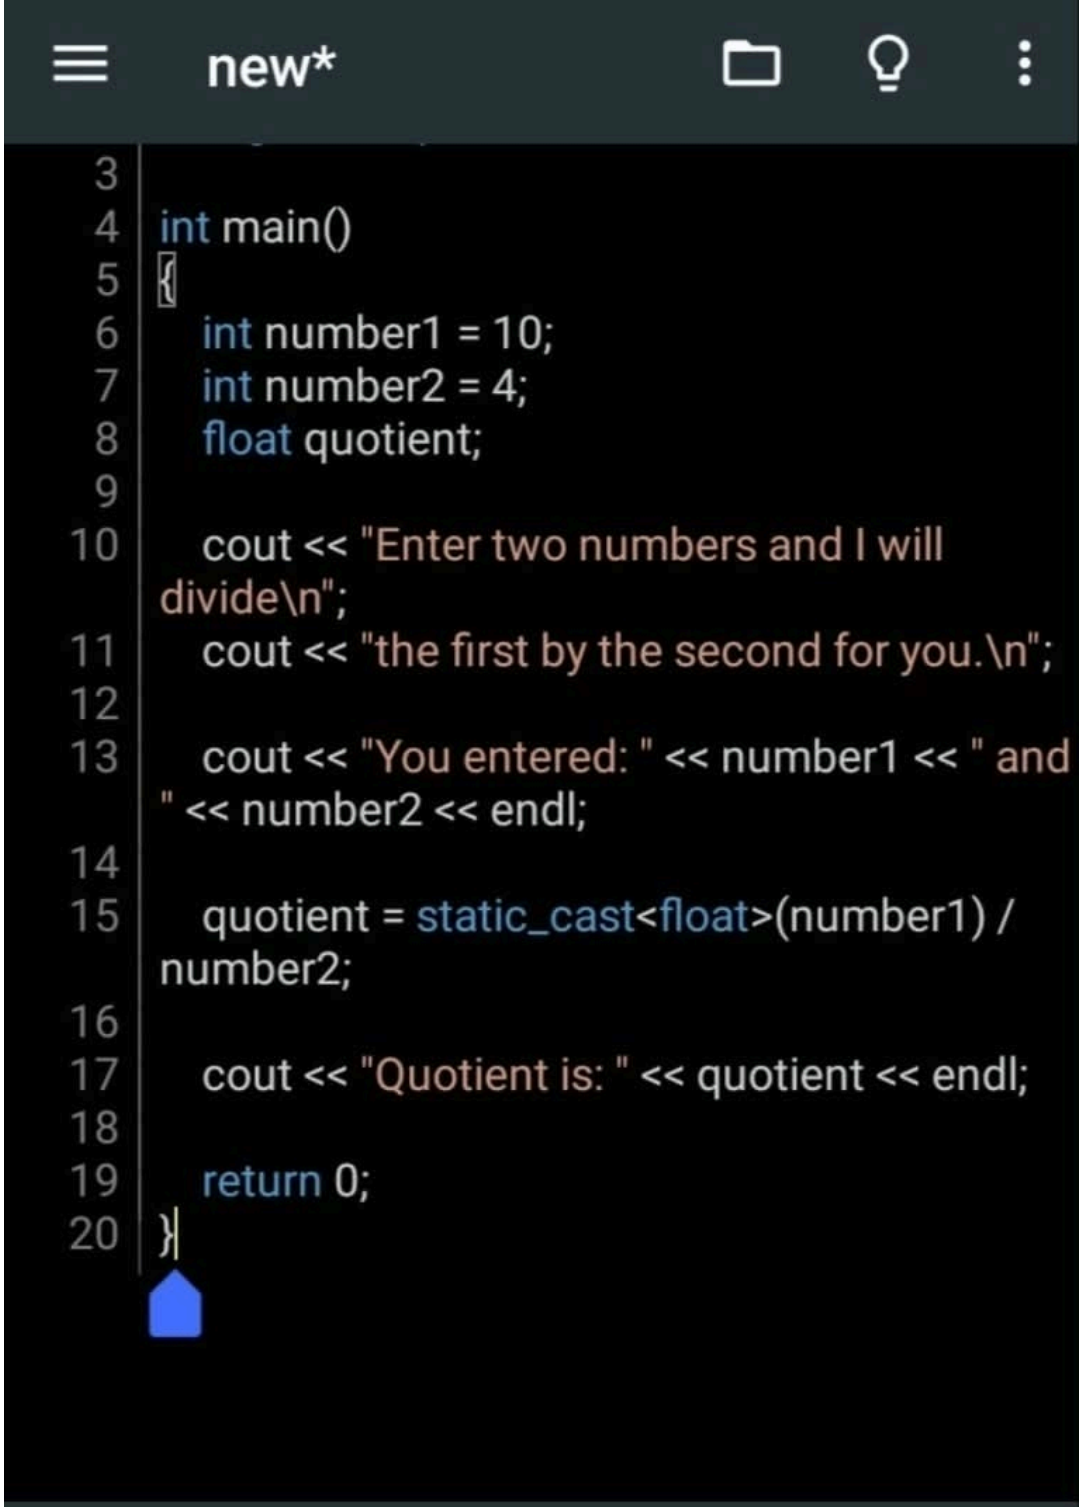
Task: 2

```
#include <iostream>
using namespace std;
int main() {
int number1 = 10;
 int number2 = 4;
 float quotient;
cout << "Enter two number and I will divide\n";
cout << "the first by the second for you\n";
```

```
cout << " your entered " << number1 << " and " << number2 << endl;
  quotient = static_cast<float>(number1)/number2;
    cout << "Quotient" : << quotient << endl;
      return 0;
      }
```

Output

```
Enter two number and I will
divide the first by the second
    for you.
you entered : 10 and 4
  Quotient is : 2.5
```


new*
3
4 int main()
5 {
6 int number1 = 10;
7 int number2 = 4;
8 float quotient;
9
10 cout << "Enter two numbers and I will
divide\n";
11 cout << "the first by the second for you.\n";
12
13 cout << "You entered: " << number1 << " and
" << number2 << endl;
14
15 quotient = static_cast<float>(number1) /
number2;
16
17 cout << "Quotient is: " << quotient << endl;
18
19 return 0;
20 }
TAB
Enter two numbers and I will divide
the first by the second for you.
You entered: 10 and 4
Quotient is: 2.5
[Program finished]

new*

```cpp

#include <iostream>
using namespace std;

int main() {
    // Task 1 - Values put kar diye hain
    int age = 20;
    double pay = 4500.75;
    char section = 'A';

    cout << "Age: " << age << endl;
    cout << "Pay: " << pay << endl;
    cout << "Section: " << section << endl;
    cout << "----------" << endl;
}
```

TAB

```
Age: 20
Pay: 4500.75
Section: A
----------

[Program finished]
```

new*

```cpp
#include <iostream>
using namespace std;

int main(){
    int units = 5;
    float mass = 2.5f;
    double weight;

    weight = mass * units; // yahan automatic conversion hoga

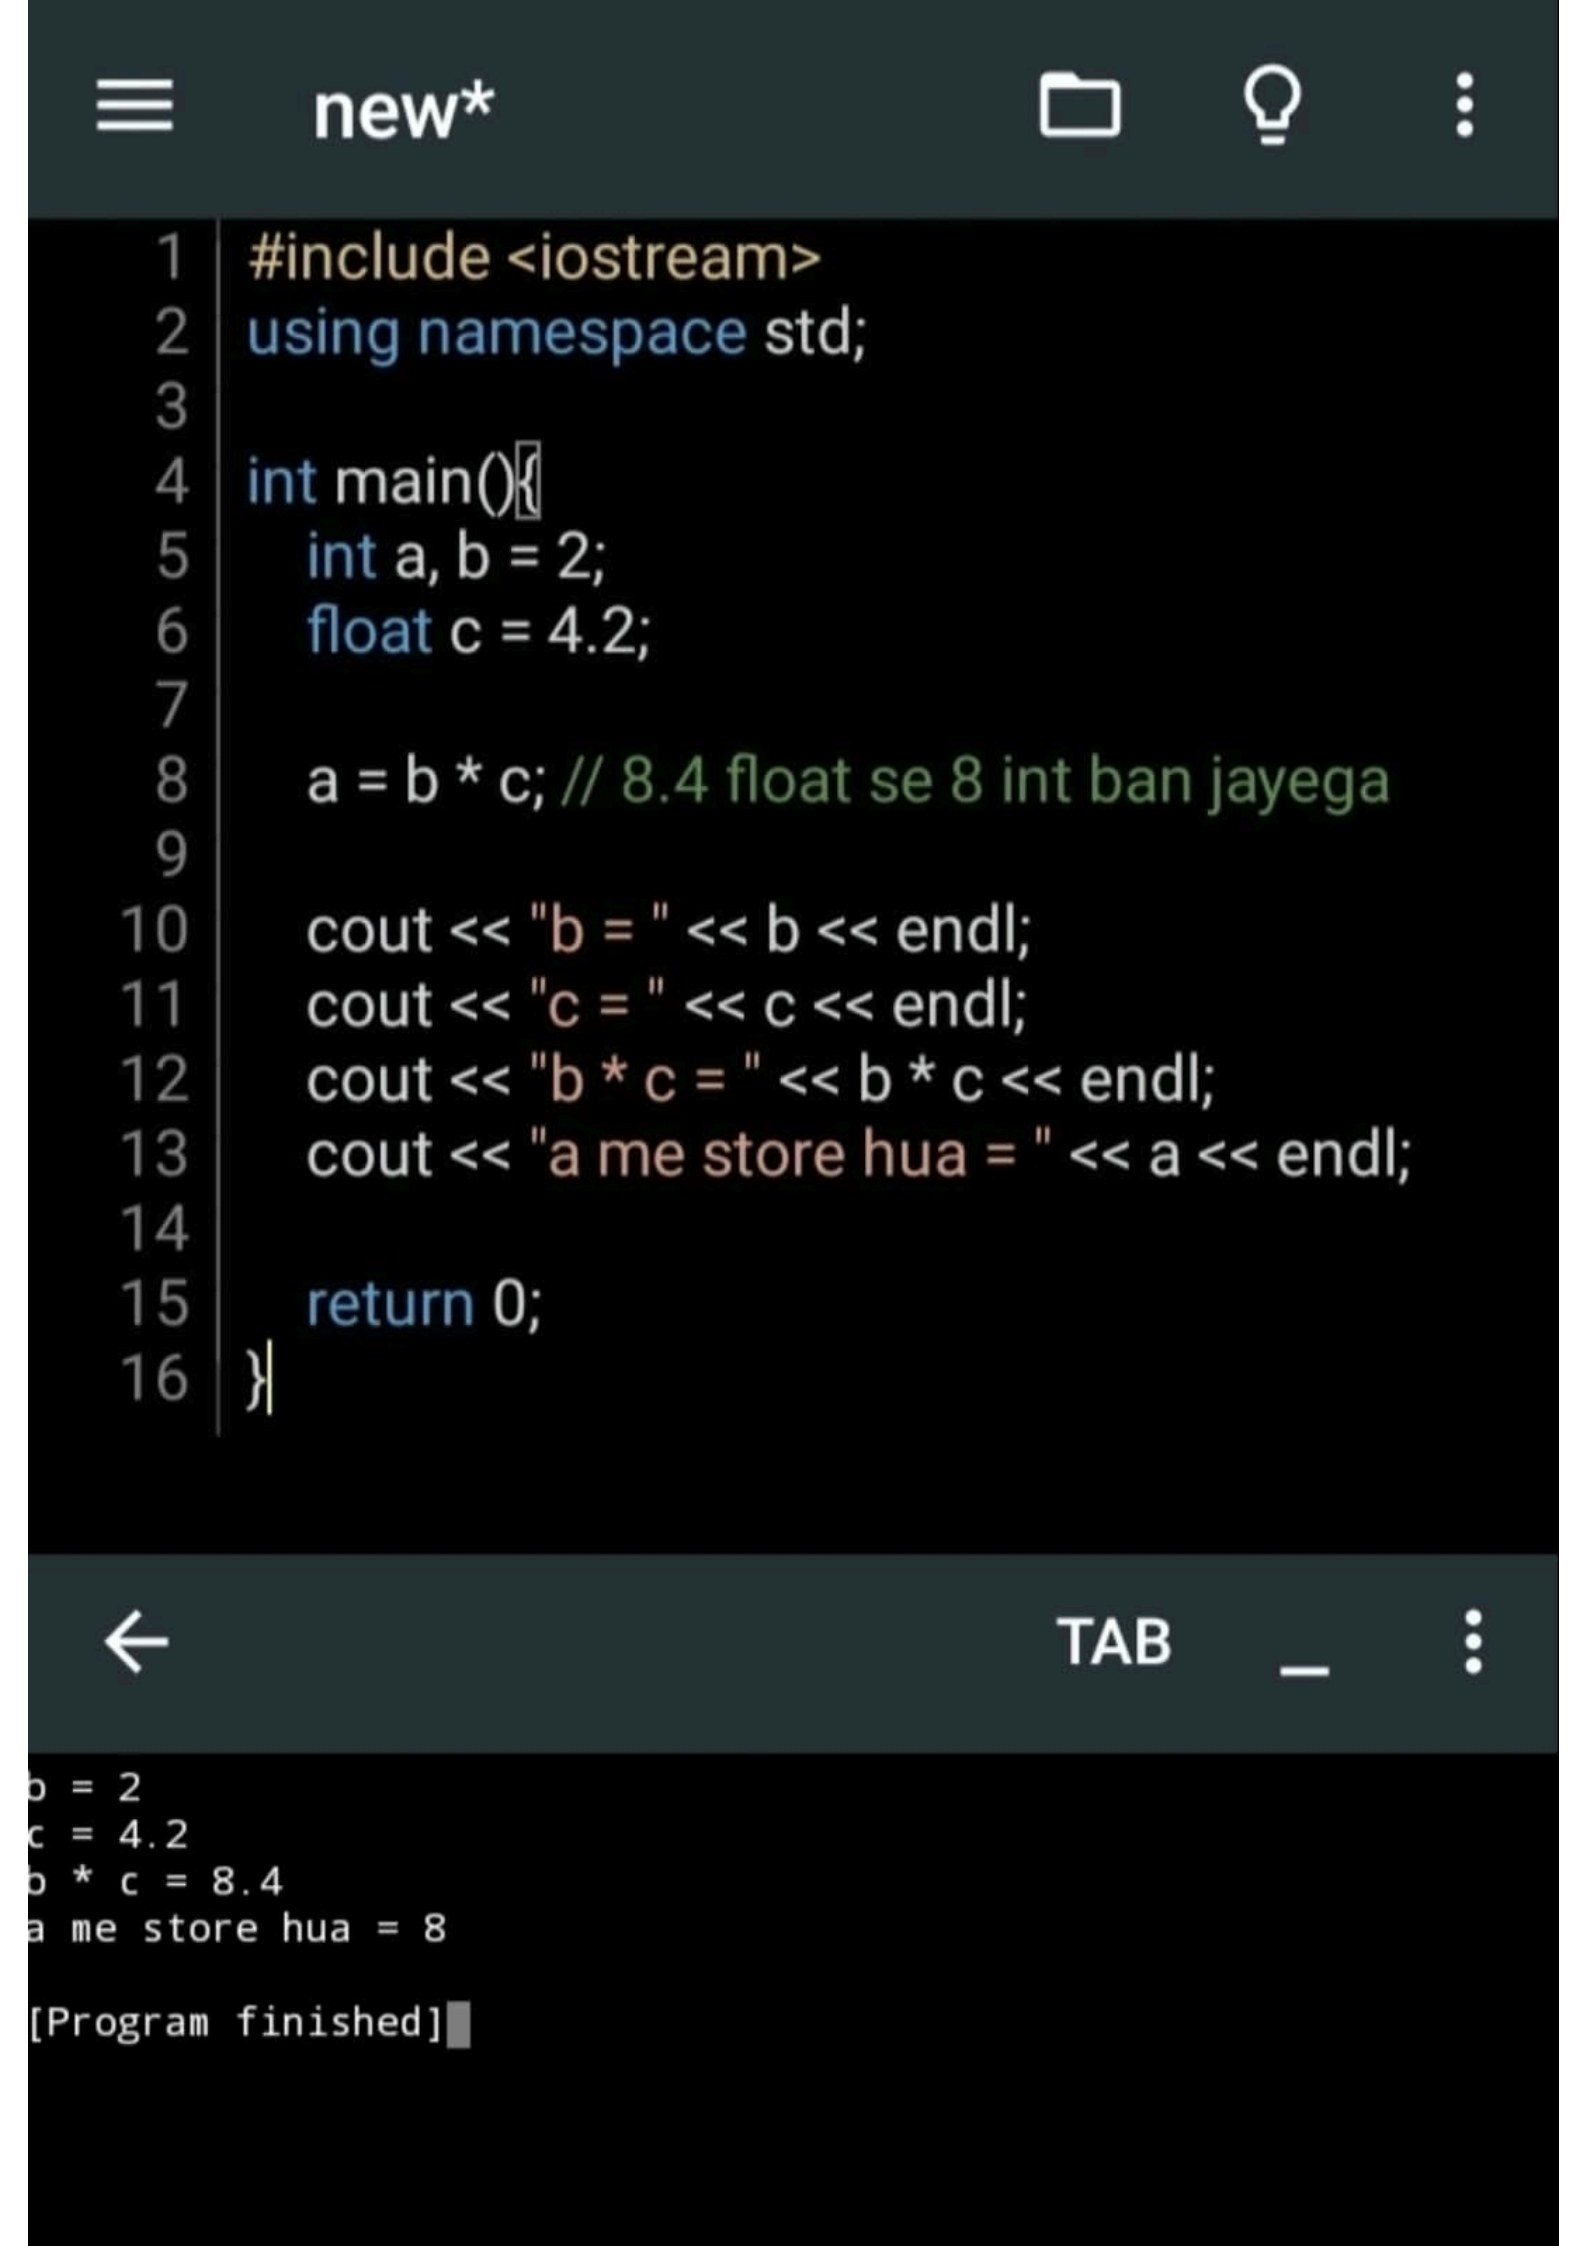
    cout << "units (int): " << units << endl;
    cout << "mass (float): " << mass << endl;
    cout << "weight (mass * units) double me: " << weight << endl;

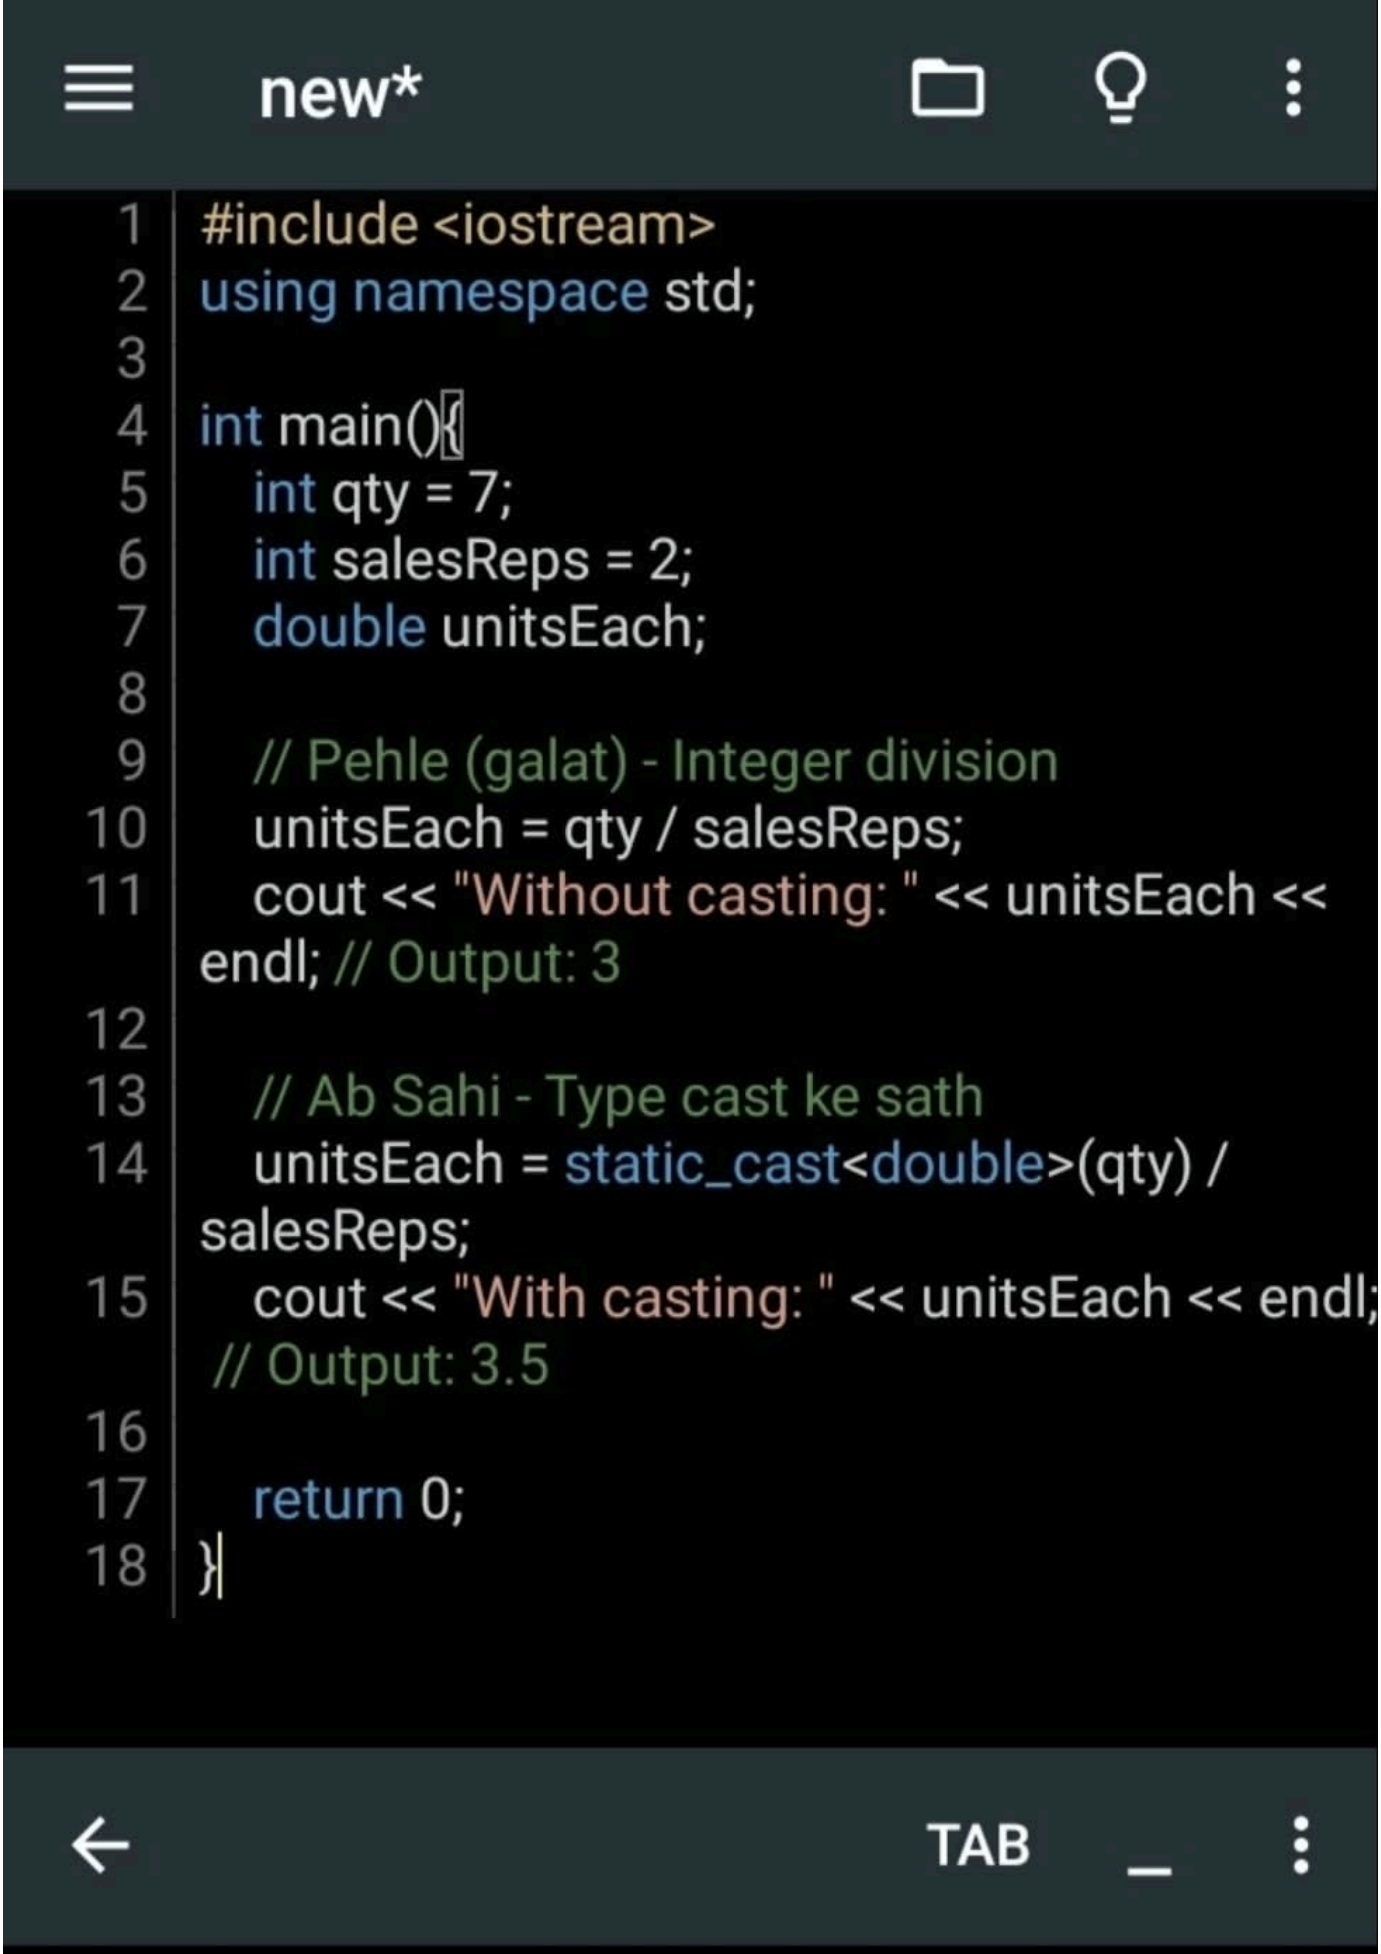
    return 0;
}
```

TAB

```
units (int): 5
mass (float): 2.5
weight (mass * units) double me: 12.5

[Program finished]
```


new*
TAB
1 #include <iostream>
2 using namespace std;
3
4 int main(){
5 int a, b = 2;
6 float c = 4.2;
7
8 a = b * c; // 8.4 float se 8 int ban jayega
9
10 cout << "b = " << b << endl;
11 cout << "c = " << c << endl;
12 cout << "b * c = " << b * c << endl;
13 cout << "a me store hua = " << a << endl;
14
15 return 0;
16 }
b = 2
c = 4.2
b * c = 8.4
a me store hua = 8
[Program finished]




```cpp
#include <iostream>
using namespace std;

int main(){
    int qty = 7;
    int salesReps = 2;
    double unitsEach;

    // Pehle (galat) - Integer division
    unitsEach = qty / salesReps;
    cout << "Without casting: " << unitsEach << endl; // Output: 3

    // Ab Sahi - Type cast ke sath
    unitsEach = static_cast<double>(qty) / salesReps;
    cout << "With casting: " << unitsEach << endl; // Output: 3.5

    return 0;
}
```

```
Without casting: 3
With casting: 3.5

[Program finished]
```

new*

```cpp
#include <iostream>
#include <cstdlib>  // rand() ke liye
#include <ctime>    // time() ke liye
using namespace std;

int main() {
    // Random number generator ko seed karna
    srand(time(0));

    // 100 se 999 tak 2 random numbers
    int num1 = rand() % 900 + 100;  // 100-999
    int num2 = rand() % 900 + 100;  // 100-999

    int answer = num1 + num2;

    // Problem display karna
    cout << "Solve this addition problem:\n\n";
    cout << "  " << num1 << endl;
    cout << "+ " << num2 << endl;
    cout << "------" << endl;

    // Pause - Student ke solve karne tak rukna
    cout << "\nPress ENTER when you are ready to check the answer...";
    cin.get();  // Enter press ka wait karega

    // Correct solution display karna
    cout << "\nCorrect Solution:\n\n";
    cout << "  " << num1 << endl;
    cout << "+ " << num2 << endl;
    cout << "------" << endl;
    cout << "  " << answer << endl;

    return 0;
}
```

TAB

```
Solve this addition problem:

  555
+ 978
--------

Press ENTER when you are ready to check the answer...
```

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    double number1 = 15.5;
    double number2 = 10.2;
    double sum;

    sum = number1 + number2;  // Yahan add ho raha hai

    cout << "First Number: " << number1 << endl;
    cout << "Second Number: " << number2 << endl;
    cout << "The sum of the two numbers is " << sum << endl;

    return 0;
}
```

TAB

```
First Number: 15.5
Second Number: 10.2
The sum of the two numbers is 25.7

[Program finished]
```

new*

```cpp
int main()
{
    int number1 = 10;
    int number2 = 4;
    float quotient;

    cout << "Enter two numbers and I will divide\n";
    cout << "the first by the second for you.\n";

    cout << "You entered: " << number1 << " and " << number2 << endl;

    quotient = static_cast<float>(number1) / number2;

    cout << "Quotient is: " << quotient << endl;

    return 0;
}
```

TAB

```
Enter two numbers and I will divide
the first by the second for you.
You entered: 10 and 4
Quotient is: 2.5

[Program finished]
```