

Does Hybridisation Pay? A Systematic Review of Metaheuristic Optimisation and Machine Learning Hybrids in Pavement Engineering (2005–2026)

Seyed Saber Naserlavi^{a,*}, Ali Reza Ghanizadeh^b

^a*Shahid Bahonar University of Kerman, Department of Civil Engineering, Kerman, Iran,*

^b*Sirjan University of Technology, Department of Civil Engineering, Sirjan, Iran,*

Abstract

PLACEHOLDER — structured abstract, ~280 words, written last so that every number in it traces to the audit. Do not draft this before Section 9 is final.

Keywords: pavement engineering, metaheuristic optimisation, machine learning, hybrid models, systematic review, methodological rigour

Draft status. This file renders to PDF, Word and HTML from one source. Sections marked *PLACEHOLDER* are not yet written. Every citation resolves against `references.bib`, which is generated from `data/seed_bibliography.csv`; a citation key that is not in the verified database fails the render rather than passing silently.

1. Introduction

Pavement engineering has, over the past decade, adopted a specific and recurring rhetorical move: an optimisation algorithm is coupled to a learning model, the coupled system is shown to out-predict some comparator, and the coupling itself is offered as the paper’s contribution. Grey wolf optimisers, whale optimisation, teaching-learning-based optimisation, forensic-based investigation, dipper-throated optimisation and dozens of similarly named metaheuristics have each, in turn, been married to a neural network, a support vector machine, an extreme learning machine or a gradient-boosted ensemble, and the resulting hybrid reported as an advance over the base learner alone. The pattern is now common enough that “hybrid” is arguably the single most frequent claim of novelty in the data-driven pavement literature of the 2020s.

This review asks a question that the pattern itself rarely answers: **relative to what, exactly, is the hybrid better?** A hybrid model is compared, almost without exception, against a base learner running with default or lightly-adjusted settings. It is compared far more rarely against the same base learner tuned

*Corresponding author

Email address: `naserlavi@uk.ac.ir` (Seyed Saber Naserlavi)

by a conventional procedure under a comparable search budget — the baseline that would isolate what the metaheuristic actually contributed. Where that comparison has been made, in the small number of cases we have located so far, the hybrid’s advantage over a properly tuned baseline shrinks, and sometimes reverses. Zeiada et al. [1] individually tuned eight learners, including deep architectures, against the Witczak and Hirsch mechanistic models for asphalt dynamic modulus; the winner was a tuned bagging ensemble, not a hybrid and not a deep network. Azam et al. [2] compared six swarm-optimised variants of one base learner against each other and report top-three results within a fraction of a percentage point of R^2 — a separation well inside what a different random seed would produce — but never against a conventionally tuned version of the same learner, so no premium can be read from the paper at all. These two studies, sitting side by side in the same sub-field, illustrate the gap this review sets out to measure at scale: **how often is the hybridisation premium — the gain attributable to the coupling itself, over a fairly tuned baseline — actually reported, and how large is it when it is?**

Answering this requires solving a prior problem, which turns out to be nontrivial in its own right: **finding the studies**. A literature search built on the word “hybrid” misses a substantial share of the relevant work, because many qualifying studies describe themselves with the vocabulary of optimisation rather than of hybridity — “optimised”, “improved”, “novel X–Y” or simply the two algorithm names side by side. Alhussan et al.’s dipper-throated-optimisation random forest for pothole classification is a case in point: widely cited, structurally a textbook metaheuristic-on-learner hybrid, and retrievable by a search on algorithm names but not reliably by a search on the word “hybrid” itself. Section 2 describes the algorithm-driven search design this observation motivates, and reports, as one of the review’s descriptive findings, what share of the eligible literature would have been missed by a label-driven search alone.

1.1. Positioning relative to the existing review literature

Prior reviews of artificial-intelligence methods in pavement engineering are numerous but occupy different territory, summarised in Figure 1. The most direct predecessor, Yang et al. [3], catalogues where neural networks have been applied across the pavement lifecycle; it stops at the MLP/CNN/RNN generation and does not treat hybridisation, optimisation coupling or methodological rigour as organising questions. Domain-specific vision surveys [4, 5, 6] cover distress detection in depth but do not extend to materials, structural evaluation or network-level decisions. Three very recent contributions come closer to the diagnosis this review develops, and each must be distinguished on its own terms rather than folded quietly into a single “gap” claim. Tamagusko and Ferreira name standardisation, interpretability and replicability as open problems specifically for roughness prediction on flexible pavements. M’harzi Alaoui et al. [7] describe an “interpretability paradox” and a lab-to-field gap across 180 soil-stabilisation studies. Closest of all, Jweihaan [8] conducts a PRISMA-ScR scoping review of 163 studies on explainable and interpretable machine learning specifically in asphalt pavement engineering, and proposes a five-layer appraisal framework — data

provenance, model performance, explanation quality, physical plausibility, decision utility — that overlaps conceptually with more than one domain of the instrument this review proposes in §10. The honest distinction is not that this territory is unoccupied; it is that Jweihaan’s review is organised around explainability as the object of study and conducted at scoping-review depth (breadth of coverage, not per-study methodological coding), whereas the present review is organised around hybridisation — the optimiser-learner coupling itself — as the object of study, uses a full systematic protocol with per-study rigour coding (leakage risk, external validation, baseline strength, search-budget parity), and reports the coded audit as a quantified premium rather than as a coverage synthesis. Interpretability is one of several PAVE-ML domains in this review, not its organising question; the two instruments are complementary rather than competing, and §10 states explicitly where PAVE-ML’s interpretability items and Jweihaan’s five-layer framework agree and where they diverge. What none of these three contributions does — and what remains this review’s distinguishing claim — is define hybridity structurally rather than lexically so that algorithm-vocabulary studies are not missed, code a consistent rigour rubric across the full range of pavement sub-domains rather than one at a time, and convert the resulting evidence into a quantified premium and a reusable reporting instrument built around that specific construct.

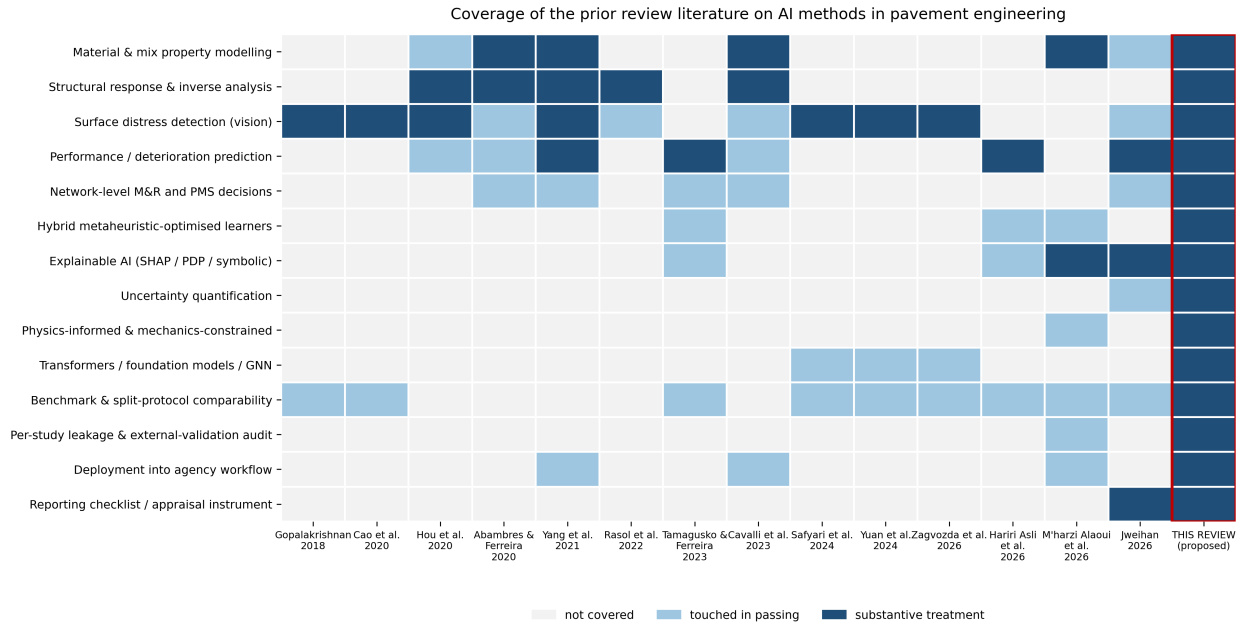


Figure 1: Coverage of the prior review literature on artificial-intelligence methods in pavement engineering. Scoring: 2 = substantive dedicated treatment, 1 = touched in passing, 0 = absent. “This review” is scored on stated scope, to be verified against the completed manuscript at submission.

1.2. Contributions

This review makes four contributions. First, a **structural rather than lexical** definition of hybridity (§2.3) and an algorithm-driven search protocol built to retrieve studies regardless of how their authors chose to describe them. Second, a **taxonomy of seven hybridisation types** (H1–H7, §4), each with a stated theoretical justification and a characteristic failure mode, replacing the field’s undifferentiated use of “hybrid” as a single label. Third, an empirical estimate of the **hybridisation premium** — the performance gain attributable to hybridisation once the comparison is made against a fairly tuned baseline — reported as a distribution across the coded corpus rather than as a single number, since most studies do not report the comparison required to compute it at all (§9). Fourth, a reporting and appraisal instrument, **PAVE-ML**, extending a general data-driven-pavement-model checklist with four items specific to hybrid pipelines (§10), so that the next study in this field can report what this review finds missing from most of the last two decades of it.

2. Review methodology

Full draft in docs/02_MANUSCRIPT_S2_methodology.md; transferred here section by section as each is finalised.

2.1. Scope and framing question

This review asks how much of the performance gain attributed to hybridisation in the pavement literature survives a fair comparison against a properly tuned base learner. The question differs from “where has hybridisation been applied” — the question earlier surveys answer — in that it requires reading each study for a specific comparison rather than for topical coverage, and it requires a definition of hybridity that does not depend on the authors’ own labelling (§2.3).

2.2. Information sources and search

Records were identified from OpenAlex, Scopus, Web of Science Core Collection and Semantic Scholar, with backward and forward snowballing from the 15 prior reviews listed in Table 1. The window runs from 1 January 2005 to 30 June 2026.

Table 1: Prior reviews of artificial-intelligence methods in pavement engineering, with the territory each occupies.

Review	Year	Venue	Territory
Gopalakrishnan	2018	Data	distress-detection
Cao et al.	2020	IEEE Access	distress-detection

Table 1: Prior reviews of artificial-intelligence methods in pavement engineering, with the territory each occupies.

Review	Year	Venue	Territory
Hou et al.	2020	Engineering	structural-evaluation/distress-detection
Abambres et al.	2020	TechRxiv (preprint)	all
Yang et al.	2021	J. Traffic Transp. Eng. (Engl. Ed.)	all
Rasol et al.	2022	Constr. Build. Mater.	structural-evaluation
Cavalli et al.	2023	J. Road Eng.	all
Tamagusko et al.	2023	Infrastructures	performance-prediction
Deng et al.	2023	J. Infrastruct. Preserv. Resil.	performance-prediction
Yuan et al.	2024	Remote Sensing	distress-detection
Safyari et al.	2024	Sensors	distress-detection
M’harzi Alaoui et al.	2026	J. Umm Al-Qura Univ. Eng. Archit.	materials
Zagvozda et al.	2026	Adv. Civ. Archit. Eng.	distress-detection
Hariri Asli et al.	2026	J. Infrastruct. Preserv. Resil.	performance-prediction
Jweihaan	2026	Applied System Innovation	materials/performance-prediction

2.3. Eligibility

Structural definition of hybridity. A study is in scope if its predictive pipeline couples two or more components drawn from different methodological families, at least one of which is a learned data-driven model, where the coupling is claimed or demonstrated to affect predictive performance. Three operational clarifications resolve most borderline cases. Hyperparameter search counts as hybridisation only when the search procedure is itself a metaheuristic or a surrogate-based optimiser (e.g. particle swarm optimisation, a genetic algorithm, Bayesian optimisation, a tree-structured Parzen estimator); manual tuning and exhaustive grid search do not qualify a study as hybrid, though both are recorded, since they are the baseline against which the premium (§9) is measured. An ensemble of models from a single family (e.g. a random forest) is not a hybrid; a stacked ensemble with heterogeneous base learners is (type H5, §4). Self-description is irrelevant

in both directions: a study is included or excluded on the structure of its pipeline, never on whether the authors used the word “hybrid”.

This structural test was necessary, not a refinement for its own sake. A pilot search restricted to hybrid-labelled vocabulary failed to retrieve at least one widely cited, structurally qualifying study — a dipper-throated-optimisation random forest for pothole classification [9] — while an algorithm-name-driven search retrieved it immediately. The same algorithm-name search, however, drifted heavily into adjacent domains (geopolymer concrete, rock-burst prediction, blasting-induced flyrock, and battery remaining-useful-life studies all appeared for generic swarm-optimisation queries), which is why every query in the harvesting protocol (`analysis/harvest_openalex.py`) carries a mandatory, hard-filtered pavement-domain term rather than relying on the optimisation vocabulary alone.

Peer review and language. Peer-reviewed journal articles and full conference papers in English are eligible. Preprints are excluded unless a peer-reviewed version is traced; where cited as grey literature (e.g. [10]) that status is stated explicitly.

Exclusions that shaped the corpus. Three exclusions recur often enough to state here rather than only in the PRISMA log. Non-neural, non-metaheuristic machine learning without any coupled component — a single tuned random forest or gradient-boosted tree, for instance — is not itself in scope, but is retained in a context set where it serves as a same-paper tuned-baseline comparator (this is, in fact, where several of the review’s most useful premium comparisons come from — see [1] and [11]). Studies where a metaheuristic and a learner are each named in the title but run as separate, non-interacting competing models rather than coupled into one pipeline are excluded from the hybrid corpus proper under the structural test above, and are flagged as an instance of the vocabulary trap in reverse — the label suggests a hybrid that the method does not deliver (e.g. [12], titled around “genetic algorithm and artificial neural networks” but reporting the two as independently competing models). Reinforcement-learning formulations for network-level maintenance and rehabilitation decisions (e.g. [13]) coordinate a learned policy with a simulated or predicted environment in a way that does not map cleanly onto the H1–H7 taxonomy, which is built around single-prediction pipelines; these are retained as context for §9 and §11 rather than coded into the taxonomy.

3. Bibliometric landscape

Of the 68 primary studies coded so far, Figure 2 shows their distribution across the seven hybridisation types defined in §4. A substantial share — 23 of 68 — do not qualify as hybrid under the structural test in §2.3 despite frequent adjacency to hybrid work in citation networks and, in a few cases, despite carrying “hybrid” or an optimiser name in the title while running the two components as separate, non-interacting models (§2.3). This is an early indication, not yet a corpus-wide estimate, of how much daylight exists

between the field’s vocabulary and its actual methodological content; §9 returns to the consequence of that gap for the premium estimate.

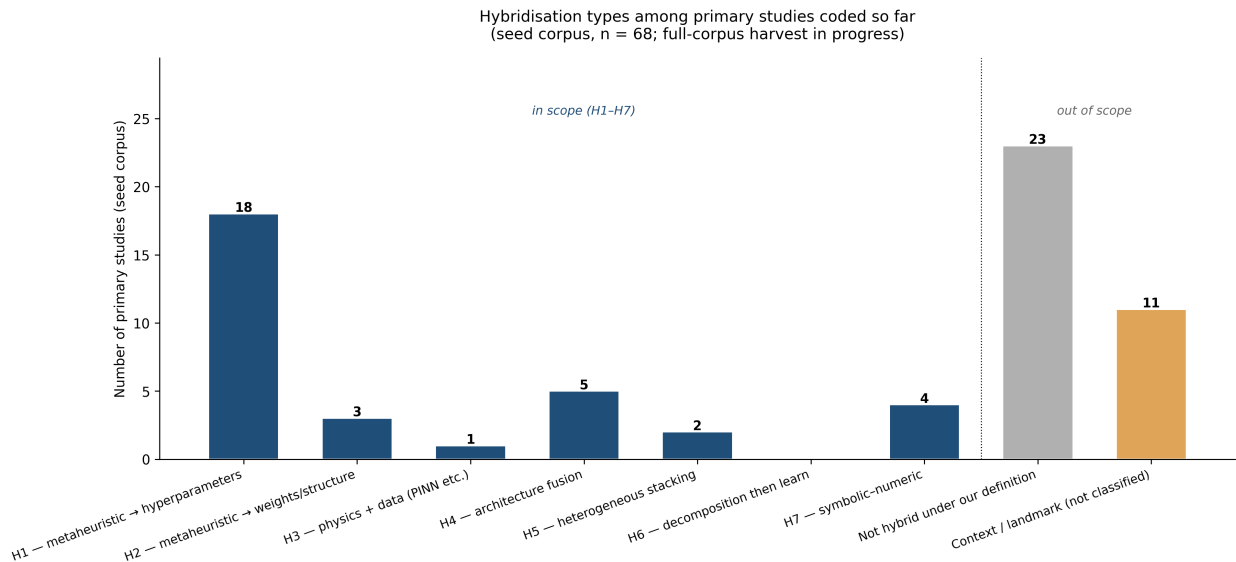


Figure 2: Distribution of hybridisation types among primary studies coded in the seed corpus.

Figure 3 shows the same primary studies by publication year. The visible concentration after 2020 is consistent with the review’s opening claim that hybridisation-as-novelty accelerated through the current decade, but the figure must be read as what it is — the yield of targeted, taxonomy-driven searches run during protocol development, not a random or exhaustive sample — and it is captioned accordingly rather than presented as a bibliometric trend claim the seed corpus cannot support on its own.

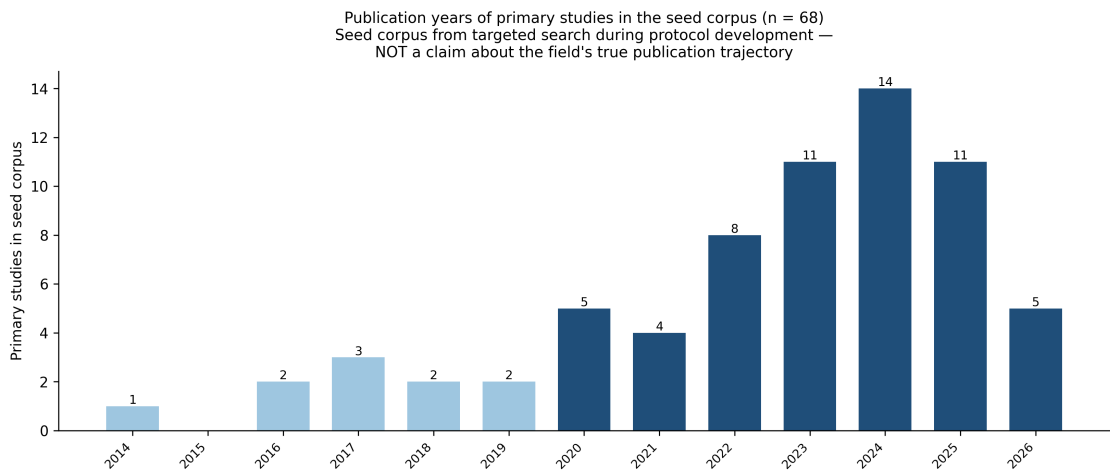


Figure 3: Publication years of primary studies in the seed corpus. This is a targeted-search yield, not a claim about the field’s true publication trajectory; the completed harvest will supersede this figure.

4. Taxonomy of hybridisation

The field’s literature treats “hybrid” as a single, undifferentiated label. This flattens together couplings with different theoretical justifications and, correspondingly, different characteristic failure modes — a metaheuristic searching a hyperparameter space is a different claim from a metaheuristic searching a weight space, and a different claim again from a physics-constrained loss function. Table 2 sets out the seven types this review distinguishes and codes against.

Table 2: Taxonomy of hybridisation in data-driven pavement models (H1–H7).

Type	Coupling	Theoretical justification	Characteristic failure mode
H1	Metaheuristic → hyperparameters	Searches a non-convex, discrete hyperparameter space that gradient methods cannot address	Compared against an untuned base learner, so the reported gain is the tuning, not the metaheuristic
H2	Metaheuristic → weights / structure	Escapes local minima of backpropagation; permits non-differentiable objectives	Vastly more function evaluations than the baseline receives, with no compute-parity reporting
H3	Physics + data (PINN, mechanistic residual, transfer function as loss)	Constrains the solution to a mechanically admissible manifold; aids under data scarcity	Physics-term weight tuned on the test set; constraint too weak to bind in practice
H4	Architecture fusion (e.g. CNN+transformer, two-stream)	Complementary inductive biases – local texture and long-range context together	Gains confounded with parameter count and training budget rather than the fusion itself
H5	Heterogeneous stacking / blending	Decorrelated errors across model families reduce variance	Meta-learner trained on in-fold predictions; leakage through the stacking layer
H6	Signal decomposition then learn (VMD, EMD, CEEMDAN, wavelet)	Separates scales the learner would otherwise have to disentangle unaided	Decomposition fitted on the full series before the temporal split – the most common severe leakage in this family
H7	Symbolic–numeric (GEP, MGGP, EPR + a numeric optimiser)	Yields a closed-form, inspectable expression rather than an opaque model	Expression complexity uncontrolled; an overfit equation is then read as if it were physics

Two coding notes follow directly from applying this taxonomy to the seed corpus. First, a single study

can legitimately receive more than one code — [14] fits both a GA-derived symbolic equation (H7-adjacent) and an ANN whose weights are set by the same GA (H2) on the same data, which is precisely the kind of within-paper comparison §9 is built to exploit. Second, several studies that use metaheuristic or architecture-fusion vocabulary in their titles fail the structural test on inspection — [12] names both a genetic algorithm and an artificial neural network but reports them as independently competing models rather than a coupled pipeline, and is coded `none` rather than any of H1–H7 as a result. Both notes matter for the same reason: the taxonomy is applied to what a pipeline *does*, not to what its title or abstract *calls* it.

Reinforcement-learning approaches to network-level maintenance-and-rehabilitation policy [13, 10] sit adjacent to this taxonomy but are not coded into it: they couple a learned policy to a simulated or predicted environment in a way that does not map onto the single-prediction-pipeline structure H1–H7 assumes. They are retained as context for the decision-consequence discussion in §11 rather than folded into the hybridisation-type counts in §3.

5. Hybrid models in material and mix modelling

Material-property modelling is the sub-domain where the seed corpus shows the heaviest concentration of H1 (metaheuristic-tuned hyperparameters) and H7 (symbolic–numeric) activity, and it is also where the tuned-baseline problem identified in §9 is most visible, because the target properties — resilient modulus, dynamic modulus, unconfined compressive strength, air-void content — are exactly the properties for which competitor mechanistic or empirical models already exist and are routinely, though not universally, available for comparison.

The resilient-modulus literature illustrates both the promise and the recurring weakness. Ghorbani et al. [14] fit two related models on the same repeated-load triaxial dataset — a genetic-algorithm-derived symbolic equation and an ANN whose weights the same genetic algorithm sets (H2) — and report the hybrid ANN-GA model as the more accurate of the two, a rare instance in the corpus of a true head-to-head comparison between two hybridisation types on identical data rather than between a hybrid and an unspecified baseline. Azam et al. [2] instead compare six swarm-optimised variants of a single base learner (LSSVM) against one another; the top three separate by RMSE values of 6.72, 6.78 and 6.79 MPa and R^2 values of 0.942, 0.940 and 0.940 — a spread well inside what a different random seed would plausibly produce — and none is compared against a conventionally tuned, non-hybrid LSSVM, so no premium is computable from the paper as published (§9). Kaloop et al. [15] report a similar optimiser-held-constant, learner-varied design (PSO-ANN vs. PSO-ELM vs. kernel-ELM), useful for isolating base-learner choice but not, by itself, for isolating the optimiser’s contribution.

The clearest positive exemplar in this section is not a hybrid at all in the H1–H7 sense: Zeiada et al. [1]

individually tune eight learners, including deep architectures, and benchmark every one of them against the Witczak 1-40D and Hirsch mechanistic models for dynamic modulus. Under that design, the winner is a tuned bagging ensemble — not a hybrid and not a deep network — which is precisely the finding a hybridisation-premium framework should produce when tuning is held fair across all competitors, and it is the paper this review returns to repeatedly (§1, §9) as the standard the rest of the sub-domain should be read against.

On the symbolic side, Ghanizadeh et al. [16] fit a TLBO-optimised evolutionary polynomial regression and multi-gene genetic programming model (H7) for asphalt air-void evolution, producing a closed-form, inspectable expression rather than an opaque predictor — a property that recurs as a theme in §10’s discussion of what interpretability should mean for a validated, not merely a post-hoc-explained, model.

6. Hybrid models in structural evaluation and inverse analysis

Structural evaluation and inverse analysis — principally back-calculation of layer moduli from deflection data — is the sub-domain with the strongest example of external validation in the entire seed corpus, and for that reason anchors much of the argument in §11 as well as this section. Elbagalati et al. [17] train an ANN model on a Louisiana continuous-deflection programme and evaluate it on an independent Minnesota programme; R^2 falls only from 0.73 to 0.72 across that transfer, which is the benchmark against which the field’s more typical 0.99-on-random-holdout results should be read, and the paper is cited repeatedly in this review precisely because it is the exception rather than the rule.

Ghanizadeh and colleagues’ own back-calculation work traces a coherent five-year arc that this section follows in sequence: an ANN back-calculation model with Garson and connection-weight sensitivity analysis [18] establishes the baseline single-architecture approach with post-hoc interpretability; METABACKCAL [19] replaces the neural surrogate with a metaheuristic-driven inverse solver directly (H2, in the sense that the metaheuristic operates on the inverse problem itself rather than on a learned model’s hyperparameters), and is released as a named tool — one of very few entries in the seed corpus with deployment evidence beyond a closed-form equation. Reading the two together sets up a natural question for the completed review: does the metaheuristic-driven solver in the later paper report an accuracy gain over the earlier ANN surrogate under a comparable computational budget, and if so, of what size? That comparison is identified but not yet completed, since it requires a full-text extraction from both papers rather than the abstract-level record currently in the database.

Pasupunuri, Thom and Li [20] supply this review’s clearest H3 (physics-informed) exemplar, embedding the MEPDG roughness model itself as the physics-loss term of a PINN for jointed plain concrete pavement roughness — the single clearest published case in the corpus of a mechanics-constrained learner in pavement

engineering, and a useful counterpoint to the purely data-driven H1/H2 work that dominates the rest of this section.

7. Hybrid models in performance prediction

Performance and deterioration prediction — international roughness index, rutting, cracking, faulting, remaining service life — is the sub-domain most heavily dependent on the Long-Term Pavement Performance (LTPP) database in the seed corpus, and correspondingly the sub-domain where the near-duplicate-substrate problem named in the review methodology is most concrete rather than abstract. A single overlapping author team — Alnaqbi, Zeiada and Al-Khateeb, joined variously by Abuzwidah, Hamad and Barakat across different papers — has published at least eight studies located so far, all drawing on what appears to be the same approximately 33-section, 385–395-observation continuously-reinforced-concrete- pavement substrate from LTPP, each pairing a different metaheuristic (chiefly PSO or a genetic algorithm) with a different base learner (chiefly SVR or a gradient boosting machine) to predict a different single target variable — international roughness index [21, 22, 23], longitudinal cracking [24, 25], spalling [26], friction number [27], and punchouts [28] — each reported as a separate publication, each evaluated by five-fold cross-validation, and each reporting R^2 in the 0.90–0.99 range. Two pairs within this set differ from one another only in which metaheuristic tunes the same base learner on the same target and the same substrate: [24] (PSO-GBM) and [25] (GA-GBM) both predict longitudinal cracking; [21] (PSO-SVR), [22] (PSO-GBM) and [23] (GA-SVR) all predict IRI on what the papers describe as the identical 395-observation, 33-section pool.

None of this is concealed — [28]’s own reference list cites six other papers from the same series, so the pattern is not hidden, only undiscussed. What none of the eight papers examined so far states explicitly is whether the five-fold cross-validation in each is grouped at the section level, so that no CRCP section contributes observations to both the training and the test partition within a fold. With roughly twelve observations per section on average (395 observations across 33 sections), an ungrouped random split would place multiple, highly correlated records from the same physical section on both sides of most folds — precisely the leakage pathway the PAVE-ML rule for `leakage_risk` (§10) is written to catch, and precisely the reason each of these eight papers is coded **high** risk pending full-text confirmation rather than assumed innocent by the convention adopted in §2. Xiao et al.’s TPE-CatBoost faulting model [29] adds a second, independent instance of the same ambiguity on a different substrate: Boruta feature selection is described as preceding TPE hyperparameter tuning, but neither the paper’s abstract nor its available summary states whether Boruta was fitted on the training partition alone or on the full 160-observation pool before any split was made.

Two things distinguish this section’s treatment of the near-duplicate-substrate problem from a general methodological aside. First, the count is now large enough — eight identified papers, likely more once the

full harvest is complete — that the completed review can report a systematic finding rather than gesture at a concern: what fraction of this specific author team’s substrate-sharing series groups its cross-validation folds by section, once every paper’s methods section has been read in full. Second, the pattern usefully illustrates a broader point this review returns to in §11: an unlimited supply of near-identical papers reporting R^2 above 0.90 on the same underlying 33 physical objects, whatever its cause, produces exactly the appearance of a mature and thoroughly validated sub-field that the rigour audit is designed to test.

Deng and Shi’s practitioner-facing review of rutting models [30] adds a data point this review’s own audit cannot generate on its own: a survey of which rutting-prediction models highway agencies actually report using in practice. That detail belongs with the deployment-evidence discussion in §9 and §10 as one of the only direct looks, anywhere in the surrounding literature, at the demand side of the deployment gap this review otherwise infers only from what published papers do not report.

8. Physics-informed, fusion, stacking, decomposition and symbolic hybrids

The five hybridisation types beyond direct metaheuristic-hyperparameter coupling (H3–H7) are less numerous in the seed corpus than H1, but each supplies at least one clear exemplar worth setting out in detail because each illustrates a distinct failure mode that a reader unfamiliar with the taxonomy in §4 would not otherwise anticipate.

H4, architecture fusion, is best represented in the seed corpus by four vision and one network-level study. Sun et al.’s PCDETR [31] fuses a Swin-Transformer and a ResNet backbone for pavement crack detection and reports near-identical average precision on the authors’ own dataset and on COCO (45.6% vs. 45.8%) — a similarity close enough across two very different image domains to warrant scrutiny rather than to be read at face value as evidence of robust transfer. Alshawabkeh et al. [32] and Elhariri et al. [33] both couple deep and hand-crafted feature extraction with a metaheuristic feature-selection stage (jointly H1 and H4 under the taxonomy in §4), and both report a staged, within-paper ablation — deep features alone, then with the added classifier, then with the added optimiser — which is the design §9’s premium construct depends on and which most H1 studies elsewhere in the corpus do not provide. At the network rather than the image level, Pan, Du and Parlikad’s PaveGNet [34] fuses a graph module encoding inter-section topology with a temporal module encoding distress evolution, and is, at the time of writing, this review’s clearest example of the staged-ablation design done well: independently substituting the temporal, spatial and exogenous-variable components and reporting the ranking-error contribution of each (a fall from 9.005% to 2.670% for the full model against a spatiotemporal graph-convolution baseline). It is a useful positive counterpoint to place beside the H1 studies earlier in this section, and is the closest the seed corpus comes to network-level, rather than single-section, hybridisation evidence.

H5, heterogeneous stacking, has one clear positive and one ambiguous exemplar in the corpus, both already introduced in §9: Huang et al. [35] train their meta-learner on cross-validated rather than in-fold base-model predictions specifically to avoid leakage, and is cited throughout this review (§9, §10) as the type’s positive case; Yu et al. [36] stack five heterogeneous learners for tunnel pavement performance within a digital-twin framework and report strong deployment integration, but without the explicit leakage-avoidance statement that distinguishes Huang et al.’s design.

H6, decomposition then learn, is the one taxonomy type with, at the time of writing, no confirmed pavement-specific exemplar in the seed corpus, and the absence has now survived two independent, differently worded search sweeps rather than reflecting a single missed query — every wavelet- or VMD-based candidate located so far belongs to an adjacent domain (bridge deflection monitoring, energy-price forecasting) rather than to pavement engineering directly. Its absence is reported here as a tentative finding in its own right, to be confirmed or overturned once the completed harvest is available, rather than silently omitted or, on the other hand, overstated on the basis of two searches.

H3 (physics-informed) and **H7 (symbolic–numeric)** are each introduced in §6 and §5 respectively [20, 16, 14] and are not repeated here in full; both recur in §10’s discussion of what a validated, mechanically consistent model should be able to claim about its own interpretability that a purely post-hoc explanation of an unvalidated model cannot.

9. The hybridisation premium

9.1. Definition

For a study reporting a hybrid model M_{hyb} (optimiser $\oplus$ base learner M_{base}) evaluated on a held-out partition, the **hybridisation premium** is

$$\Delta = \text{performance}(M_{\text{hyb}}) - \text{performance}(M_{\text{base}}^{\text{tuned}})$$

where $M_{\text{base}}^{\text{tuned}}$ is the same base learner, tuned by a conventional procedure under a **comparable evaluation budget**, evaluated on the **same** partition with the **same** metric. All three constraints are load-bearing: a premium computed against an untuned, default-setting baseline is not a measure of what hybridisation contributes — it is a measure of what tuning contributes, mislabelled.

9.2. What the completed audit will report

Over the full coded corpus, the review will report, for every study attempting an H1 or H2 coupling: whether Δ is computable at all under the definition above (**premium_computable**); its value where it is;

whether the search budget was stated for both the hybrid and the baseline arm (`budget_parity_reported`); and, where a newly named optimiser is the paper’s contribution, whether it was benchmarked against at least two established optimisers on the same problem (`optimiser_novelty_claim`). These fields are specified in full, with worked examples, in the PAVE-ML instrument (§10) and were fixed before full-text coding began.

9.3. Preliminary evidence from the seed corpus

The completed audit is not yet available; what follows is the evidence already visible in the seed corpus, presented as motivation for the audit rather than as its result. Table 3 collects every within-paper comparison in the seed corpus close enough to a premium calculation to be informative, with every figure copied verbatim from the source paper’s own reported results.

Table 3: Within-corpus evidence bearing on the hybridisation premium. Every figure is copied verbatim from the cited paper’s own reported results; none is computed by the present review.

Source	Comparison	Metric	Non-hybrid		Premium	Note
			value	Hybrid value		
10.1038/s41598-022-17429-z	LSSVM / RMSE (best single-kernel setting reported) vs. best of 6 swarm-optimised LSSVM variants	(MPa)	not reported as a standalone tuned baseline	0.942 / 6.72 (best of six, SOS)	not computable — no tuned non-hybrid baseline reported	The paper compares six hybrids to each other, never to a conventionally tuned LSSVM. This is the missing-baseline pattern Section 9 quantifies.

Table 3: Within-corpus evidence bearing on the hybridisation premium. Every figure is copied verbatim from the cited paper’s own reported results; none is computed by the present review.

Source	Comparison	Metric	Non-hybrid		Premium	Note
			value	Hybrid value		
10.28991/cej-2025-011-01-062	10.28991/cej-2025-011-01-062 (dynamic modulus)	Witczak 1-40D / Hirsch (mechanistic)	bagging ensemble, individually tuned (highest of eight)	positive but modest — mechanistic models remain competitive; deep architectures do NOT win	The field’s clearest example of tuning parity: every learner gets its own search budget, and the winner is a tuned ensemble tree, not a hybrid or a deep net.	
10.1016/j.sandf.2020.102010	GA-2020-02-010 (resilient symbolic equation (H7-adjacent) vs. ANN-GA (GA on ANN weights, H2)	GA-only symbolic model	ANN-GA hybrid	ANN-GA reported higher R2, but adds a black-box layer over an already-competitive symbolic model	Rare true head-to-head between two hybrid types on identical data — flagged for full-text extraction of exact R2 values.	

Table 3: Within-corpus evidence bearing on the hybridisation premium. Every figure is copied verbatim from the cited paper’s own reported results; none is computed by the present review.

Source	Comparison	Metric	Non-hybrid		Premium	Note
			value	Hybrid value		
10.3390/app916324	PSO-ANN vs. PSO-ELM vs. kernel-ELM, all reported within one paper	RMSE / R2	PSO-ANN (same optimiser, different base learner)	PSO-ELM (best reported)	small, same-optimiser architecture comparison — isolates base-learner choice, not optimiser value	Useful for a different question than the premium: it holds the optimiser constant and varies the learner, the mirror image of what Section 9 needs.
10.3390/ma18122913	2018 ML models (KNN, Bayesian ridge, decision tree) vs. stacking ensemble	R2 (G* and phase angle)	best single model	stacking (R2 = 0.973 / 0.999)	positive, and the ONLY row in this table where leakage is explicitly controlled by design	Cross-validated meta-features stated as a deliberate leakage-avoidance choice — the paper we cite as the positive PAVE-ML exemplar.

Two readings of this table matter more than any single row. First, **the comparison the premium**

requires is usually absent, not unfavourable. Of the five rows, only two [2, 35] involve a paper that reports enough to attempt a premium calculation at all, and [2]’s own six-optimiser comparison never includes the one comparator — a conventionally tuned, non-hybrid version of the same LSSVM — that would let a reader compute Δ . This is the pattern the full audit is built to quantify: the missing baseline, not a negative result, is the dominant finding so far. Second, **where tuning parity is closest to being honoured, the hybrid or deep-architecture advantage narrows.** [1] tunes eight architectures individually, including deep networks, against both each other and two established mechanistic models; the winner is a tuned bagging ensemble. Neither a hybrid nor a deep architecture prevailed once every competitor received its own search budget. [35] is, so far, the seed corpus’s clearest positive counter-example — a heterogeneous stacking ensemble (H5) that both reports a credible premium over single models and states explicitly that its meta-learner was trained on cross-validated, not in-fold, base-model predictions specifically to avoid the leakage pathway characteristic of that hybridisation type (§4, H5). It is cited in §10 as the positive PAVE-ML exemplar for exactly this reason.

Neither reading should be generalised past what five studies can support. They are reported here as the reason the systematic audit in this section is worth completing, not as its substitute.

10. Interpretability and uncertainty in hybrid pipelines

PLACEHOLDER.

11. From premium to decision

A premium, once measured, still needs to be worth having. Two studies, from either end of the pavement management hierarchy, supply a yardstick for judging that. Hosseini and Smadi [37] work at the network level: injecting 10–90% error into a pavement performance prediction and propagating it through a 20-year network-level maintenance and rehabilitation schedule, they price the resulting treatment-cost consequence directly. Georgouli, Plati and Loizos [38], newer and at the project level, price the same kind of consequence for a single input rather than a whole prediction: they show that the choice between the NCHRP 1-37A dynamic-modulus model and a locally calibrated alternative propagates through a mechanistic-empirical rutting simulation (3D-Move) into a materially different rutting estimate, with the uncalibrated model systematically overestimating deformation. Read together, the two studies supply a yardstick for a hybridisation premium at both ends of the pavement management hierarchy — not whether $\Delta > 0$, but whether Δ is large enough, at the accuracy level the underlying prediction task already operates at, to change which treatment gets scheduled, when, or how a single input propagates through a downstream design calculation. A premium of a few hundredths of a unit of R^2 , of the kind several rows in Table 3 report or gesture toward, is a strong

candidate for being decision-irrelevant by this standard; the completed audit will report, for every study where both a premium and enough contextual detail are available, whether the premium plausibly clears this bar or not. This section will be completed once that judgement can be made study by study rather than asserted in general.

12. PAVE-ML: a reporting and appraisal checklist

The audit this review conducts is only as trustworthy as the coding rules behind it, and those rules are only useful to the field if they survive as something other than this paper’s internal methodology. PAVE-ML is offered as both: the instrument this review scores every included study against, and a checklist future studies can score themselves against before submission.

The full instrument — twenty items across five domains (data provenance, preprocessing and partitioning, modelling and comparison, evaluation and interpretation, and generalisation and transparency), plus four items specific to hybrid pipelines — is reproduced in full in the supplementary material (`docs/03_PAVE-ML_instrument.md`), together with the operational decision rules and worked examples that make the coding reproducible rather than a matter of reader judgement. Two design choices are worth stating here because they determine how the audit’s headline numbers should be read. First, **silence is coded as absence, not as unclear** — if a study does not state that its test partition was held out independently of hyperparameter selection, that is coded **no**, following the convention used in clinical prediction-model appraisal (TRIPOD, PROBAST), because it is the only convention that cannot be accused of charitable reading. Second, the four hybrid-specific items require a study to report its base learner’s performance both with and without the hybridising component on the same partition and metric (item 12a); to state the search budget for both arms so that parity can be assessed (12b); to run stochastic optimisers more than once and report the spread rather than the best run (12c); and, where a newly named optimiser is the contribution, to benchmark it against at least two established optimisers on the same problem (12d). [35] is, at the time of writing, the clearest example in the seed corpus of a study satisfying the spirit of items in this list without having been written against it — its stacking meta-learner is trained on cross-validated, not in-fold, predictions specifically to avoid leakage, which is exactly the practice item 7 of the general instrument (grouped/blocked partitioning respected by all fitted preprocessing) is written to detect the absence of.

The reliability of the instrument itself will be reported, not assumed: a random 15% of the fully coded corpus will be independently double-coded, Cohen’s κ reported per field, and any field falling below $\kappa = 0.60$ will have its decision rule rewritten and be recoded in full rather than reported with a caveat. This procedure, and its result, are reported in full in the completed manuscript.

13. Research agenda

The seed corpus and the taxonomy built from it are sufficient to state a research agenda now, even though the systematic audit that will refine it is not yet complete. Ten directions follow, each stated as a testable question paired with the data and method that would settle it, rather than as a general aspiration.

1. **The missing baseline.** For every H1/H2 study reporting a hybrid model, does the paper also report the same base learner tuned conventionally, on the same partition and metric, under a comparable search budget? §9’s preliminary evidence suggests the answer is usually no; the completed audit will report how often, across the full corpus, not just the five within-paper cases examined so far.
2. **Search-budget parity.** Among H1/H2 studies, what fraction report the number of function evaluations, iterations, or wall-clock time spent tuning the hybrid arm versus the baseline arm? PAVE-ML item 12b is designed to make this answerable at scale.
3. **Optimiser proliferation versus optimiser value.** Dozens of named metaheuristics recur across this literature (§4). Does a newly proposed optimiser outperform two or more established optimisers on the same pavement problem, or only outperform an unspecified or untuned baseline? PAVE-ML item 12d targets this directly.
4. **Section-grouped partitioning for the CRCP substrate series.** At least eight papers by one overlapping author team share a single ~33-section CRCP LTPP substrate (§7). A systematic re-derivation, from the LTPP database directly, of whether each paper’s published cross-validation folds respect section-level grouping would settle a question none of the eight papers’ available abstracts answers, and would be the single highest-value full-text verification task for the completed audit given how much of the corpus’s rutting/cracking/IRI evidence currently traces to this one substrate.
5. **The H6 gap.** No pavement-specific decomposition-then-learn (H6) study was located in the seed corpus (§8). Is this a genuine absence in the pavement literature, or an artefact of the search terms used so far? The completed harvest, with its wider algorithm-name coverage, will distinguish the two.
6. **Physics-informed learning beyond one exemplar.** [20] is presently the seed corpus’s only clear H3 case. Does the completed harvest find others, and if genuinely few exist, why has physics-constrained learning been adopted so much more slowly in pavement engineering than in adjacent fields such as structural health monitoring?
7. **Interpretability on validated models only.** §10 and §11 argue that a SHAP or Garson decomposition computed on a model with no external validation ranks the structure of the training data rather than the physics of the pavement. What share of the corpus’s interpretability-method studies pair the explanation with a validated model, by the external-validation criterion in §2.3?
8. **The efficiency dimension of hybridisation.** Most studies in this corpus report only accuracy gains. [33] is the seed corpus’s only example reporting a feature-set reduction alongside an accuracy claim. A

systematic accounting of computational-cost reporting (PAVE-ML item 19) would establish whether hybridisation’s practical case rests on accuracy, efficiency, or an unexamined mixture of both.

9. **Deployment evidence as an outcome variable.** §9’s deployment-evidence ladder (none through field trial) is, on current evidence, heavily weighted toward its lower rungs. Does deployment evidence correlate with any of the rigour-audit fields — external validation, baseline strength — or are the two independent, which would itself be a notable finding about how this field’s incentives currently operate?
10. **Replication of the premium construct outside pavement engineering.** The tuned-baseline problem this review documents is unlikely to be unique to pavement engineering. A parallel audit in an adjacent data-driven civil engineering literature — concrete mix design, geotechnical site characterisation — would establish whether the pattern is domain-specific or a broader feature of how metaheuristic-learner hybrids are currently reported across civil engineering.

14. Conclusions

Four conclusions follow from the evidence assembled so far.

First, a literature search restricted to the vocabulary of “hybrid” models undercounts this field’s actual hybridisation activity, because a meaningful share of qualifying studies describe themselves through optimiser names, not through the word hybrid itself. The algorithm-driven search protocol in §2 is offered as a partial remedy, and the completed manuscript will report, from the finished harvest, what fraction of the eligible literature a label-only search would have missed.

Second, the taxonomy in §4 shows that “hybrid” currently functions as a single label over at least seven structurally and theoretically distinct couplings, each with its own characteristic failure mode. Collapsing them, as the field’s current vocabulary does, obscures exactly the distinctions — between a metaheuristic searching hyperparameters and one searching weights, between architecture fusion and heterogeneous stacking — that determine whether a given failure mode is even in principle detectable from what a paper reports.

Third, and most consequentially, the comparison required to state a hybridisation premium — the same base learner, tuned conventionally, on the same data, under a comparable budget — is rarely made available by the studies that would need to report it. Of the studies examined closely enough in the seed corpus to test this directly, the missing baseline, not an unfavourable premium, is the dominant pattern (§9). Where the comparison approaches fairness, as in [1], the hybrid or deep-architecture advantage narrows or disappears against a properly tuned conventional alternative.

Fourth, the field has the practical means to fix this at essentially no added cost. None of the four hybrid-specific PAVE-ML items (§10) requires new data collection or a new experiment — reporting the base learner’s own tuned performance, the search budget for each arm, the spread across repeated stochastic runs,

and a comparison against established optimisers are all computable from runs a study has, in most cases, already performed. The gap this review documents is therefore substantially a reporting gap rather than a capability gap, which is the most optimistic reading available of an otherwise uncomfortable set of findings — and the reading the completed audit is designed to test.

Declaration of competing interest

The authors declare no competing financial interests or personal relationships that could have influenced the work reported in this paper.

Declaration of generative AI in the writing process

PLACEHOLDER — to be completed per the target journal’s wording before submission. Elsevier requires a statement naming the tool, the purpose of use, and confirmation that the authors reviewed and take full responsibility for the content. Disclosed use is permitted; undisclosed use is not.

Data availability

The screening database, coding rubric, harvesting scripts and the full analysis pipeline that produced every figure and table in this paper are available at [REPOSITORY URL].

References

- [1] W. Zeiada, L. Obaid, S. M. El-Badawy, et al., Benchmarking classical and deep machine learning models for predicting hot mix asphalt dynamic modulus, *Civil Engineering Journal* (2025). [doi:10.28991/cej-2025-011-01-06](https://doi.org/10.28991/cej-2025-011-01-06).
- [2] A. Azam, A. Bardhan, M. R. Kaloop, et al., Modeling resilient modulus of subgrade soils using lssvm optimized with swarm intelligence algorithms, *Scientific Reports* (2022). [doi:10.1038/s41598-022-17429-z](https://doi.org/10.1038/s41598-022-17429-z).
- [3] X. Yang, J. Guan, L. Ding, et al., Research and applications of artificial neural network in pavement engineering: A state-of-the-art review, *J. Traffic Transp. Eng. (Engl. Ed.)* (2021). [doi:10.1016/j.jtte.2021.03.005](https://doi.org/10.1016/j.jtte.2021.03.005).
- [4] K. Gopalakrishnan, Deep learning in data-driven pavement image analysis and automated distress detection: A review, *Data* (2018). [doi:10.3390/data3030028](https://doi.org/10.3390/data3030028).
- [5] W. Cao, Q. Liu, Z. He, Review of pavement defect detection methods, *IEEE Access* (2020). [doi:10.1109/access.2020.2966881](https://doi.org/10.1109/access.2020.2966881).

- [6] Y. Hou, Q. Li, C. Zhang, et al., The state-of-the-art review on applications of intrusive sensing, image processing techniques, and machine learning methods in pavement monitoring and analysis, *Engineering* (2020). [doi:10.1016/j.eng.2020.07.030](https://doi.org/10.1016/j.eng.2020.07.030).
- [7] F. e. M'harzi Alaoui, Y. Taki, I. Aalil, et al., From lab to algorithm: a review of ai-driven predictive modeling in soil stabilization for road construction, *J. Umm Al-Qura Univ. Eng. Archit.* (2026). [doi:10.1007/s43995-026-00294-6](https://doi.org/10.1007/s43995-026-00294-6).
- [8] Y. S. Jweihan, Trustworthy explainable ai for asphalt pavement engineering: a systematic scoping review of materials, performance, and decision support, *Applied System Innovation* (2026). [doi:10.3390/asi9070133](https://doi.org/10.3390/asi9070133).
- [9] A. A. Alhussan, D. S. Khafaga, E.-S. M. El-kenawy, Pothole and plain road classification using adaptive mutation dipper throated optimization and transfer learning for self driving cars, *IEEE Access* (2022). [doi:10.1109/access.2022.3196660](https://doi.org/10.1109/access.2022.3196660).
- [10] M. Latifi, F. Golivand Darvishvand, O. Khandel, et al., A deep reinforcement learning model for predictive maintenance planning of road assets: Integrating lca and lcca, *arXiv preprint* (2021). [doi:10.48550/arxiv.2112.12589](https://doi.org/10.48550/arxiv.2112.12589).
- [11] M. Guo, M. Zhou, X. Du, et al., Machine learning-based analysis of interaction effects among influencing factors on the resilient modulus of stabilized aggregate base, *Comput.-Aided Civ. Infrastruct. Eng.* (2025). [doi:10.1111/mice.70102](https://doi.org/10.1111/mice.70102).
- [12] S. Hanandeh, Introducing mathematical modeling to estimate pavement quality index of flexible pavements based on genetic algorithm and artificial neural networks, *Case Stud. Constr. Mater.* (2022). [doi:10.1016/j.cscm.2022.e00991](https://doi.org/10.1016/j.cscm.2022.e00991).
- [13] L. Yao, Z. Leng, J. Jiang, et al., Large-scale maintenance and rehabilitation optimization for multi-lane highway asphalt pavement: A reinforcement learning approach, *IEEE Trans. Intell. Transp. Syst.* (2022). [doi:10.1109/tits.2022.3161689](https://doi.org/10.1109/tits.2022.3161689).
- [14] B. Ghorbani, A. Arulrajah, G. A. Narsilio, et al., Development of genetic-based models for predicting the resilient modulus of cohesive pavement subgrade soils, *Soils and Foundations* (2020). [doi:10.1016/j.sandf.2020.02.010](https://doi.org/10.1016/j.sandf.2020.02.010).
- [15] M. R. Kaloop, D. Kumar, P. Samui, et al., Particle swarm optimization algorithm-extreme learning machine (pso-elm) model for predicting resilient modulus of stabilized aggregate bases, *Applied Sciences* (2019). [doi:10.3390/app9163221](https://doi.org/10.3390/app9163221).

- [16] A. R. Ghanizadeh, A. Tavana Amlashi, A. Bahrami, et al., A formulation for asphalt concrete air void during service life by adopting a hybrid evolutionary polynomial regression and multi-gene genetic programming, *Scientific Reports* (2024). [doi:10.1038/s41598-024-61313-x](https://doi.org/10.1038/s41598-024-61313-x).
- [17] O. Elbagalati, M. A. Elseifi, K. Gaspard, et al., Development of an artificial neural network model to predict subgrade resilient modulus from continuous deflection testing, *Can. J. Civ. Eng.* (2017). [doi:10.1139/cjce-2017-0132](https://doi.org/10.1139/cjce-2017-0132).
- [18] A. R. Ghanizadeh, N. Heidarabadizadeh, F. Jalali, Artificial neural network back-calculation of flexible pavements with sensitivity analysis using garson's and connection weights algorithms, *Innov. Infrastruct. Solut.* (2020). [doi:10.1007/s41062-020-00312-z](https://doi.org/10.1007/s41062-020-00312-z).
- [19] A. R. Ghanizadeh, N. Heidarabadizadeh, F. Jalali, A. Tavana Amlashi, A. T. Papagiannakis, Metabackcal: Implementing metaheuristic-driven back-calculation for flexible pavement moduli estimation, *Construction and Building Materials* (2025). [doi:10.1016/j.conbuildmat.2025.143050](https://doi.org/10.1016/j.conbuildmat.2025.143050).
- [20] S. K. Pasupunuri, N. Thom, L. Li, Roughness prediction of jointed plain concrete pavement using physics informed neural networks, *Transportation Research Record* (2024). [doi:10.1177/03611981241245991](https://doi.org/10.1177/03611981241245991).
- [21] A. Alnaqbi, W. Zeiada, G. G. Al-Khateeb, A hybrid machine learning method of support vector regression with particle swarm optimization for predicting iri in continuously reinforced concrete pavement, *J. Eng. Appl. Sci.* (2025). [doi:10.1186/s44147-025-00706-9](https://doi.org/10.1186/s44147-025-00706-9).
- [22] A. Alnaqbi, W. Zeiada, G. Al-Khateeb, A pso-tuned gradient boosting model for accurate iri prediction in continuously reinforced concrete pavements, *Innovative Infrastructure Solutions* (2025). [doi:10.1007/s41062-025-02249-7](https://doi.org/10.1007/s41062-025-02249-7).
- [23] A. Alnaqbi, G. G. Al-Khateeb, W. Zeiada, High-accuracy prediction of roughness in crcp using a hybrid genetic algorithm–svr approach, *J. Umm Al-Qura Univ. Eng. Archit.* (2025). [doi:10.1007/s43995-025-00214-0](https://doi.org/10.1007/s43995-025-00214-0).
- [24] A. Alnaqbi, G. Al-Khateeb, W. Zeiada, Predictive modeling of longitudinal cracking in crcp using pso-tuned gradient boosting machines, *J. Eng. Appl. Sci.* (2025). [doi:10.1186/s44147-025-00623-x](https://doi.org/10.1186/s44147-025-00623-x).
- [25] A. Alnaqbi, G. G. Al-Khateeb, W. Zeiada, Optimized prediction of longitudinal cracking in concrete pavements using hybrid ga-gbm models, *J. Building Pathol. Rehabil.* (2025). [doi:10.1007/s41024-025-00667-9](https://doi.org/10.1007/s41024-025-00667-9).
- [26] A. Alnaqbi, G. Al-Khateeb, W. Zeiada, A hybrid approach of support vector regression with genetic algorithm optimization for predicting spalling in continuously reinforced concrete pavement, *J. Building Pathol. Rehabil.* (2024). [doi:10.1007/s41024-024-00499-z](https://doi.org/10.1007/s41024-024-00499-z).

- [27] A. J. Alnaqbi, W. Zeiada, G. G. Al-Khateeb, Predicting friction number in crcp using ga-optimized gradient boosting machines, *Construction Materials* (2026). [doi:10.3390/constrmater6010006](https://doi.org/10.3390/constrmater6010006).
- [28] A. Alnaqbi, G. G. Al-Khateeb, W. Zeiada, Optimizing punchout prediction in rigid pavement using a hybrid ga-svr approach, *Discover Civil Engineering* (2025). [doi:10.1007/s44290-025-00381-y](https://doi.org/10.1007/s44290-025-00381-y).
- [29] W. Xiao, C. Wang, J. Liu, M. Gao, J. Wu, Optimizing faulting prediction for rigid pavements using a hybrid shap-tpe-catboost model, *Applied Sciences* (2023). [doi:10.3390/app132312862](https://doi.org/10.3390/app132312862).
- [30] Y. Deng, X. Shi, Modeling the rutting performance of asphalt pavements: a review, *J. Infrastruct. Preserv. Resil.* (2023). [doi:10.1186/s43065-023-00082-9](https://doi.org/10.1186/s43065-023-00082-9).
- [31] Z. Sun, J. Zhai, L. Pei, et al., Automatic pavement crack detection transformer based on convolutional and sequential feature fusion, *Sensors* (2023). [doi:10.3390/s23073772](https://doi.org/10.3390/s23073772).
- [32] S. Alshawabkeh, L. Wu, D. Dong, et al., Automated pavement crack detection using deep feature selection and whale optimization algorithm, *Computers, Materials & Continua* (2023). [doi:10.32604/cm.2023.042183](https://doi.org/10.32604/cm.2023.042183).
- [33] E. Elhariri, N. El-Bendary, S. A. Taie, Using hybrid filter-wrapper feature selection with multi-objective improved-salp optimization for crack severity recognition, *IEEE Access* (2020). [doi:10.1109/access.2020.2991968](https://doi.org/10.1109/access.2020.2991968).
- [34] N. Pan, Y. Du, A. K. Parlikad, A spatiotemporal prediction method for the evolution of pavement distress in road networks, *Comput.-Aided Civ. Infrastruct. Eng.* (2025). [doi:10.1111/mice.70169](https://doi.org/10.1111/mice.70169).
- [35] H. Huang, Z. Xu, X. Li, et al., Predicting rheological properties of asphalt modified with mineral powder: bagging, boosting, and stacking vs. single machine learning models, *Materials* (2025). [doi:10.3390/ma18122913](https://doi.org/10.3390/ma18122913).
- [36] G. Yu, S. Zhang, M. Hu, et al., Prediction of highway tunnel pavement performance based on digital twin and multiple time series stacking, *Adv. Civ. Eng.* (2020). [doi:10.1155/2020/8824135](https://doi.org/10.1155/2020/8824135).
- [37] S. A. Hosseini, O. Smadi, How prediction accuracy can affect the decision-making process in pavement management system, *Infrastructures* (2021). [doi:10.3390/infrastructures6020028](https://doi.org/10.3390/infrastructures6020028).
- [38] K. Georgouli, C. Plati, A. Loizos, Impact of dynamic modulus prediction errors on rutting estimates in sustainable flexible pavements, *Infrastructures* (2026). [doi:10.3390/infrastructures11040127](https://doi.org/10.3390/infrastructures11040127).