

⚠ A GitHub account is required to use Quartz and Quartz Syncer >

You can sign up for free [here](#)

Set up Quartz

Create Quartz GitHub repository

[click here](#)

Configure Quartz settings

Configure `quartz.config.ts`

`quartz.config.ts`

```
const config: QuartzConfig = {
  configuration: {
    pageTitle: "Quartz 4",
    // Change to your desired site title
    ...
    baseUrl: "quartz.jzhao.xyz",
    // Change to your site URL without https://.
    // This is your own domain,
    // or "<github-user-name>.github.io/<repository-name>" when using GitHub
    Pages.
    // See below for details
    ...
    defaultDateType: "modified",
    // Change to tell Quartz what date to display on notes
    // Valid options:
    // "created", use when the note was created.
    // "modified", use when the note was last modified.
    // "published", use when the note was published.
```

```

    // See Quartz docs for details.
    ...
  }
}
plugins: {
  transformers: [
    ...
    Plugin.CrawlLinks({ markdownLinkResolution: "shortest" }),
    // Sets how Quartz should resolve links between notes.
    // Should match the settings you use in Obsidian.
    // Valid options:
    // "shortest"
    // "relative"
    // "absolute"
    ...
  ]
  ...
}
}

```

Configure automatic deployment

GitHub Pages setup (recommended)

In your GitHub repository, go to **Settings > Pages** and set **Source** to "GitHub Actions".

Next, add one of the following deploy scripts:

Option 1: Default Quartz >

For using Quartz without adding an Obsidian Theme.

Add the following script as **.github/workflows/deploy.yaml**

```

name: Deploy Quartz site to GitHub Pages

on:
  push:
    branches:
      - v4

permissions:

```

```

  contents: read
  pages: write
  id-token: write

concurrency:
  group: "pages"
  cancel-in-progress: false

jobs:
  build:
    runs-on: ubuntu-22.04
    steps:
      - uses: actions/checkout@v4
        with:
          fetch-depth: 0 # Fetch all history for git info
      - uses: actions/setup-node@v4
        with:
          node-version: 22
      - name: Install Dependencies
        run: npm ci
      - name: Build Quartz
        run: npx quartz build
      - name: Upload artifact
        uses: actions/upload-pages-artifact@v3
        with:
          path: public

  deploy:
    needs: build
    environment:
      name: github-pages
      url: ${ steps.deployment.outputs.page_url }
    runs-on: ubuntu-latest
    steps:
      - name: Deploy to GitHub Pages
        id: deployment
        uses: actions/deploy-pages@v4

```

☰ Option 2: Quartz with Quartz Themes >

For using an Obsidian Theme with Quartz,

🔗 Don't forget to replace **THEME-NAME** with your Obsidian theme of choice

A list of theme options can be [found here](#).

Add the following script as `.github/workflows/deploy.yaml`

```
name: Deploy Quartz site to GitHub Pages

on:
  push:
    branches:
      - v4

permissions:
  contents: read
  pages: write
  id-token: write

concurrency:
  group: "pages"
  cancel-in-progress: false

jobs:
  build:
    runs-on: ubuntu-22.04
    steps:
      - uses: actions/checkout@v4
        with:
          fetch-depth: 0 # Fetch all history for git info
      - uses: actions/setup-node@v4
        with:
          node-version: 22
      - name: Install Dependencies
        run: npm ci
      - name: Fetch Quartz Theme
        run: curl -s -S https://raw.githubusercontent.com/saberzero1/quartz-themes/master/action.sh | bash -s -- THEME-NAME
      - name: Build Quartz
        run: npx quartz build
      - name: Upload artifact
        uses: actions/upload-pages-artifact@v3
        with:
          path: public

  deploy:
```

```
needs: build
environment:
  name: github-pages
  url: ${ steps.deployment.outputs.page_url }
runs-on: ubuntu-latest
steps:
  - name: Deploy to GitHub Pages
    id: deployment
    uses: actions/deploy-pages@v4
```

[Quartz docs on hosting](#)

Generating a fine-grained access token

1. Go to [this page](#) and apply the following settings:

1. **Token name:** The name to identify this token. I'd recommend something that indicates it is for Quartz Syncer, like `Quartz Syncer token`.

New fine-grained personal access token

Create a fine-grained, repository-scoped token suitable for personal API use and for using Git over HTTPS.

Token name *

Quartz Syncer Docs

✔ 'Quartz Syncer Docs' is available.

A unique name for this token. May be visible to resource owners or users with possession of the token.

2. **Expiration:** When this token will expire. Defaults to 30 days from now. GitHub will send you and email when your token is about to expire.

Expiration

📅 90 days (Aug 03, 2025) ▾

The token will expire on the selected date

3. **Repository access:** Select **Only select repositories** and in the drop-down select your Quartz repository.

Repository access

☐ **Public repositories**

Read-only access to public repositories.

☐ **All repositories**

This applies to all current and future repositories you own. Also includes public repositories (read-only).

☒ **Only select repositories**

Select at least one repository. Max 50 repositories. Also includes public repositories (read-only).

 Select repositories 1 ▾

Selected 1 repository.

 saberzero1/quartz-syncer-docs



4. **Permissions:** Click **Repository permissions** to open all options.

Permissions

Choose the minimal permissions necessary for your needs. [Learn more about permissions.](#)

Repository permissions 1 selected 1 mandatory

Repository permissions permit access to repositories and related resources.



Account permissions

User permissions permit access to resources under your personal GitHub account.



5. Scroll to the **Contents** option and change *Access: No access* to *Access: Read and write*. This will allow Quartz Syncer to manage your Quartz' content folder.

Codespaces secrets

Restrict Codespaces user secrets modifications to specific repositories. [Learn more.](#)

Access: No access ▾

Commit statuses

Commit statuses. [Learn more.](#)

Access: No access ▾

Contents Selected

Repository contents, commits, branches, downloads, releases, and merges. [Learn more.](#)

Access: Read and write ▾

Custom properties

View and set values for a repository's custom properties, when allowed by the property. [Learn more.](#)


Access: No access ▾

Dependabot alerts


Retrieve Dependabot alerts. [Learn more.](#)

Access: No access ▾


2. Now scroll down and click the button that says **Generate token**.

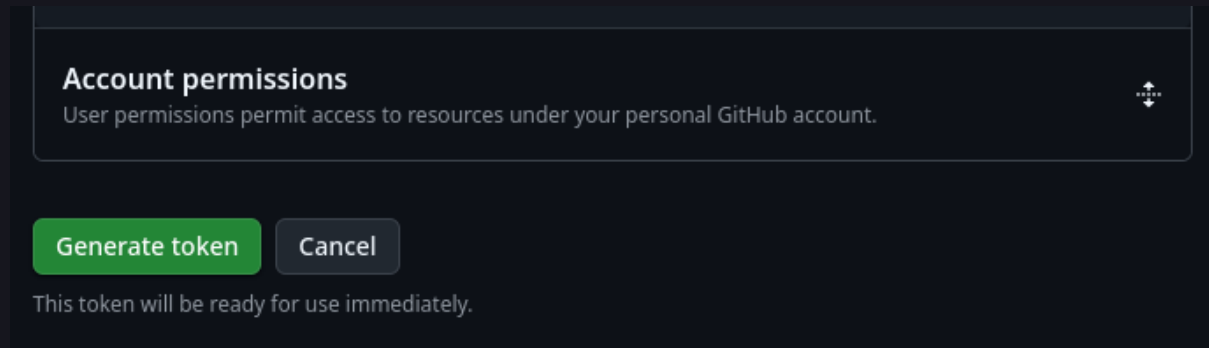

3. A popup will show with the current settings. Click **Generate token** to confirm.

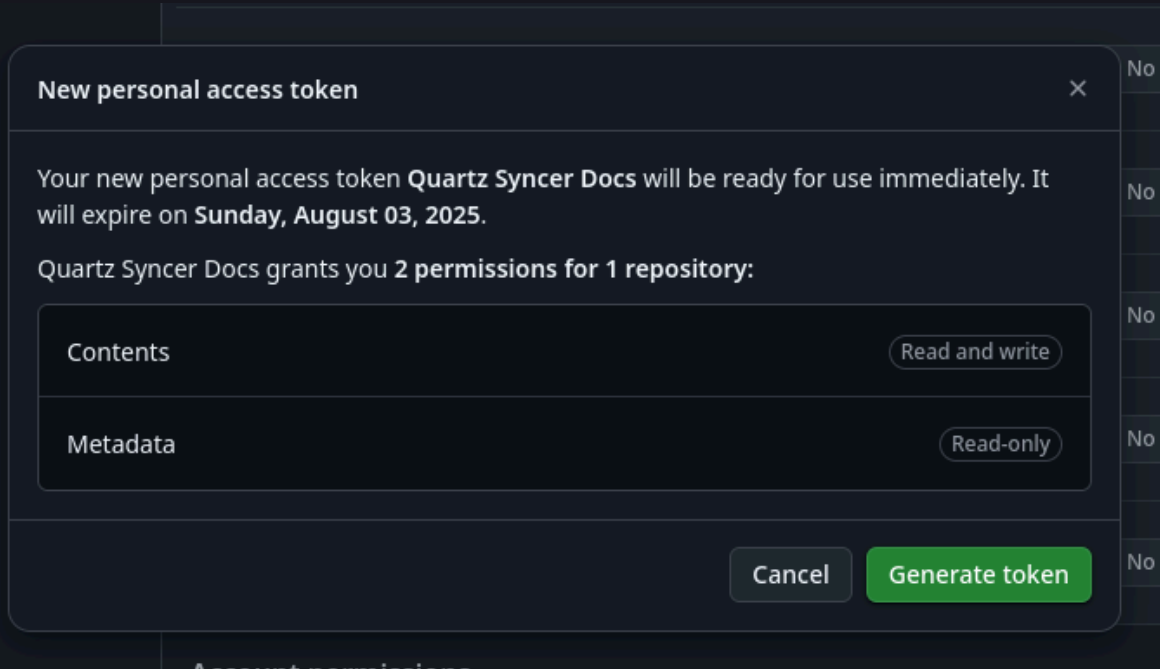

4. Click the copy button to copy the generated access token.

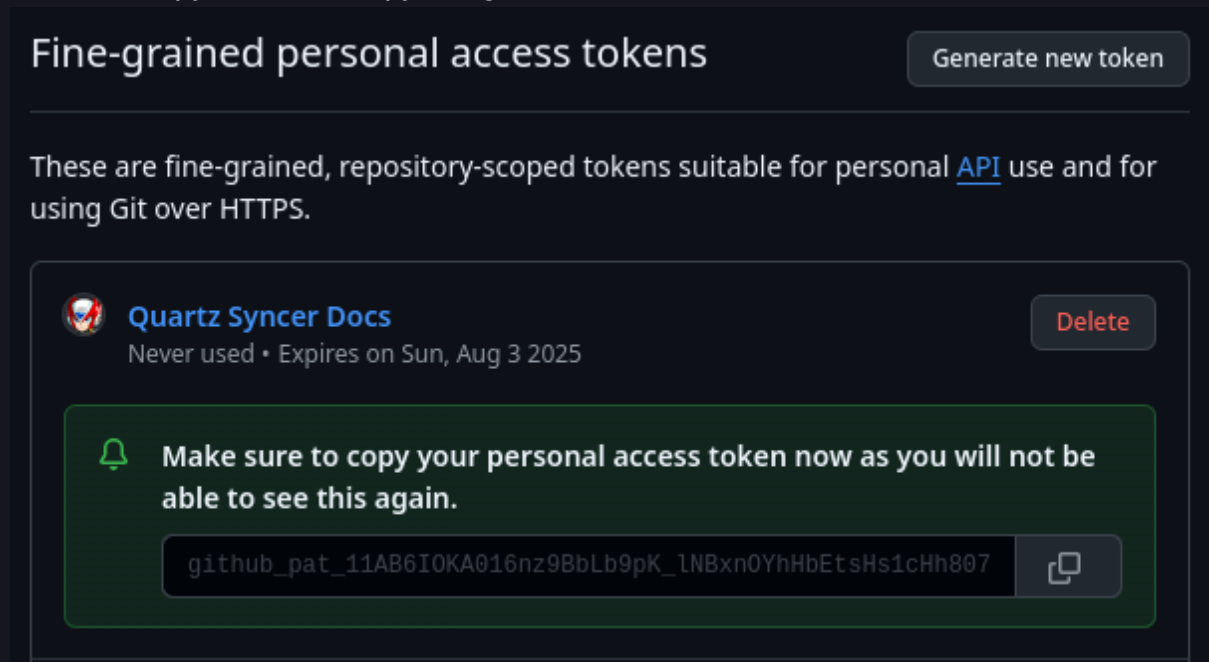

5. Open Obsidian.

6. Open Obsidian's settings and click on **Quartz Syncer** under *Community Plugins*.
7. Paste the generated token in the **GitHub token** field.

Options
General
Editor
Files and links
Appearance
Hotkeys
Core plugins
Community plugins

Core plugins
Backlinks
Canvas
Command palette
Daily notes
File recovery
Note composer
Page preview
Quick switcher
Sync
Templates

Community plugins
Dataview
Excalidraw
Linter
Quartz Syncer
Style Settings

Quartz Syncer Settings

Remember to read the setup guide if you haven't already. It can be found [here](#).

🔑 GitHub Authentication (required) ☒

GitHub repo name
The name of the GitHub repository
quartz-syncer-docs

GitHub Username
Your GitHub Username
saberzero1

GitHub token
A GitHub token with repo permissions. You can generate it [here](#)
github_pat_11AB6iOKA016nz9BbL

Quartz content folder name
The folder where your vault lives inside Quartz. By default "content"
content

Use full image resolution
By default, Quartz Syncer will use a lower resolution image to save space. If you want to use the full resolution image, enable this setting. ☐

Show created timestamp
Show the created timestamp on your notes ☐

Show updated timestamp
Show the updated timestamp on your notes ☐

Pass frontmatter
Pass the frontmatter from the notes to Quartz. This will allow you to use frontmatter in your Quartz notes. ☒

Use Permalink
Use the note's permalink as the Quartz note's URL. This will override the default Quartz URL. ☐

Set up Quartz Syncer

Settings > Community Plugins > Quartz Syncer > Options

-
-
- [generated authentication token](#)

☰ Configuration Example >

Using the original Quartz repository as an example:

The repository is hosted at <https://github.com/jackyzha0/quartz>

- **Repository name** quartz
- **Username** jackyzha0

- *GitHub token* generated token. usually starts with `ghp_`

[the relevant troubleshooting page](#)

That's it

[Usage Guide](#)