


Chosen project: Smart Objectives

Github repo: <https://github.com/sachhyam/web1/blob/main/web1.zip>

Requirements List:

Requirement #	Description	Contributor Name
1	There will be a sign-up and sign-in feature	Sachhyam Dahal
2	Users should be able to create a goal using a SMART framework. For each goal, a user can write the name of the goal, the description related to the SMART, and the due date.	Sachhyam Dahal
3	They should be able to see the list of goals that have already been created.	Konstantin Gospodinov
4	Once they have set a specific goal, they should be able to break it down into achievable targets. The targets can be numeric, boolean, monetary, or task-related.	Konstantin Gospodinov

Site Map:

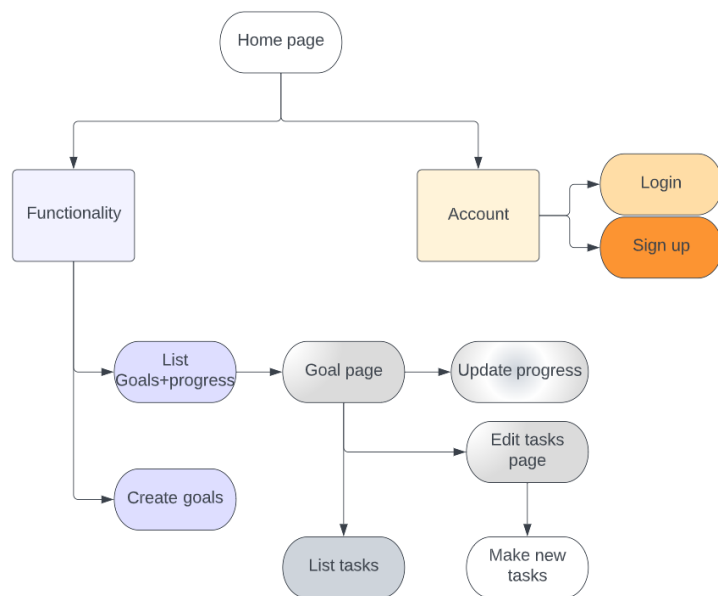

Wireframing:

1. Login Page

Log in

Username

Password

Enter

Create New Account

2. Goals Page

Create New Goal

Goals

Progress

edit

edit

edit

edit

3. Create new goal

Specific	Set a specific goal, make sure it is also realistic
Measurable	How will you measure your success?
Assignable	By when do you want to achieve this?
Realistic	
	Who will be achieving this goal?
Time bound	

4. Goal Page

Goal text	How will you measure it text	
Goal breakdown into tasks	<button>Remove tasks</button>	<button>Add new task</button>
<u>Task1</u>	Progress slider	<div>Edit mode for progress</div>
<u>Task2</u>	Progress number	<div></div>
<u>Task3</u>	Progress checkbox	<div></div>

5. Create new Task

The code, as a single PDF:

Goals.html:

```
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
  <!-- Stylesheet imported from outside, common for all pages -->
  <link rel="stylesheet" href="stylesheets/goaltask.css">
</head>
<body>
  <div class="container">
    <h3 align="center">Your current goals</h3>
    <hr>
    <div class="container">
      <div class="container" align="center">
        <button action="#">Create new goal</button>
      </div>
      <!-- Headers for the columns -->
      <div class="column">
        <div class="row">
          <!-- Per column content, so the button, the goal list
and the progress -->
          <div class="goalcolumn" align="center">
            <h3>Goals</h3>
          </div>
          <div class="progresscolumnhead">
            <h3>Progress</h3>
          </div>
          <div class="buttoncolumn">
            <h3>Actions</h3>
          </div>
          <br>
        </div>
      </div>

      <!-- Its done in this format for an iterative approach later in
app development -->
      <div class="column">
        <div class="row">
```

```

        <!-- Per column content, so the button, the goal list
and the progress -->
        <div class="goalcolumn">
            <p>Goal 1: <br>Make this work</p>
        </div>
        <div class="progresscolumn">
            <progress value="30" max="100"></progress>
        </div>
        <div class="buttoncolumn">
            <p>
                <button>Edit</button>
            </p>
        </div>
        <br>
    </div>
    <!-- Copy of above code with slight modifications -->
    <div class="column">
        <div class="row">
            <!-- Per column content, so the button, the goal list
and the progress -->
            <div class="goalcolumn">
                <p>Goal 2: Unknown</p>
            </div>
            <div class="progresscolumn">
                <progress value="0" max="100"></progress>
            </div>
            <div class="buttoncolumn">
                <p>
                    <button>Edit</button>
                </p>
            </div>
            <br>
        </div>
        <!-- The above 2 will probably be put into a for loop -->
    </div>
</div>
</body>
</html>

```

Login.html:

```
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
  <!-- Stylesheet imported from outside, common for all pages -->
  <link rel="stylesheet" href="stylesheets/style.css">
</head>
<body>
  <div class="centralized_container">
    <h3 align="center">Setting Smart Goals</h3>
    <!-- Login form starts here -->
    <form action="/" method="post">
      Email: <br>
      <input type="email" name="email" id="email">
      <br>
      Password: <br>
      <input type="password" name="password" id="password">
      <br>
      <br>
      <input type="submit" value="Login">
    </form>
    <hr>
    <!-- Signup link -->
    <div class="container" align="center">
      <p>Dont have an account?</p>
      <button type="submit">Sign up</button>
    </div>
  </div>
</body>
</html>
```


Newgoal.html

```
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet" href="stylesheets/style.css">
</head>
<body>
  <h2 align="center">Create a new smart goal</h2>
  <div class="container">
    <div class="row">
      <div class="column">
        <h3>Specifc</h3>
        <h3>Measureable</h3>
        <h3>Assignable</h3>
        <h3>Realistic</h3>
        <h3>Time bound</h3>
      </div>
      <div class="column" style="background-color:#bbb;">
        <form action="#" method="post">
          <label for="goal">Set a specifc goal</label>
          <input type="text" name="goal" id="goal">
          <br>
          <br>
          <label for="goal">How will you measure your
success?</label>
          <br>
          <select id="goal" name="goal">
            <option value="number">Numerically</option>
            <option value="slider">Progressively </option>
            <option value="check">By Completion</option>
          </select>
          <br>
          <br>
          <label for="date">By when do you want to acheive
this?</label>
          <input type="date" name="due" id="due">
          <br>
          <br>
        </form>
      </div>
    </div>
  </div>
</body>
</html>
```

```

        <input type="button" value="Submit">
    </form><br>
</div>
</div>
</div>
</body>
</html>

```

Newtask.html

```

<head>
    <link rel="stylesheet" href="stylesheets/tasks.css">
</head>

<div class="container" align="center">
    <h2>Create new task</h2>
    <hr>
</div>
<hr>
<!-- Signup link -->
<div class="container" align="cente
<div class="text_container" align=center>
    <form action="#" id="newtask" method="POST">
        <label for="w3review">Enter task description:</label><br>
        <textarea id="w3review" name="w3review" rows="3" cols="20">
        </textarea>
        <br><br>
        <label for="description">What kind of task is it?</label>
        <br>
        <select id="description" name="description">
            <option value="number">Numeric</option>
            <option value="slider">Progressive</option>
            <option value="checkbox">Boolean</option>
            <option value="list">Checklist</option>
        </select>
        <br>
        <br>
        <button type="submit">Submit</button>
    </form>
</div>

```

Signup.html:

```
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
  <!-- Stylesheet imported from outside, common for all pages -->
  <link rel="stylesheet" href="stylesheets/style.css">
</head>
<body>
  <div class="centralized_container">
    <h3 align="center">Signing up for Smart Goals</h3>
    <!-- Login form starts here -->
    <form action="/#" method="post">
      Username: <br>
      <input type="text" name="username" id="username">
      <br>
      Email: <br>
      <input type="email" name="email" id="email">
      <br>
      Password: <br>
      <input type="password" name="password" id="password">
      <br>
      Name: <br>
      <input type="text" name="name" id="name">
      <br>
      Address: <br>
      <input type="text" name="address" id="address">
      <br>
      Country: <br>
      <input type="text" name="country" id="country">
      <br>
      Zip Code: <br>
      <input type="text" name="zipcode" id="zipcode">
      <br>
      Sex<br>
      <select id="sex" name="sex">
```

```

        <option value="M">Male</option>
        <option value="F">Female</option>
        <option value="Other">Other</option>
        <option value="No">I'd prefer not to</option>
    </select>
    <br>

    About / Bio: <br>
    <textarea name="about" id="about" cols="20"
rows="8"></textarea>
    <br>

    <br>
    <input type="submit" value="Login">
</form>
</div>
</body>
</html>

```

Login.html:

```

<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
    <!-- Stylesheet imported from outside, common for all pages -->
    <link rel="stylesheet" href="stylesheets/goaltask.css">
</head>
<body>
    <div class="container">
        <h3 align="center">Your tasks</h3>
        <!-- This gets replaced with a navbar soon -->
        <div class="container">
            <div class="container" align="center">
                <h5>Current goal: Pass BSA</h5>
            </div>

            <div class="container" align="center">
                <button action="#">Remove tasks</button>
            </div>
        </div>
    </div>

```

```

        <button action="#">Create new task</button>
    </div>
    <br>
    <!-- Headers for the columns -->
    <div class="column">
        <div class="row">
            <!-- Per column content, so the button, the goal list
and the progress -->
            <div class="goalcolumn" >
                <h3>Tasks</h3>
            </div>
            <div class="progresscolumnhead">
                <h3>Progress</h3>
            </div>
            <div class="buttoncolumn">
                <h3>Actions</h3>
            </div>
        <br>
    </div>
    <hr>
    <!-- Its done in this format for an iterative approach later in
app development -->
    <div class="column">
        <div class="row">
            <!-- Per column content, so the button, the goal list
and the progress -->
            <div class="goalcolumn">
                <p>Goal 1: <br> Make this work</p>
            </div>
            <div class="progresscolumn">
                <input type="checkbox" id="custom1" name="custom1"
value="Boolean">
                <label for="custom1"> Completed</label><br>
            </div>
            <div class="buttoncolumn">
                <p>
                    <button>Edit</button>
                    <button>Remove</button>
                </p>
            </div>
        </div>
    </div>

```

```

        </div>
        <br>
    </div>
</div>
<hr>
<!-- Copy of above code with slight modifications -->
<div class="column">
    <div class="row">
        <!-- Per column content, so the button, the goal list
and the progress -->
        <div class="goalcolumn">
            <p>Goal 2: <br>Do the web task</p>
        </div>
        <div class="progresscolumn">
            <div class="slidecontainer">
                <input type="range" min="1" max="100"
value="50" class="slider" id="myRange">
            </div>
        </div>
        <div class="buttoncolumn">
            <p>
                <button>Edit</button>
                <button>Remove</button>
            </p>
        </div>
    <br>
</div>
<hr>
<!-- The above 2 will probably be put into a for loop -->
<div class="column">
    <div class="row">
        <!-- Per column content, so the button, the goal list
and the progress -->
        <div class="goalcolumn">
            <p>Task 3: <br> Save Money</p>
        </div>
        <div class="progresscolumn">
            <input id="number" type="number" value="42" />
euros saved

```

```
        </div>
        <div class="buttoncolumn">
            <p>
                <button>Edit</button>
                <button>Remove</button>
            </p>
        </div>
    <br>
</div>
</div>
<hr>
</div>
</div>
</body>
</html>
```

Style.css

```
.centralized_container {
  position: absolute;
  top: 50%;
  left: 50%;
  transform: translate(-50%, -50%);
}

.container {
  padding-left: 15px;
  padding-right: 10px;
  margin-right: auto;
  margin-left: auto;
}

.row {
  display: flex;
  padding: 10px;
  ;
}

.column {
  flex: 50%;
  padding: 10px;
  border: 1px dotted black;
}
```


Goaltask.css:

```
.goalcolumn {
  width: 20vw;
  text-align: lefts;
}

.progresscolumn {
  padding-top: 18;
  align-items: center;
  width: 50vw;
}

.progresscolumnhead {
  width: 50vw;
}

.buttonscolumn {
  width: 15vw;
  margin-left: auto;
  margin-right: auto;
}

.row {
  display: flex;
}

.column {
  flex: 50%;
}

#number {
  width: 3em;
}

.text_container {
  border: 1px solid;
```

```
border-radius: 16px;  
margin-top: 15px;  
margin-bottom: 15px;  
}
```