

num
10

if (num == 10)


① Create a node.

② Assign the value to the data field.
 $ptr \rightarrow data = value;$


③ Attach the node to the linked list.

a) If the linked list is empty.

if (head == NULL)
head = ptr;

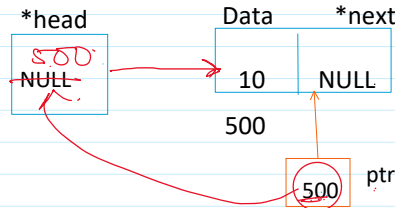

b) If linked list contains nodes

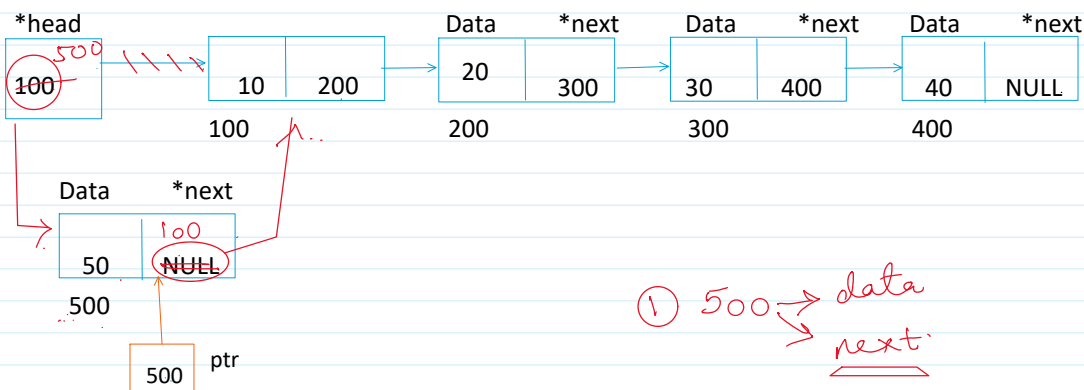

① $500 \rightarrow data$
 $500 \rightarrow next$

$500 \rightarrow next = 100;$
 $ptr \rightarrow next = head;$

- 1) Connect the new node to the first node of the list.
 - a. $Ptr \rightarrow next = head;$
- 2) Update the head pointer to point to the new node.
 - a. $Head = ptr;$

② $head = 500;$
 $head = ptr;$