


- ① Create a node.
- ② Assign the value to the data field.
- ③ Attach the node to the list.


a) If the list is empty.

```

If (head == NULL)
{
    head = ptr;
}
  
```

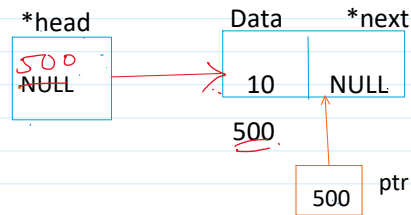

b) If linked list contains nodes

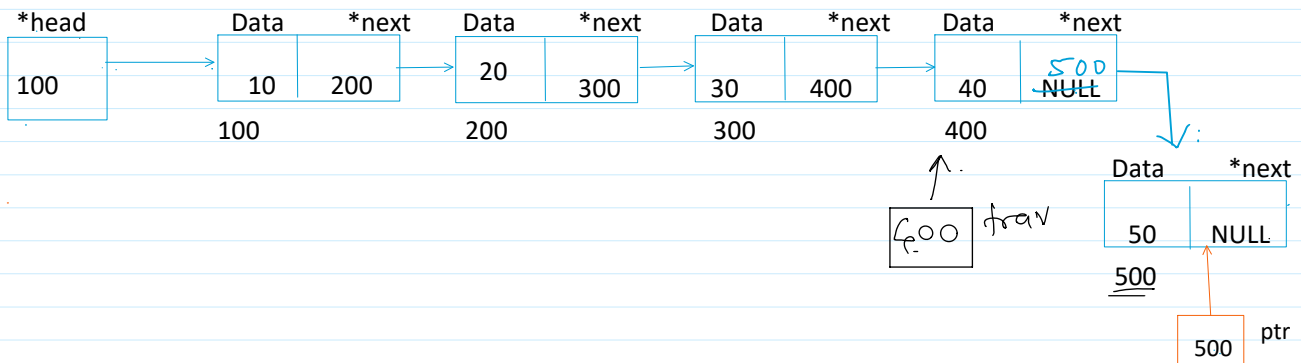

1) Take a trav pointer starting from the first node.
a. Struct node* trav = head;

2) Traverse till the last node.
While(trav->next != NULL)
Trav = trav->next;

3) Attach the new node to the last node of the list.
Trav->next = ptr;

$400 \rightarrow \text{next} = 500$
 $\text{trav} \rightarrow \text{next} = \text{ptr};$