
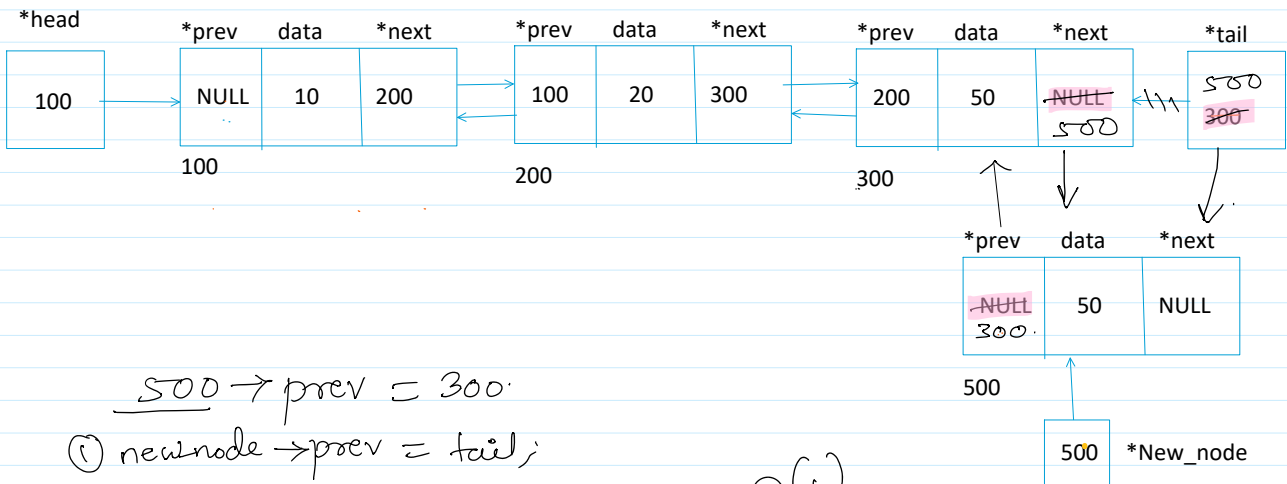


① create a node.  
`node* newnode = createnode();`

② `newnode → data = value;`

③ Attach.

a) `if (head == NULL)`  
`{`  
`head = newnode;`  
`tail = newnode;`  
`}`

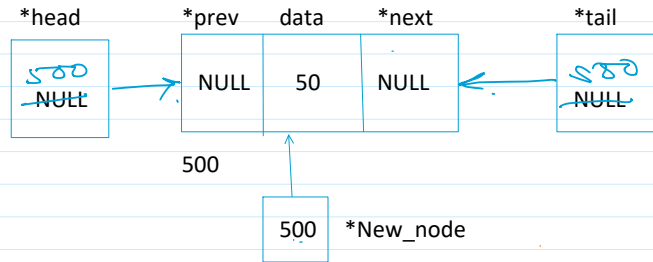

500 → prev = 300.  
 ① `newnode → prev = tail;`  
 300 → next = 500;  
 ② `tail → next = newnode;`  
 tail = 500;  
 ③ `tail = newnode;`

O(1)

struct node  
`{`

`struct node *prev;`  
`int data;`  
`struct node *next;`

`};`

```
struct node* create_node()
```

```
{
```

```
    struct node* pte = malloc(sizeof(struct node));
```

```
    pte->data = 0;
```

```
    pte->next = NULL;
```

```
    pte->prev = NULL;
```

```
    return pte;
```

```
}
```

```
struct node* head = NULL;
```

```
struct node* tail = NULL;
```