

SCLL.

23 April 2024 16:19

① Create a node

node *new_node = create_node();

② Assign the value.

new_node->data = value;

③ Attach.


a) if (head == NULL)

{


head = new_node;

head->next = new_node;

}

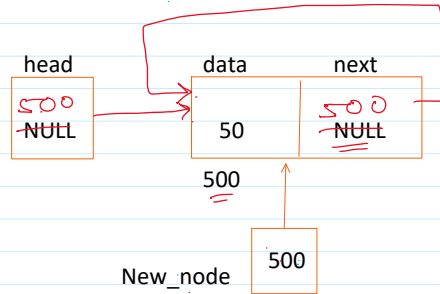

500 → next = 500;

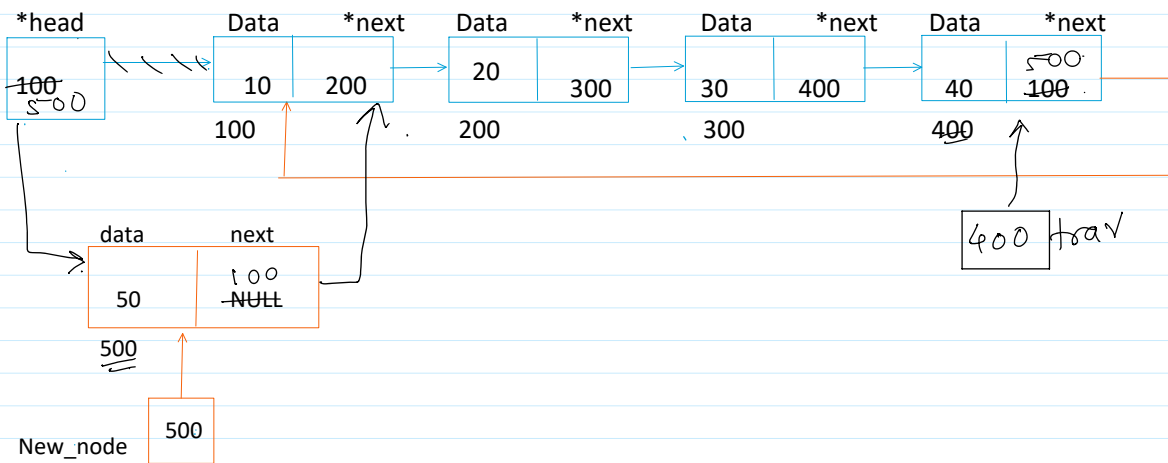

1) Traverse and stop at the last node.

Struct node *trav = head;

While(trav->next != head)

Trav = trav->next;

Best Case : if the list is empty : O(1)

Worst/ avg : if the list has multiple nodes : O(n)

2) Link the new node to the first node.

New_node->next = head;

3) Update the head pointer to point to the new node.

Head = new_node;

4) Update the next field of the last node to point to the new first node.

Trav->next = head;