
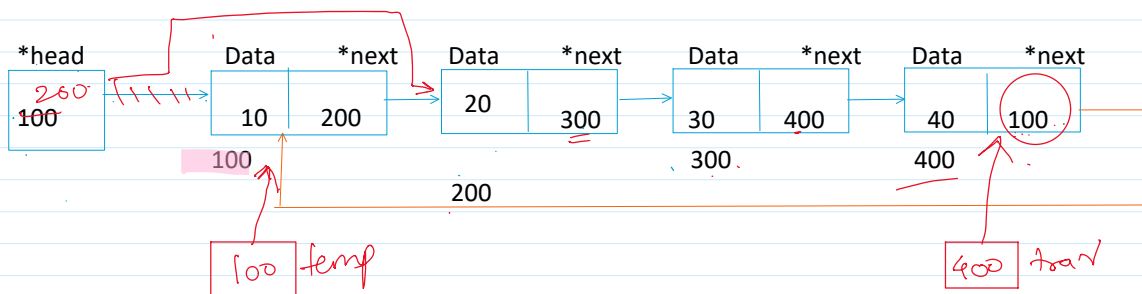


If (head == NULL)
printf ("Empty");

if (head->next == head.)
{
free(head);
head = NULL;
}

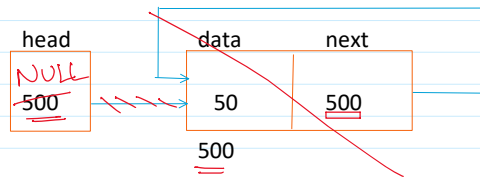

- 1) Traverse till the last node.
Struct node *trav = head;

While(trav->next != head)
Trav = trav->next;

Best Case : if the list is having only one node. : O(1)
Worst / avg : O(n)

- 2) Take a backup of the first node.
Struct node* temp = head;

- 3) Update the head pointer to point to the second node.
Head = head->next;
OR
Head = temp->next;

- 4) Free the temp node.
Free(temp);
Temp = NULL;

- 5) Update the next field of the last node.
Trav->next = head;