



Delete 1st node.

27 May 2025 12:06

① If the list is Empty.
print $\rightarrow$ nothing to delete.

② If $(\text{head} \rightarrow \text{next} == \text{NULL})$

```
{
    free(head);
    head = NULL;
}
```

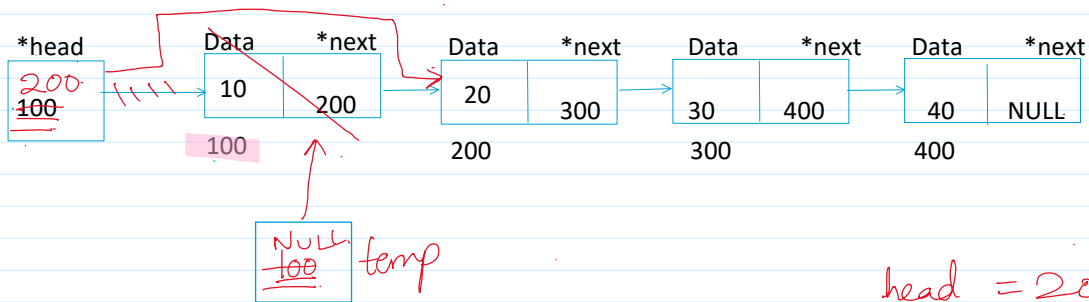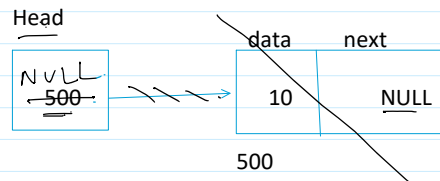

head = 200;
100 $\rightarrow$ next;
head temp.

head = head $\rightarrow$ next;
OR.
head = temp $\rightarrow$ next;

1) Take the backup of the first node in the temp pointer variable.

Struct node* temp = head;

2) Update the head pointer to point to the second node of the list.

Head = head $\rightarrow$ next

3) Free the temp node.

Free(temp);

Temp = NULL;

Best Case : if list has only 1 node : $O(1)$

Worst / Avg : if the list has multiple nodes : $O(1)$