



① `if (head == NULL)`
`printf("Empty");`

② `if (head->next == NULL)`
`{`

`free(head);`

`head = NULL;`

`}`

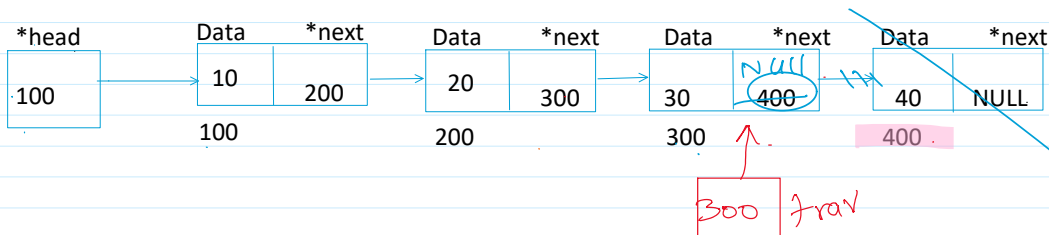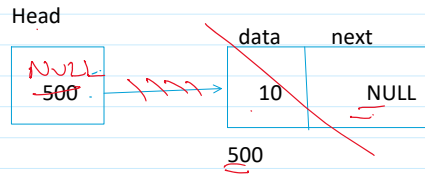

$300 \neq \text{NULL}$.

$400 \neq \text{NULL}$.

$\text{X}(\text{NULL}) = \text{NULL}$.

$300 \rightarrow 400 \rightarrow \text{NULL}$
`while (trav->next->next != NULL)`
`trav = trav->next;`

`free(trav->next);`
`trav->next = NULL;`

Best Case : if the list has only 1 node : $O(1)$

Worst / avg : if the list has multiple nodes. $O(n)$