


```

J Sort_Employees_Salaries_BubbleSort.java > Sort_Employees_Salaries_BubbleSo
1  import java.util.*;
2  public class Sort_Employees_Salaries_BubbleSort {
    Run | Debug
3      public static void main(String[] args) {
4          Scanner sc = new Scanner(System.in);
5          System.out.println(x: "enter number of employees");
6          int n = sc.nextInt();
7          int wow[] = new int[n];
8          System.out.println(x: "enter employees saleries");
9          for(int i = 0; i < n; i++) {
10             wow[i] = sc.nextInt();
11         }
12         for(int i = 0; i < n - 1; i++) {
13             for(int j = 0; j < n - i - 1; j++) {
14                 if(wow[j] > wow[j + 1]) {
15                     int temp = wow[j];
16                     wow[j] = wow[j + 1];
17                     wow[j + 1] = temp;
18                 }
19             }
20         }
21         for(int i=0;i<n;i++)
22             System.out.print(wow[i] + " ");
23     }
24 }
25
26

```

CHAT

✓ TERMINAL

3rd Yr Week 2 Module>

```
...
Sort_Employees_Salaries_BubbleSort }
enter number of employees
5
enter employees saleries
45000
32000
55000
28000
60000
28000 32000 45000 55000 60000
PS C:\Users\sachi\Desktop\collage_mod>
3rd Yr Week 2 Module> |
```

/ CHAT

SESSIONS

Tip: Try the **Plan agent** to research and plan before implementing changes.

Sort_Website_Response_Time_InsertionSort.java 1 ×

```

1  import java.util.*;
2  public class Sort_Website_Response_Time_InsertionSort {
    Run | Debug
3      public static void main(String[] args) {
4          Scanner sc = new Scanner(System.in);
5          System.out.println(x: "enter number");
6          int n = sc.nextInt();
7          int wow[] = new int[n];
8          System.out.println(x: "enter response time");
9          for(int i = 0; i < n; i++) {
10             wow[i] = sc.nextInt();
11         }
12         for(int i = 1; i < n; i++) {
13             int key = wow[i];
14             int j = i - 1;
15             while(j >= 0 && wow[j] > key) {
16                 wow[j + 1] = wow[j];
17                 j--;
18             }
19             wow[j + 1] = key;
20         }
21         System.out.println(x: "output:-");
22         for(int i=0;i<n;i++)
23             System.out.print(wow[i] + " ");
24     }
25 }

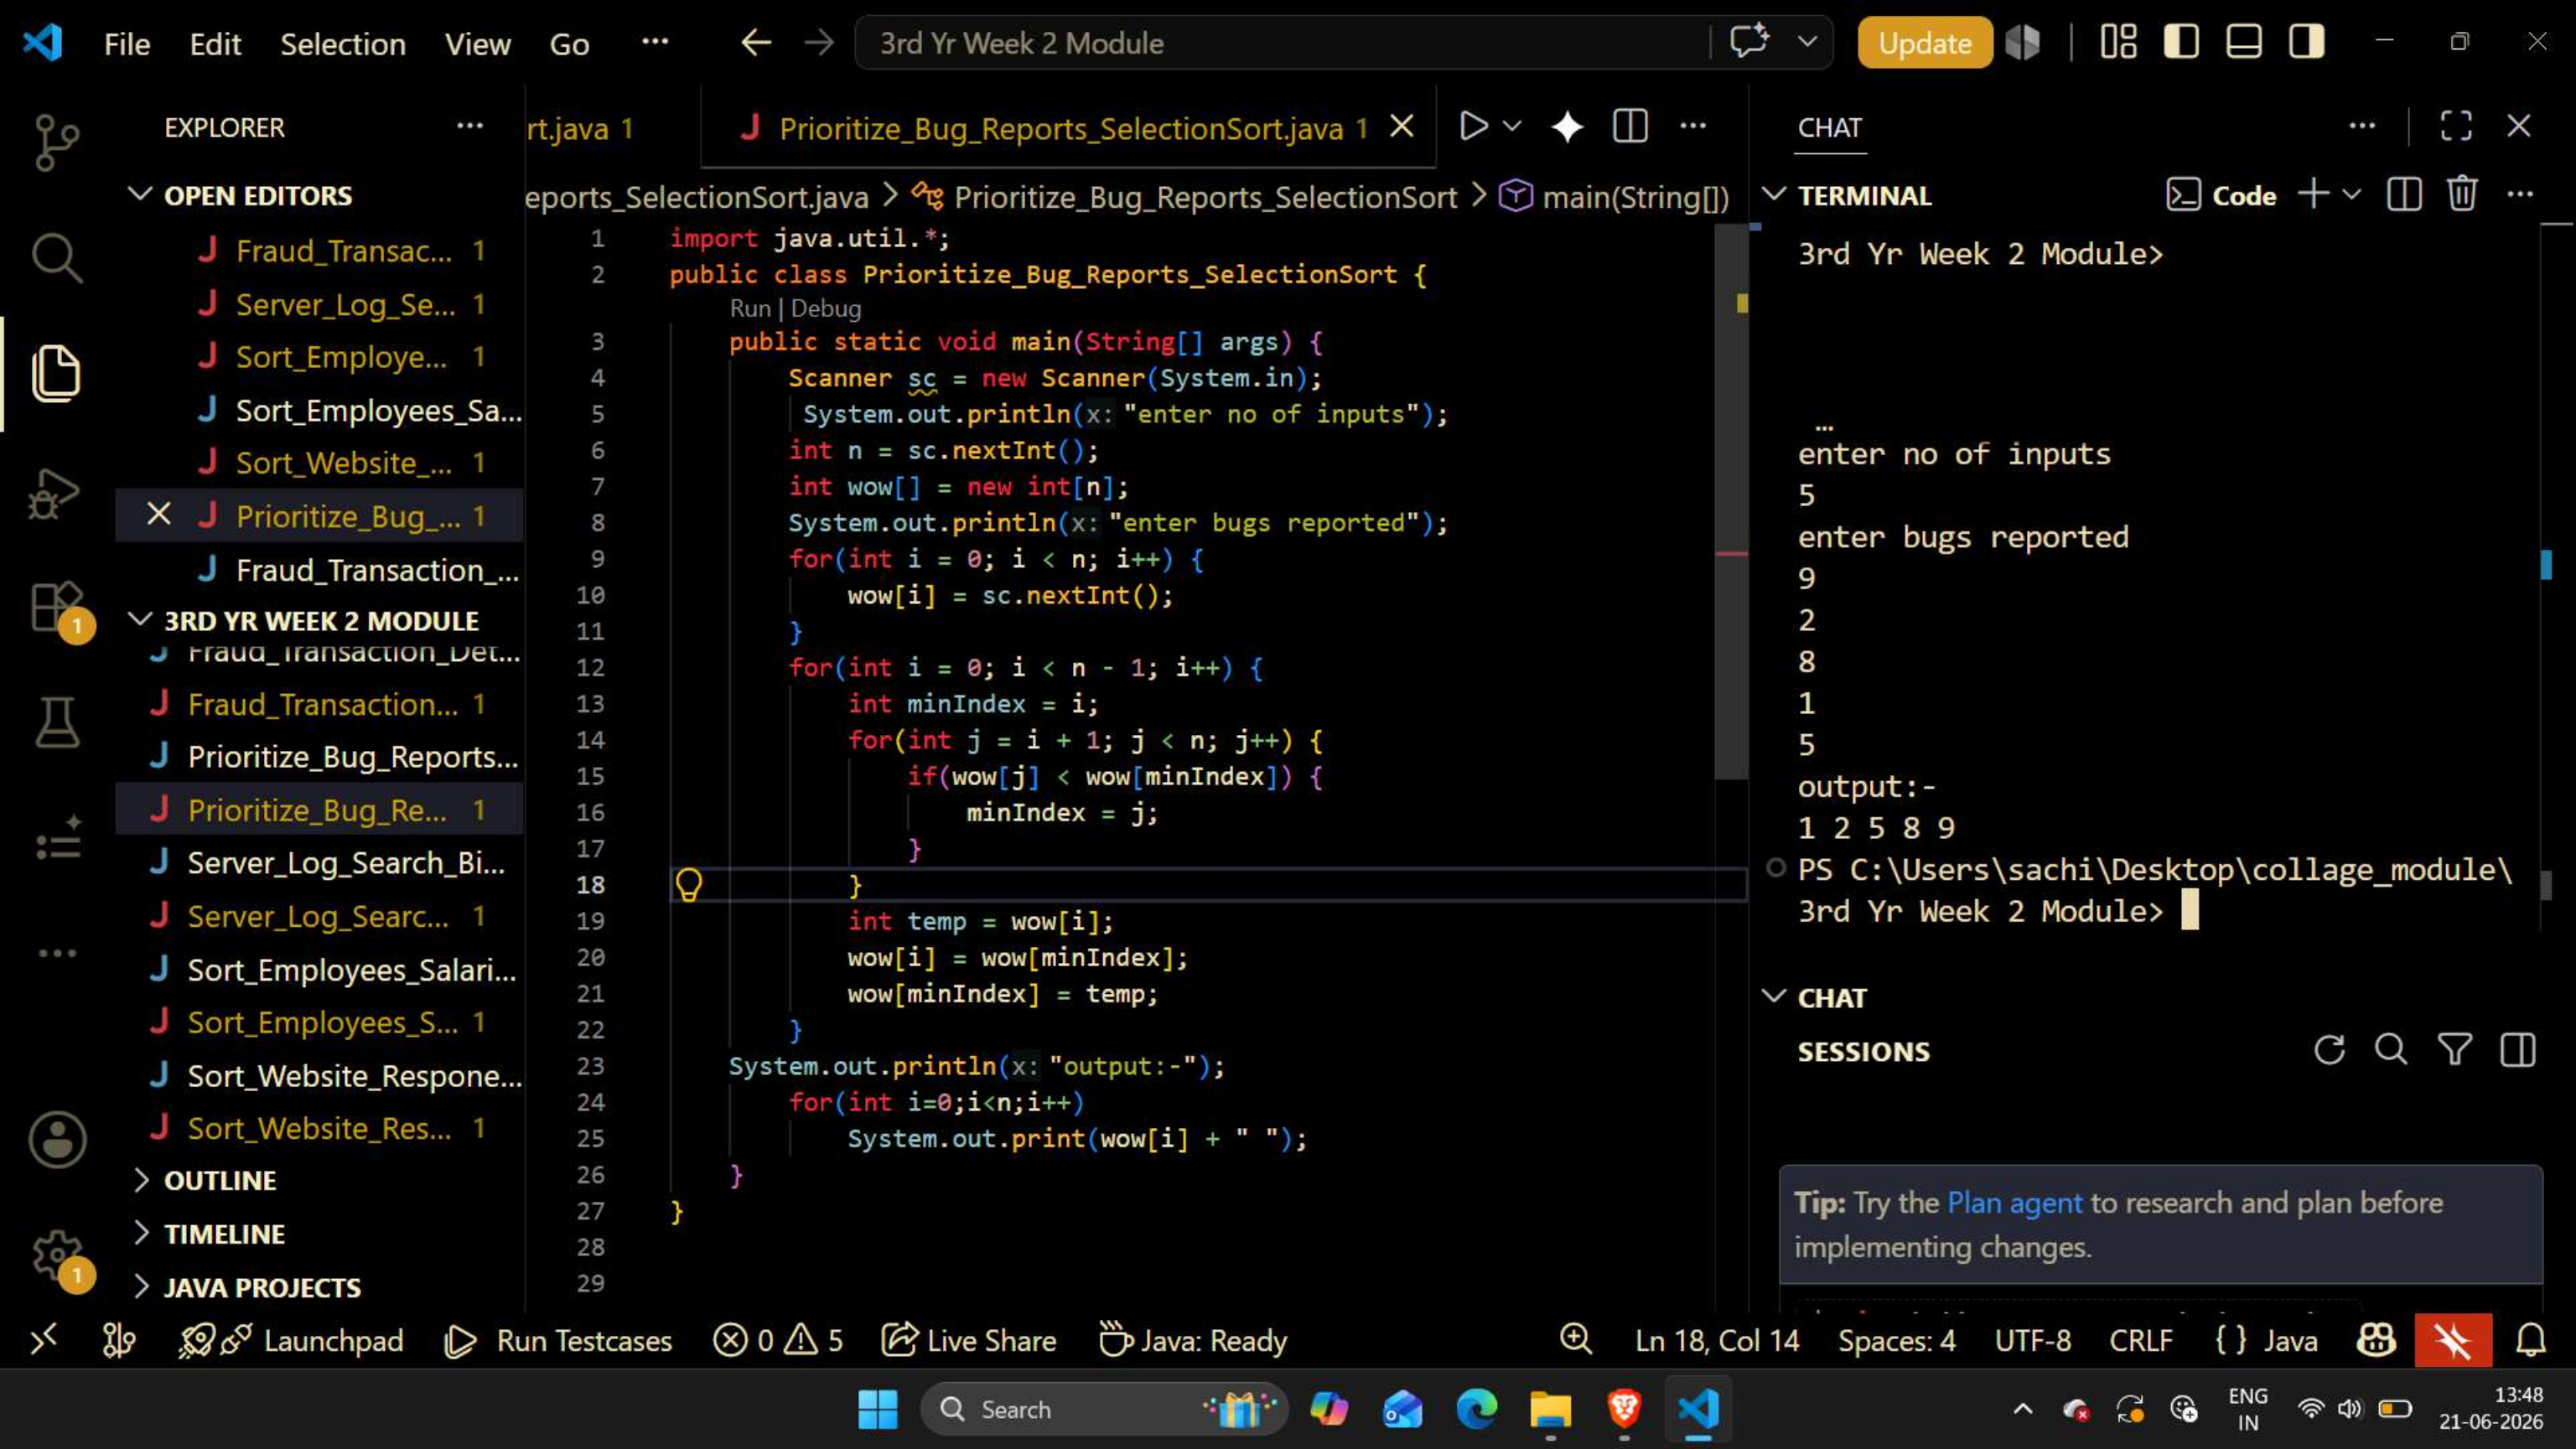
```

```
CHAT
... | [ ] X
✓ TERMINAL [ ] Code + ✓ [ ] [ ] ...
3rd Yr Week 2 Module>

...
enter number
5
enter response time
250
120
320
180
100
output:-
100 120 180 250 320
PS C:\Users\sachi\Desktop\collage_module\
3rd Yr Week 2 Module>

✓ CHAT
SESSIONS [ ] [ ] [ ] [ ]

Tip: Try the Plan agent to research and plan before
implementing changes.
```

2. Fraud Transaction Detection Using Linear Search in Java

```
import java.util.Scanner;  
public class Fraud_Transaction_Detection_LinearSearch {  
    public static void main(String[] args) {  
        Scanner sc = new Scanner(System.in);  
        System.out.println("Enter no of transaction");  
        int n = sc.nextInt();  
        System.out.println("enter transactions ");  
        int arr[] = new int[n];  
        for (int i = 0; i < n; i++) {  
            arr[i] = sc.nextInt();  
        }  
        System.out.println("enter target value");  
        int target = sc.nextInt();  
        int val = 1;  
        for (int i = 0; i < n; i++) {  
            if (arr[i] == target) {  
                val = 0;  
            }  
        }  
        if (val == 1) {  
            System.out.println("Transaction Not Found");  
        } else {  
            System.out.println("Fraud Transaction Found");  
        }  
    }  
}
```

Output (Example):

```
Enter no of transaction  
5  
enter transactions  
1000 2500 3000 1500 4000  
enter target value  
3000  
Fraud Transaction Found
```


1. Server Log Search using Binary Search in Java

```
import java.util.*;
public class Server_Log_Search_BinarySearch {
    public static void main(String[] args) {
        Scanner sc = new Scanner(System.in);
        System.out.println("Enter no of server logs");
        int n = sc.nextInt();
        System.out.println("Enter logs values");
        int arr[] = new int[n];
        for (int i = 0; i < n; i++) {
            arr[i] = sc.nextInt();
        }
        System.out.println("Enter target");
        int target = sc.nextInt();
        int low = 0, high = n - 1;
        int found = 0;
        while (low <= high) {
            int mid = (low + high) / 2;
            if (arr[mid] == target) {
                found = 1;
                break;
            }
            else if (arr[mid] < target)
                low = mid + 1;
            else
                high = mid - 1;
        }
        if (found == 1)
            System.out.println("Log Found");
        else
            System.out.println("Log Not Found");
    }
}
```

Input (Example):

Enter no of server logs

7

Enter logs values

1001 1005 1010 1015 1020 1030 1040

Enter target

1015

Output :

Log Found

1. Bubble Sort of Employee Salaries in Java

```
import java.util.*;
public class Sort_Employees_Salaries_BubbleSort {
    public static void main(String[] args) {
        Scanner sc = new Scanner(System.in);
        System.out.println("enter number of employees");
        int n = sc.nextInt();
        int wow[] = new int[n];
        System.out.println("enter employees salaries");
        for(int i = 0; i < n; i++) {
            wow[i] = sc.nextInt();
        }
        for(int i = 0; i < n - 1; i++) {
            for(int j = 0; j < n - i - 1; j++) {
                if(wow[j] > wow[j + 1]) {
                    int temp = wow[j];
                    wow[j] = wow[j + 1];
                    wow[j + 1] = temp;
                }
            }
        }
        for(int i = 0; i < n; i++) {
            System.out.print(wow[i] + " ");
        }
    }
}
```

Input (Example):

enter number of employees

5

enter employees salaries

45000 32000 55000 28000 60000

Output:

28000 32000 45000 55000 60000

1. Sort Website Response Time using Insertion Sort in Java

```
import java.util.*;
public class Sort_Website_Response_Time_InsertionSort {
    public static void main (String[] args) {
        Scanner sc = new Scanner (System.in);
        System.out.println ("enter number");
        int n = sc.nextInt();
        int wow[] = new int[n];
        System.out.println ("enter response time");
        for (int i = 0; i < n; i++) {
            wow[i] = sc.nextInt();
        }
        for (int i = 1; i < n; i++) {
            int key = wow[i];
            int j = i - 1;
            while (j >= 0 && wow[j] > key) {
                wow[j + 1] = wow[j];
                j--;
            }
            wow[j + 1] = key;
        }
        System.out.println ("output:-");
        for (int i = 0; i < n; i++) {
            System.out.print (wow[i] + " ");
        }
    }
}
```

Input (Example):

enter number

5

enter response time

250

120

320

180

100

Output:

output:-

100 120 180 250 320

1. Bug Tracking System using Linear Search in Java

```
import java.util.Scanner;
public class Bug_Tracking_LinearSearch {
    public static void main(String[] args) {
        Scanner sc = new Scanner(System.in);
        System.out.println("enter no of inputs");
        int n = sc.nextInt();
        System.out.println("enter bugs reported");
        int arr[] = new int[n];
        for (int i = 0; i < n; i++) {
            arr[i] = sc.nextInt();
        }
        int target = arr[0];
        for (int i = 1; i < n; i++) {
            if (arr[i] < target) {
                target = arr[i];
            }
        }
        System.out.print(target + " ");
        for (int i = 0; i < n; i++) {
            if (arr[i] != target) {
                System.out.print(arr[i] + " ");
            }
        }
        sc.close();
    }
}
```

Output (Example):

```
enter no of inputs
5
enter bugs reported
9
2
8
1
5
```

Output :-

1 2 5 8 9