

A Tutorial on Data Virtualization within IBM Cloud Private for Data

Sanjit Chakraborty

Table of Contents

| | |
|--|----|
| INTRODUCTION..... | 3 |
| 1. ACCESS CREDENTIALS..... | 4 |
| 1.1. ACCESS CREDENTIAL FOR DB2 DATABASE | 4 |
| 1.2. ACCESS CREDENTIAL FOR INFORMIX DATABASE | 4 |
| 1.3. SETTING UP THE DATABASES AND SAMPLE TABLES | 4 |
| 1.4. SIGN IN TO ICP FOR DATA WEB CONSOLE AS ADMINISTRATOR..... | 5 |
| 2. CREATE ANALYTIC PROJECT | 6 |
| 3. DATA VIRTUALIZATION | 7 |
| 3.3. ADDING A NEW DATA SOURCE FOR INFORMIX..... | 8 |
| 3.4. SELECT TABLES FOR VIRTUALIZATION | 9 |
| 3.5. CREATING VIRTUAL TABLE | 10 |
| 3.6. PUBLISH VIRTUALIZED TABLE | 12 |
| 3.7. ACCESS INFORMATION FOR VIRTUAL TABLE..... | 12 |
| 4. VIRTUAL TABLE FROM IDE | 13 |
| 4.1. START IDE | 13 |
| 4.2. LAUNCH RSTUDIO | 13 |
| 4.3. LOAD R SCRIPT | 13 |
| 4.4. RUN THE SCRIPT..... | 15 |

Introduction

In this tutorial, you will learn how to use Data Virtualization (DV) add-on component within the IBM® Cloud Private for Data (ICP for Data) to integrates data sources across multiple types and locations and turns it into one logical data view. Creating connections to your data sources enables you to quickly view across your organization's data. This virtual data platform enables real-time analytics without moving data, ETLs, and additional storage requirements, so processing times are greatly accelerated. This produces real-time intuitive results quickly and dependably.

Tutorial will use two different data sources from Db2 and Informix. On Db2, you have MORTGAGE_CUSTOMER table that stores individual customer information, those who applied for mortgage loan. Other hand at Informix side, you have MORTGAGE_DEFAULT table that tracks default status of individual mortgage. Using these two tables you need to find out which RESIDENCE type mostly default on mortgage.

| Table MORTGAGE_CUSTOMER on Db2 | | | Table MORTGAGE_DEFAULT on Informix | | |
|--------------------------------|--|-----------|------------------------------------|--|-----------|
| Column Name | | Data Type | Column Name | | Data Type |
| APPLIED_ONLINE | | CHAR | id | | INTEGER |
| CARD_DEBT | | INTEGER | mortgage_default | | CHAR |
| CURRENT_LOANS | | INTEGER | | | |
| ID | | INTEGER | | | |
| INCOME | | INTEGER | | | |
| LOAN_AMOUNT | | INTEGER | | | |
| NO_OF_CARDS | | SMALLINT | | | |
| RESIDENCE | | CHAR | | | |
| YRS_CURRENT_ADD | | SMALLINT | | | |
| YRS_CURRENT_EMP | | SMALLINT | | | |

Using DV you will create a virtual table from above two data sources. Next use a R script to access the virtual table and find out the solution. There is absolutely no need of moving data, ETLs, and additional storage.

Before you continue with this tutorial make sure DV and RStudio are provisioned on your environment. Both are add-on components in ICP for Data.

This tutorial has been developed based on ICP for Data v.1.2.1.

1. Access Credentials

To work through the demo, you need access to Db2 and Informix databases. You will use following access credential while define data sources.

1.1. Access credential for Db2 database

JDBC connection credential for Db2:

| | |
|------------------------|--|
| JDBC Host name | <Same IP address as your web console> |
| Port number | 50000 |
| Database name | MORTGAGE |
| User ID | db2inst1 |
| Password | password |
| Db2 | Version 11.1 |
| JDBC connection string | jdbc:db2://<same IP as Web Console>:50000/MORTGAGE |

1.2. Access credential for Informix database

JDBC connection credential for Informix:

| | |
|------------------------|---|
| JDBC Host name | <Same IP address as your web console> |
| Port number | 9088 |
| Database name | MORTGAGEDB |
| User ID | informix |
| Password | in4mix |
| Informix | Version 12.10.FC12W1DE |
| JDBC connection string | jdbc:informix-sqli://<same IP as Web console>:9088/mortgagedb: INFORMIXSERVER=informix;user=informix;password=in4mix |

1.3. Setting up the databases and sample tables

This tutorial host Db2 and Informix server instances in Docker containers and load sample data to respective databases. You need to run this setup step from command prompt as user root.

a) Log in to the cluster where ICP for Data is deployed.

b) From your home directory, clone the tutorial sample files:

```
git clone https://github.com/sanjitc/ icp4d-tutorials.git  
or  
git clone https://github.com/IBM-ICP4D/icp4d-tutorials.git
```

c) Change to the tutorials directory:

```
cd icp4d-tutorials/tutorials
```

d) Run the following command to load the sample data into a Db2 database:

```
./load_samples.sh -t mortgage-001
```

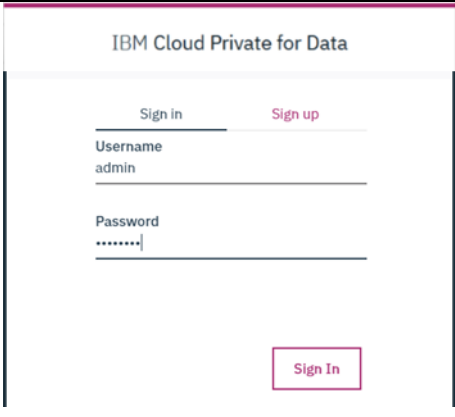
e) Run the following command to load the sample data into an Informix database:

```
./load_samples.sh -t data-virtualization-001
```

f) After data loading completes, Db2 and Informix are hosted on your cluster as a Docker container.

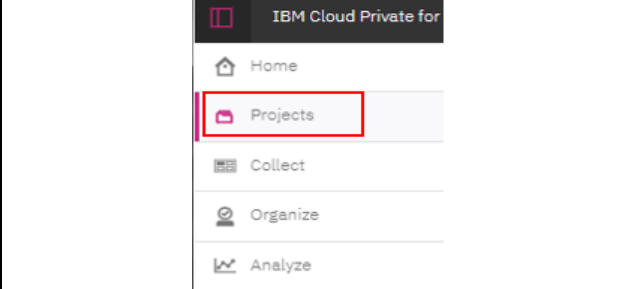

1.4. Sign in to ICP for Data web console as Administrator

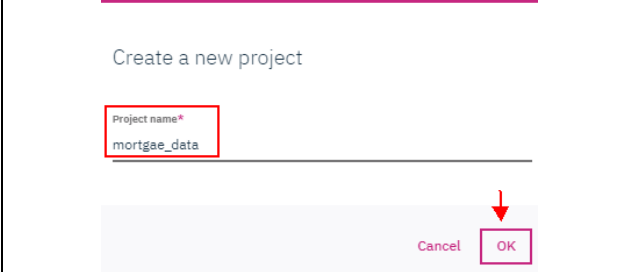
You should use latest version of Firefox or Google Chrome browser to access the ICP for Data web console. Starting from here all instruction needs to execute on ICP for Data web console only. You need to login as admin who has administrator privileges.

| | |
|--|--|
|  | <p>Sign in to the ICPD web console as user 'admin' and password is 'password'.</p> |
|--|--|

2. Create analytic project

Create an analytic project that you going to use for virtualizing data.

| | |
|---|--|
|  | <p>Select 'Projects' from right pane to create a new analytical project</p> <p>Click on the  New project icon</p> |
|---|--|

| | |
|---|--|
|  | <p>Provide a project name as mortgage_data and click OK</p> <p>On the next 'Create project' window, click on Create</p> |
|---|--|

3. Data Virtualization

Data virtualization (DV) integrates data sources across multiple types and locations and turns it into one logical data view. Creating connections to your data sources enables you to quickly view across your organization's data.

3.1. Giving users access to data virtualization (optional)

In order for a user to have access to the data virtualization service, you must assign them to appropriate data virtualization roles.

This is for information only. In this demo you will use user 'admin', which has all necessary virtualization roles.

ADD USERS

Grant access to users

Find

| <input type="checkbox"/> | Name | Username | Role |
|-------------------------------------|-------|----------|----------|
| <input checked="" type="checkbox"/> | admin | admin | Admin |
| <input checked="" type="checkbox"/> | deng1 | deng1 | Engineer |
| <input checked="" type="checkbox"/> | dst1 | dst1 | User |
| <input checked="" type="checkbox"/> | dstw1 | dstw1 | User |

1. Select **Collect > Virtualize data** from left pane
2. Select **Menu > Manage users > Add users** from top
3. Check all users that you created earlier and keep their default role.
4. Click **Add**

3.2. Adding a new data source for Db2

DV supports many relational and non-relational data sources, as well as files that reside on a local disk or network file system, that you can add to your data source ecosystem. After a data source has been added, any user that has virtualize permission has the ability to create virtual tables. DV agents connect to relational data sources using JDBC protocol. In this tutorial you will add two data sources, one for Db2 and other one for Informix.

Define a data connection to Db2. Use following connection information with 'Add connection'. If you already have an existing database connection, select that for Db2 data source.

Add data source ⓘ

Connect to the data source Step 2 of 2

Data source type
Db2 Family

Host name
[Redacted]

Port
50000

Database Name
MORTGAGE

Username
db2inst1

Password

Options
Enter JDBC connection options

☐ Use SSL
☐ Verify server SSL certificate ⓘ
SSL certificate (optional)

Cancel Back Add

1. Go to **Collect > Virtualized data > Menu > Data sources**
2. Click **Add data source > New data source**
3. Update data source with following information:
Data source type = Db2
Host name = <IP of node 1>
Port = 50000
Database Name = MORTGAGE
Username = db2inst1
Password = password
4. Click **Add**

3.3. Adding a new data source for Informix

Let's add a new data source for the Informix. First define a data connection to Informix. Use following connection information with 'Add connection'. If you already have an existing database connection, select that for Informix data source.

Edit connection ⓘ

Data source type
Informix

Host name
[Redacted]

Port
9088

Database Name
mortgagedb

Username
informix

Password

Informix server
informix

Options
Enter JDBC connection options

☐ Use SSL

1. Go to **Collect > Virtualized data > Menu > Data sources**
2. Click **Add data source > New data source**
3. Update data source with following information:
Data source type = Informix
Host name = <IP of node 1>
Port = 9088
Database Name = mortgagedb
Username = informix
Password = in4mix
Informix server = informix
4. Click **Add**

3.4. Select tables for virtualization

The most common mechanism for virtualizing data is to create a "view" or virtual table. Virtual table can be full or segment of data from one or more tables. You can then run queries against the resulting virtual table.

Data virtualization | Virtualize

Find tables by name, schema, or column.

Filters

Available tables

Automatically group tables

View cart (0)

7 tables

Add to cart

| Table | Schemas | Databases |
|---|------------|------------|
| <input checked="" type="checkbox"/> MORTGAGE_CUSTOMER | DB2INST1 | mortgage |
| <input type="checkbox"/> MORTGAGE_DEFAULT | DB2INST1 | mortgage |
| <input type="checkbox"/> MORTGAGE_JOIN | DB2INST1 | mortgage |
| <input type="checkbox"/> MORTGAGE_PROPERTY | DB2INST1 | mortgage |
| <input checked="" type="checkbox"/> mortgage_default | "informix" | mortgagedb |
| <input type="checkbox"/> sysdomains | "informix" | mortgagedb |
| <input type="checkbox"/> sysindexes | "informix" | mortgagedb |

1. Click **Collect > Virtualized data > Menu > Virtualize**
2. Select three tables **MORTGAGE_CUSTOMER** from MORTGAGE database and **mortgage_default** from mortgagedb, then click **Add to cart**
3. Click **View cart**
4. Click **Next**

1. Select **project** to assign virtualized table to your analytics project. Then, choose the **mortgage_data** project.
2. Choose **publish to catalog** for include virtualized table to the data catalog. This operation will create a publishing request, a data steward must approve the request before the asset is added to the enterprise data catalog.
3. Click **Virtualize** to complete the process

Assign and manage your virtual tables below.

Cancel Back Virtualize

Assign to

☐ Data request *i* ☒ Project *i* ☐ None

mortgage_data

Publish to catalog *i*

☒ Yes ☐ No

To be virtualized

| Table | Schema |
|-------------------|---------|
| MORTGAGE_CUSTO... | USER999 |
| mortgage_default | USER999 |

3.5. Creating virtual table

You can create a new virtual table based on existing tables. Join source tables and create the virtual table.

1. Click **Collect** > **Virtualized data** > **Menu** > **My data** to see your virtualized tables.
2. Check **MORTGAGE_CUSTOMER** and **mortgage_default** tables for join.
3. Click on **Join view**
4. Uncheck the ID column from mortgage_default table for reduction redundancy
5. Click and drag from one **ID** column to another to create a join key. Both join keys must be of the same data type.
6. Click **Join**

Join virtual objects

Click and drag from one table to the other to create a join key.

Table 1: MORTGAGE_CUSTOMER

Find

| <input checked="" type="checkbox"/> | Column Name | Data Type |
|-------------------------------------|-----------------|-----------|
| <input checked="" type="checkbox"/> | CURRENT_LOANS | INTEGER |
| <input checked="" type="checkbox"/> | ID | INTEGER |
| <input checked="" type="checkbox"/> | INCOME | INTEGER |
| <input checked="" type="checkbox"/> | LOAN_AMOUNT | INTEGER |
| <input checked="" type="checkbox"/> | APPLIED_ONLINE | CHAR |
| <input checked="" type="checkbox"/> | CARD_DEBT | INTEGER |
| <input checked="" type="checkbox"/> | NO_OF_CARDS | SMALLINT |
| <input checked="" type="checkbox"/> | RESIDENCE | CHAR |
| <input checked="" type="checkbox"/> | YRS_CURRENT_ADD | SMALLINT |

Table 2: mortgage_default

Find

| <input type="checkbox"/> | Column Name | Data Type |
|-------------------------------------|------------------|-----------|
| <input type="checkbox"/> | id | INTEGER |
| <input checked="" type="checkbox"/> | mortgage_default | CHAR |

Join two virtual tables [Open in SQL editor](#)

Filters

MORTGAGE_CUSTOMER | mortgage_defa

Enter filter predicates

Join Keys

| MORTGAGE_CUSTO... | mortgage_default |
|-------------------|------------------|
| INT ID | INT id |

Cancel Preview **Join**

Name the view as **CUSTOMER_DEFAULT**, then click **Next**. Make sure use uppercase for view name.

Join virtual objects: Review

Name and review your joined virtual table.

Cancel Back **Next**

View Name

CUSTOMER_DEFAULT

Schema Name

USER999

X

Preview

| APPLIED_ONLINE | CARD_DEBT | CURRENT_LOANS | ID | id | INCOME | LOAN_AMOUNT | mortgage_default |
|----------------|-----------|---------------|--------|----|--------|-------------|------------------|
| Y | 2698 | 1 | 101600 | 0 | 45537 | 8885 | YES |
| Y | 44 | 0 | 101731 | 1 | 49789 | 9340 | NO |
| Y | 645 | 1 | 100548 | 2 | 44272 | 10095 | YES |
| Y | 9466 | 1 | 101472 | 3 | 45659 | 17050 | NO |
| N | 2327 | 1 | 100562 | 4 | 45103 | 5575 | YES |
| Y | 684 | 1 | 100766 | 5 | 57376 | 9845 | YES |

1. Select **project** to assign virtualized table to your analytics project. Then, choose the **mortgage_data** project.
2. Click **Create view**

Join virtual objects: Assign

Assign and manage your new joined view below.

Cancel Back **Create view**

Assign to

☐ Data request ☒ Project ☐ None

mortgage_data

View

CUSTOMER_DEFAULT

Schema

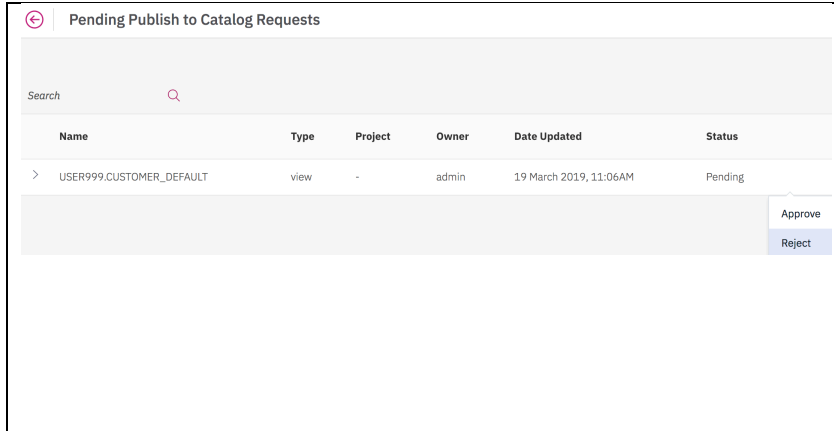
USER999

Publish to catalog



☒ Yes ☐ No

3.6. Publish virtualized table

A data steward needs approve the published request before the asset is added to the enterprise data catalog. You signed in as user 'admin', it should allow to publish the virtual table.



The screenshot shows a web interface titled "Pending Publish to Catalog Requests". It features a search bar and a table with columns: Name, Type, Project, Owner, Date Updated, and Status. A single entry is listed: "USER999.CUSTOMER_DEFAULT" with Type "view", Project "-", Owner "admin", Date Updated "19 March 2019, 11:06AM", and Status "Pending". To the right of the table, there are "Approve" and "Reject" buttons.





1. Click on  access the **Home** page
2. Click on **Pending Publish to Catalog Requests**
3. Click on  icon on left for virtual table **CUSTOMER_DEFAULT** that you created
4. Click on **Approve**

3.7. Access information for virtual table

To access virtual table from external application, you need the JDBC connection information. Click on **Collect > Virtualized data > Menu > Service details** to find out access information.

[Virtualized data](#)[Virtualize](#)[SQL editor](#)[Data sources](#)[Manage users](#)[Connection details](#)[About](#)

Access information

| | | |
|----------------------------|---|---|
| Username | user999 |  |
| Password | myS-u#C-5#TE419e |   |
| JDBC connection URL | jdbc:db2://dv-server.zen.svc.cluster... |  |

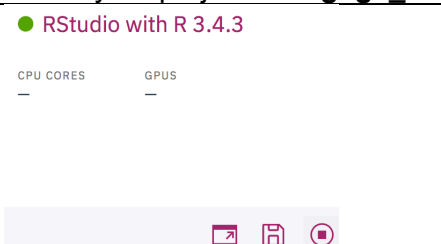
4. Virtual Table From IDE


You can access virtual table from inside or outside of ICP for Data. In this example a R script used for accessing the virtual table. ICP for Data comes with an add-on RStudio component that provides an Integrated Development Environment (IDE) for working with R.

4.1. Start IDE

Make sure IDE has started before you can use it.

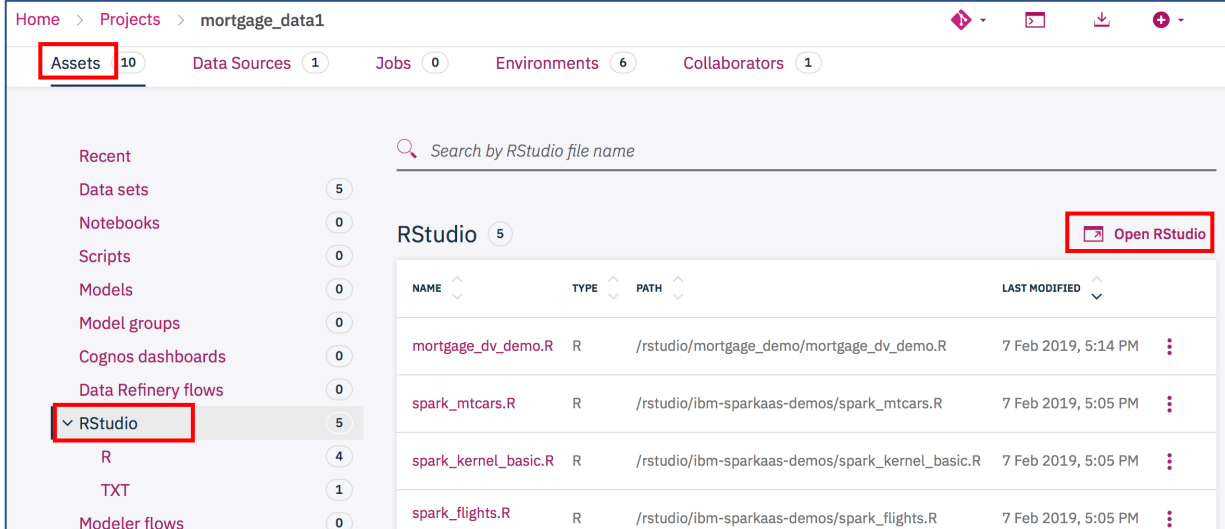
Select your project **mortgage_data** from project menu



Choose **Environments** tab. If RStudio not running, click on  icon to start.

4.2. Launch RStudio

From inside the analytic project, choose **Assets > RStudio** and click on **Open RStudio**.



Home > Projects > mortgage_data1


Assets 10 Data Sources 1 Jobs 0 Environments 6 Collaborators 1

Recent

- Data sets 5
- Notebooks 0
- Scripts 0
- Models 0
- Model groups 0
- Cognos dashboards 0
- Data Refinery flows 0
- RStudio 5**
- R 4
- TXT 1
- Modeler flows 0

Search by RStudio file name

RStudio 5



| NAME | TYPE | PATH | LAST MODIFIED |
|----------------------|------|---|---------------------|
| mortgage_dv_demo.R | R | /rstudio/mortgage_demo/mortgage_dv_demo.R | 7 Feb 2019, 5:14 PM |
| spark_mtcars.R | R | /rstudio/ibm-sparkaaas-demos/spark_mtcars.R | 7 Feb 2019, 5:05 PM |
| spark_kernel_basic.R | R | /rstudio/ibm-sparkaaas-demos/spark_kernel_basic.R | 7 Feb 2019, 5:05 PM |
| spark_flights.R | R | /rstudio/ibm-sparkaaas-demos/spark_flights.R | 7 Feb 2019, 5:05 PM |

4.3. Load R script

Within the RStudio, go to File > New File > R script to run script. Copy the following script and paste it in the source section. This simple R script will simply run a SELECT statement against the virtual table and retrieve data and create a treemap to visually displays mortgage default by residency type.

Before you run the script, please change the **url**, **databaseUsername** and **databasePassword** according to your system, which you found in step 3.7 (Access information for virtual table).

```
#####
### This is a sample R code that access the virtual table from Data Virtualization environment and create a treemap
### to visually displays mortgage default by residency type.
###
### Before executing the R script update URL, databaseUsername and databasePassword variables according to your environment .
### Variable values can be found in 'Collect -> Virtualized data -> Menu -> Service details' section in Data Virtualization environment.
#####

library(RJDBC)                # Load the "RJDBC" package
library(treemap)              # Call the TREEMAP package
library(dplyr)                # Load DPLYR package

driverClassName <- "com.ibm.db2.jcc.DB2Driver" # Load JDBC driver using Class.forName method
driverPath <- "/dbdrivers/db2jcc4.jar"         # Db2 JDBC driver path in RStudio docker image

url <- "<JDBC Connection URL>"                # Update JDBC connection URL according to your
                                              # environment information in 'Collect -> Virtualized
                                              # data -> Menu -> About'

databaseUsername <- "<username>"              # Database user
databasePassword <- "<password>"              # Database user password

drv <- JDBC(driverClassName, driverPath)        # Initialize Java VM and load Java JDBC driver
conn <- dbConnect(drv, url, databaseUsername, databasePassword) # Create JDBC connection using dbConnect()

selStr <- "SELECT * FROM USER999.MORTGAGE_CUSTOMER_DEFAULT
          WHERE \"mortgage_default\" = 'YES';"    # Query string for retrieve dataset

md <- dbSendQuery(conn, selStr)                 # Let's run a query
mortgageData <- fetch(md, -1)                  # Store query result in a data frame

mortgageData1 <- mortgageData %>%              # Expand residency type to meaningful name
  mutate(RESIDENCE = case_when(RESIDENCE == "O" ~ "Owner Occupier",
                               RESIDENCE == "P" ~ "Private Renting",
                               RESIDENCE == "L" ~ "Living With Parents",
                               RESIDENCE == "S" ~ "Sheltered"))

head(mortgageData1)                           # Return first parts of data frame

treemap(mortgageData1,                        # Create a treemap to visually displays,
        index = c("RESIDENCE"),              # mortgage default by residency type.
        vSize = "YRS_CURRENT_EMP",
        title = "Mortgage Default by Residency Type"
        )

dbDisconnect(conn)                            # Disconnect and close the connection
```

If any R package not already installed, you need to install them first before executing the above script. Use **install.packages("<package name>")** command to install a R package.

4.4. Run the script

Highlight the R script in the RStudio and click on **Run** to retrieve data.

The screenshot shows the RStudio interface with a project named 'mortgage_data'. The R script in the editor is as follows:

```
1 library(RJDBC)
2 library(treemap)
3 library(dplyr)
4
5 driverClassName <- "com.ibm.db2.jcc.DB2Driver"
6 driverPath <- "/dbdrivers/db2jcc4.jar"
7
8 url <- "jdbc:db2://dv-server.zen.svc.cluster.local:32051/bigsql"
9 databaseUsername <- "user999"
10 databasePassword <- "myS-uFC-SfTE419e"
11
12 drv <- JDBC(driverClassName, driverPath)
13 conn <- dbConnect(drv, url, databaseUsername, databasePassword)
14
15 selStr <- "SELECT * FROM ICP4D.MORTGAGE_CUSTOMER_DEFAULT
16 WHERE 'mortgage.default' = 'YES';"
17
18 md <- dbSendQuery(conn, selStr)
19
20 # Let's run a query
21 # Show names result in a data frame
22 result <- dbFetch(md)
```

The console output shows the following data:

```
2      20      1 Owner Occupier
3      14      1 Owner Occupier
4      27      2 Private Renting
5       9      1 Private Renting
6      15      2 Sheltered
```

The treemap visualization, titled 'Mortgage Default by Residency Type', shows the distribution of mortgage defaults by residency type. The largest category is 'Owner Occupier' (blue), followed by 'Private Renting' (green). 'Living With Parents' (yellow) and 'Sheltered' (pink) are smaller categories.

| Residency Type | Count |
|---------------------|-------|
| Owner Occupier | 20 |
| Private Renting | 27 |
| Living With Parents | 9 |
| Sheltered | 15 |

The above treemap figure shows RESIDENCE type “Owner Occupier” has highest rate of default on mortgage.