

Cucumber Report

25-Jun-2022, 4:48:43 pm

Start : Jun 25, 4:48:39.135 pm

End : Jun 25, 4:48:42.649 pm

Duration : 3.514 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

FAILED - 0

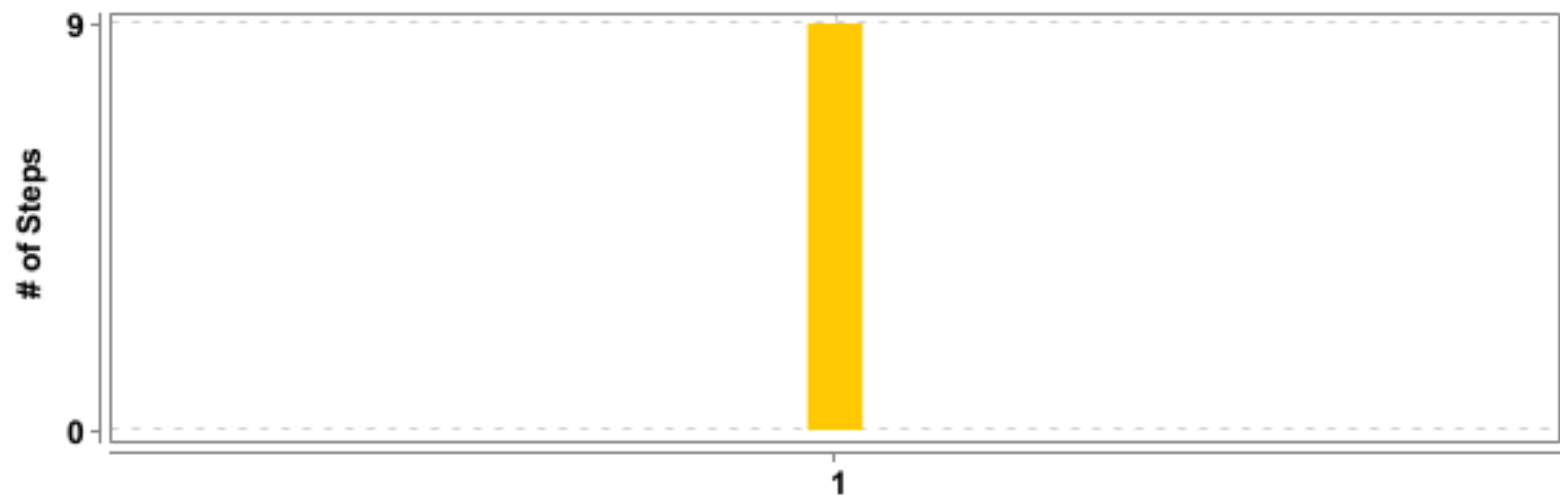
SKIPPED - 9



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Automated End2End Tests</u>	3.514 s	1	0	1	0	9	0	0	9





#	Feature Name	T	P	F	S	Duration
1	<u>Automated End2End Tests</u>	1	0	1	0	3.514 s

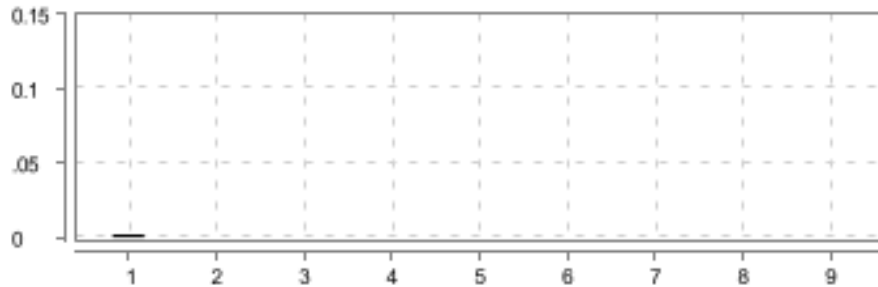



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Automated End2End Tests</u>	<u>Customer place an order by purchasing an item from search</u>	9	0	0	9	3.502 s

Automated End2End Tests

FAILED	DURATION - 3.514 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 9 Pass - 0 Fail - 0 Skip - 9	
/ 4:48:39.135 pm // 4:48:42.649 pm /					

Customer place an order by purchasing an item from search

<div>FAILED</div> <div>DURATION - 3.502 s</div>			<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 9</div>	
/ 4:48:39.147 pm // 4:48:42.649 pm /				
Automated End2End Tests				

#	Step / Hook Details	Status	Duration
	BEFORE - stepDefinitions.Hooks.beforeScenario(io.cucumber.java.Scenario) java.lang.ExceptionInInitializerError at stepDefinitions.Hooks.beforeScenario(Hooks.java:36) Caused by: java.lang.NullPointerException: Cannot invoke "com.aventstack.extentreports.ExtentReports.createTest(String)" because "runners.TestRunner.extent" is null at runners.TestRunner.<clinit>(TestRunner.java:27) at stepDefinitions.Hooks.beforeScenario(Hooks.java:36) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:78) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:567) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)	FAILED	2.934 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.internal.runners.statements.RunAfters.evaluate(RunAfters.java:27) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54)		

#	Step / Hook Details	Status	Duration
1	Given user is on Home Page	SKIPPED	0.002 s
2	When he search for "dress"	SKIPPED	0.000 s
3	And choose to buy the first item	SKIPPED	0.000 s
4	And moves to checkout from mini cart	SKIPPED	0.000 s
5	And enter "Lakshay" personal details on checkout page	SKIPPED	0.000 s
6	And select same delivery address	SKIPPED	0.000 s
7	And select payment method as "check" payment	SKIPPED	0.000 s
8	And place the order	SKIPPED	0.000 s
9	Then verify the order details	SKIPPED	0.000 s