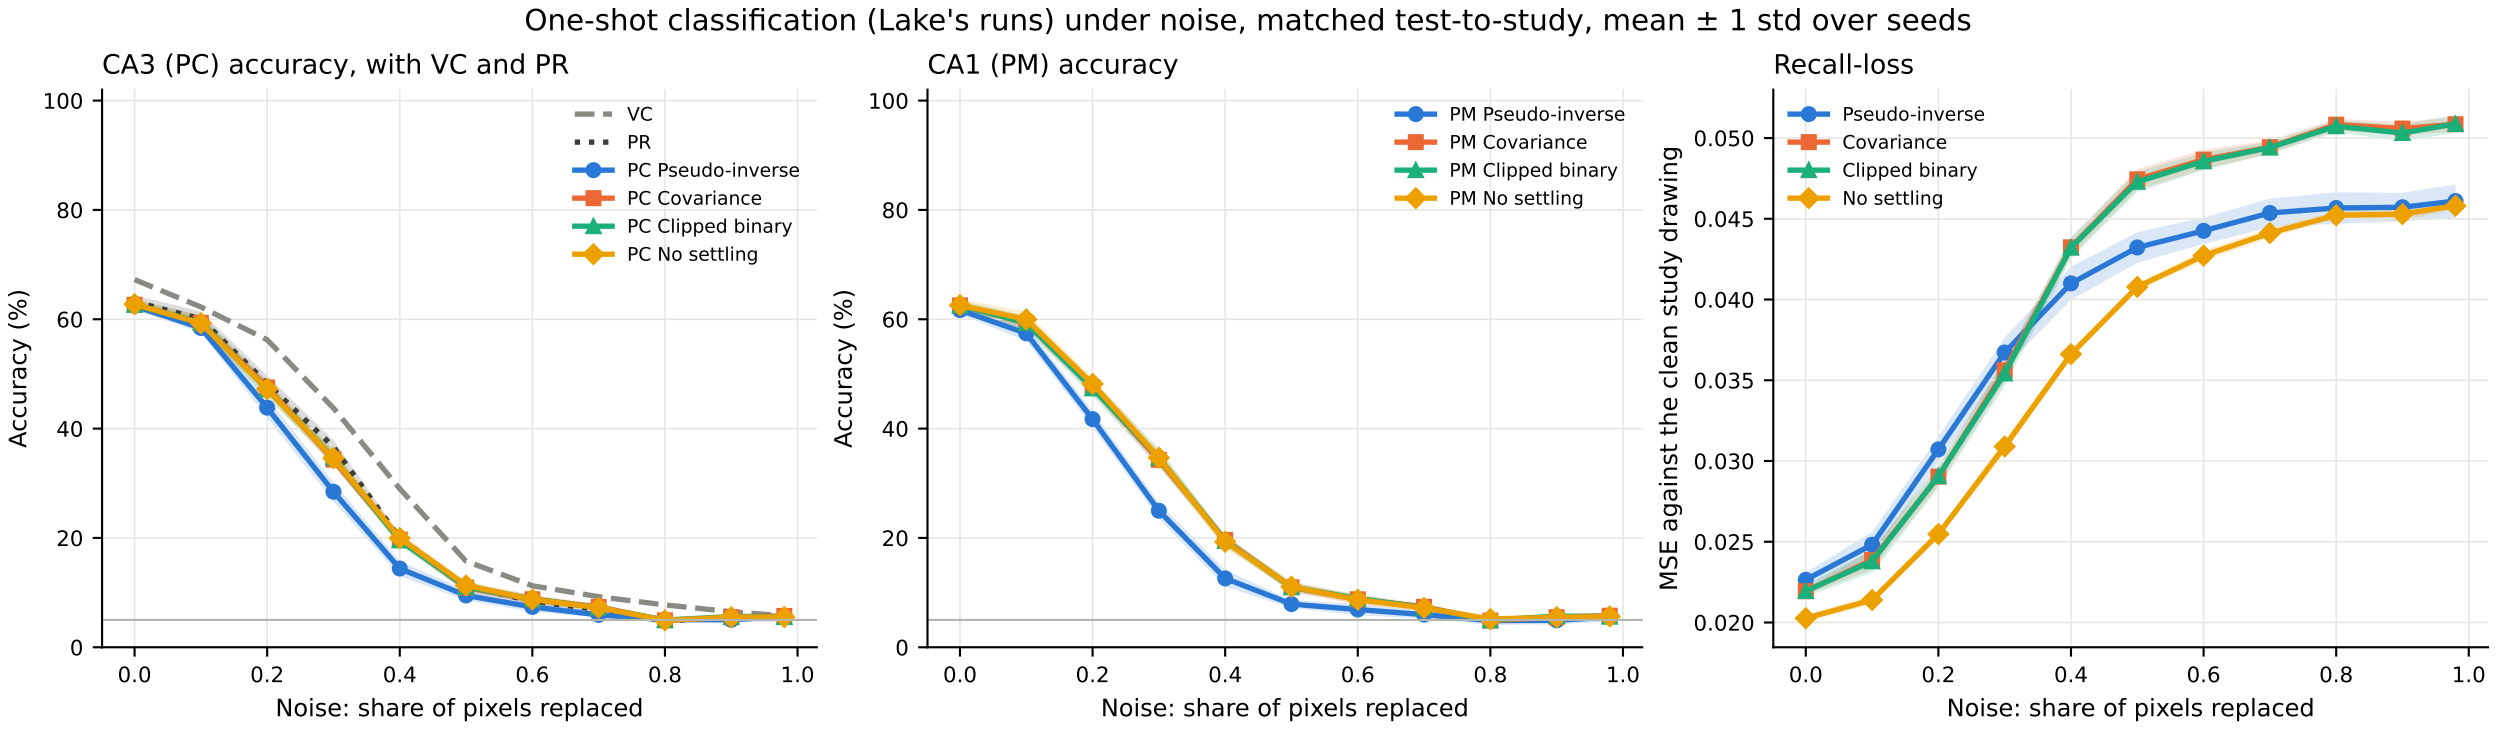
One-shot classification (Lake's runs) under noise, matched test-to-study, mean ± 1 std over seeds
CA3 (PC) accuracy, with VC and PR
Accuracy (%)
Noise: share of pixels replaced
VC
PR
PC Pseudo-inverse
PC Covariance
PC Clipped binary
PC No settling
CA1 (PM) accuracy
Accuracy (%)
Noise: share of pixels replaced
PM Pseudo-inverse
PM Covariance
PM Clipped binary
PM No settling
Recall-loss
MSE against the clean study drawing
Noise: share of pixels replaced
Pseudo-inverse
Covariance
Clipped binary
No settling