Лабораторная работа № 5

Архитектура компьютеров и Операционные системы

Сачковская София Александровна

Содержание

1 Цель работы 5

2 Задание 6

3 Теоретическое введение 7

4 Выводы 12

Список литературы 13

Список иллюстраций

3.1 Установка ПО 8
3.2 Работа с pass 8
3.3 Установка ПО 9
3.4 Установка chezmoi 9
3.5 Применение конфигурации 10
3.6 Проверка изменений 10
3.7 Изменение конфигурации 11

Список таблиц

1 Цель работы

Знакомство с pass, gopass, native messaging, chezmoi. Обучиться использованию данными утилитами, синхронизировать их с гит

2 Задание

1. Установка необходимого ПО
2. Установка и настройка pass
3. Настройка интерфейса с браузером
4. Сохранение пароля
5. Установка и настройка chezmoi
6. Выполнение ежедневных операций с chezmoi

3 Теоретическое введение

Менеджер паролей pass — программа, сделанная в рамках идеологии Unix. Также носит название стандартного менеджера паролей для Unix (The standard Unix password manager). 1.1 Основные свойства Данные хранятся в файловой системе в виде каталогов и файлов. Файлы шифруются с помощью GPG-ключа. 1.2 Структура базы паролей Структура базы может быть произвольной, если Вы собираетесь использовать её напрямую, без промежуточного программного обеспечения. Тогда семантику структуры базы данных Вы держите в своей голове. Если же необходимо использовать дополнительное программное обеспечение, необходимо семантику заложить в структуру базы паролей. chezmoi используется для управления файлами конфигурации домашнего каталога пользователя. Конфигурация chezmoi 2.2.1 Рабочие файлы Состояние файлов конфигурации сохраняется в каталоге ~/.local/share/chezmoi. Он является клоном вашего репозитория dotfiles. Файл конфигурации ~/.config/chezmoi/chezmoi.toml (можно использовать также JSON или YAML) специфичен для локальной машины. Файлы, содержимое которых одинаково на всех ваших машинах, дословно копируются из исходного каталога. Файлы, которые варьируются от машины к машине, выполняются как шаблоны, обычно с использованием данных из файла конфигурации локальной машины для настройки конечного содержимого, специфичного для локальной машины. # Выполнение лабораторной работы

Устанавливаю pass. (рис. [**fig:001**])

```
sasachkovskaya@sasachkovskaya:~$ sudo dnf install pass pass-otp
[sudo] password for sasachkovskaya:
Updating and loading repositories:
 Fedora 43 - aarch64                                    100% | 410.0   B/s |  36.2 KiB |  01m30s
>>> Curl error (28): Timeout was reached for https://mirrors.fedoraproject.org/metalink?repo=fedora-43&arc
>>> Curl error (28): Timeout was reached for https://mirrors.fedoraproject.org/metalink?repo=fedora-43&arc
>>> Curl error (56): Failure when receiving data from the peer for https://mirrors.fedoraproject.org/metal
 Copr repo for rstudio owned by iucar                   100% |   1.3 KiB/s |   2.1 KiB |  00m02s
 Copr repo for gitflow owned by elegos                  100% | 911.0   B/s |   1.5 KiB |  00m02s
 Fedora 43 - aarch64 - Updates                          100% |   5.5 KiB/s |  12.9 KiB |  00m02s
Repositories loaded.
Package                     Arch       Version                    Repository          Size
Installing:
 pass                       noarch     1.7.4-17.fc43              fedora            129.0 KiB
 pass-otp                   noarch     1.2.0-18.fc43              fedora             59.1 KiB
Installing dependencies:
 liboath                    aarch64    2.6.12-3.fc43              fedora             93.7 KiB
 oathtool                   aarch64    2.6.12-3.fc43              fedora            105.9 KiB
 qrencode                   aarch64    4.1.1-11.fc43              fedora             69.6 KiB
```

Рисунок 3.1: Установка ПО

Инициаилизрую pass на машине и делаю первый пароль. (рис. [**fig:002**])

```
sasachkovskaya@sasachkovskaya:~$ pass init 1F5C8944FB5813377F13D6BF5EDBE3BF3F2B9855
mkdir: created directory '/home/sasachkovskaya/.password-store/'
Password store initialized for 1F5C8944FB5813377F13D6BF5EDBE3BF3F2B9855
sasachkovskaya@sasachkovskaya:~$ pass git init
Initialized empty Git repository in /home/sasachkovskaya/.password-store/.git/
[master (root-commit) 0c32fce] Add current contents of password store.
 1 file changed, 1 insertion(+)
 create mode 100644 .gpg-id
[master 1b6a2a0] Configure git repository for gpg file diff.
 1 file changed, 1 insertion(+)
 create mode 100644 .gitattributes
sasachkovskaya@sasachkovskaya:~$ pass git remote add origin git@github.com:sachkovskayasofia/git-repo.git
sasachkovskaya@sasachkovskaya:~$ pass git pull
There is no tracking information for the current branch.
Please specify which branch you want to merge with.
See git-pull(1) for details.

    git pull <remote> <branch>

If you wish to set tracking information for this branch you can do so with:

    git branch --set-upstream-to=origin/<branch> master

sasachkovskaya@sasachkovskaya:~$ ass git push
bash: ass: command not found...
Similar command is: 'as'
sasachkovskaya@sasachkovskaya:~$ pass git push
fatal: The current branch master has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin master

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.
```

Рисунок 3.2: Работа с pass

Устанавливаю дополнительное ПО и шрифты. (рис. [**fig:003**])

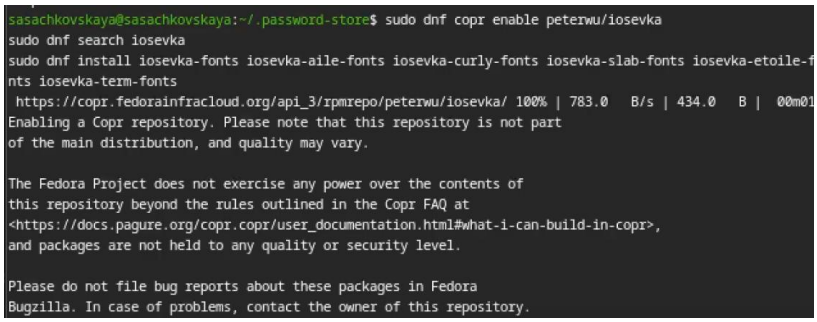

```
sasachkovskaya@sasachkovskaya:~/.password-store$ sudo dnf copr enable peterwu/iosevka
sudo dnf search iosevka
sudo dnf install iosevka-fonts iosevka-aile-fonts iosevka-curly-fonts iosevka-slab-fonts iosevka-etoile-f
nts iosevka-term-fonts
 https://copr.fedorainfracloud.org/api_3/rpmrepo/peterwu/iosevka/ 100% | 783.0   B/s | 434.0   B |  00m01
Enabling a Copr repository. Please note that this repository is not part
of the main distribution, and quality may vary.

The Fedora Project does not exercise any power over the contents of
this repository beyond the rules outlined in the Copr FAQ at
<https://docs.pagure.org/copr.copr/user_documentation.html#what-i-can-build-in-copr>,
and packages are not held to any quality or security level.

Please do not file bug reports about these packages in Fedora
Bugzilla. In case of problems, contact the owner of this repository.
```

Рисунок 3.3: Установка ПО

Инициализирую chezmoi с указанием на указанный в лабораторной работы репозиторий. (рис. [**fig:004**])

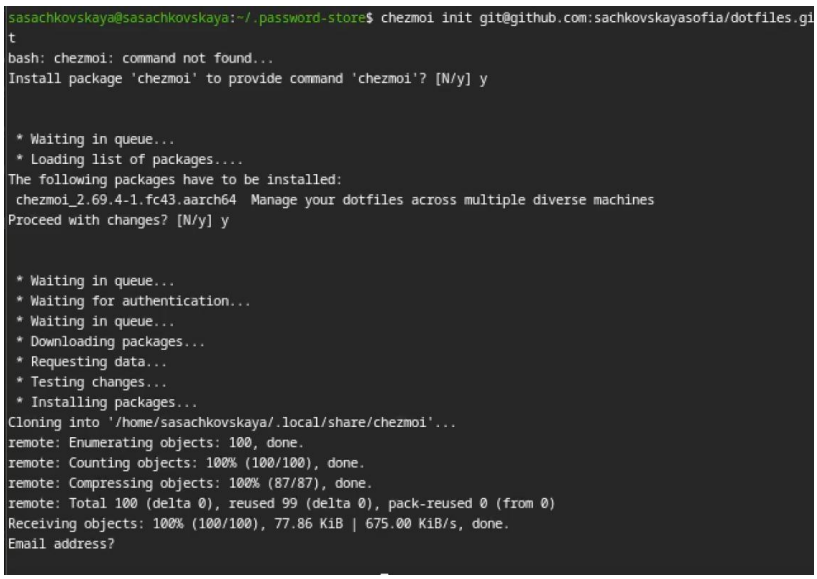

```
sasachkovskaya@sasachkovskaya:~/.password-store$ chezmoi init git@github.com:sachkovskayasofia/dotfiles.gi
t
bash: chezmoi: command not found...
Install package 'chezmoi' to provide command 'chezmoi'? [N/y] y


 * Waiting in queue...
 * Loading list of packages....
The following packages have to be installed:
 chezmoi_2.69.4-1.fc43.aarch64  Manage your dotfiles across multiple diverse machines
Proceed with changes? [N/y] y


 * Waiting in queue...
 * Waiting for authentication...
 * Waiting in queue...
 * Downloading packages...
 * Requesting data...
 * Testing changes...
 * Installing packages...
Cloning into '/home/sasachkovskaya/.local/share/chezmoi'...
remote: Enumerating objects: 100, done.
remote: Counting objects: 100% (100/100), done.
remote: Compressing objects: 100% (87/87), done.
remote: Total 100 (delta 0), reused 99 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (100/100), 77.86 KiB | 675.00 KiB/s, done.
Email address?
```

Рисунок 3.4: Установка chezmoi

Применяю конфиг. (рис. [**fig:005**])

```
new file mode 100755
index 0000000000000000000000000000000000000000..72b0725575f420f31ead55cadf763ef59a7b2336
--- /dev/null
+++ b/.config/sway/other/blocks/calendar
@@ -0,0 +1,40 @@
+#! /bin/sh
+
+width=200
+height=200
+datefmt="+%a %d %H:%M"
+
+OPTIND=1
+for_window [app_id="showmethekey-gtk"] floating enable
+for_window [app_id="showmethekey-gtk"] border none
+for_window [app_id="showmethekey-gtk"] sticky enable
+
+## davmail
+for_window [class="davmail-DavGateway" window_role="DavMail Gateway Settings"] floating enable
+for_window [class="davmail-DavGateway" window_role="DavMail Gateway"] floating enable
+
+# focus, floating, & sticky
+for_window [app_id="(?i)(?:blueman-manager|azote|gnome-disks)"] floating enable
+for_window [app_id="(?i)(?:pavucontrol|nm-connection-editor|gsimplecal|galculator)"] floating enable
+for_window [app_id="(?i)(?:firefox|chromium)"] border none
+for_window [title="(?i)(?:copying|deleting|moving)"] floating enable
+
+popup_during_fullscreen smart
+
+## Sticky window
+
+for_window [instance="file_progress"]  sticky enable
+for_window [class="info|Mate-color-select|gcolor2|timesup|QtPass|GtkFileChooserDialog"] sticky enable
+
+## Teamviewer
+
+for_window [instance="TeamViewer.exe"] floating enable
+for_window [class="TeamViewer"] floating enable
+#for_window [instance="Qt-subapplication" title="TeamViewer"] move scratchpad
+
+## Focus window settings
+
+no_focus [window_role="pop-up"]
+focus_on_window_activation focus
+#for_window [class="(?i)"] focus
+
```

Рисунок 3.5: Применение конфигурации

Проверяю изменения в удаленном репозитории (рис. [**fig:006**])

```
sasachkovskaya@sasachkovskaya:~$ chezmoi update
Already up to date.
sasachkovskaya@sasachkovskaya:~$ git pull --autostash --rebase
fatal: not a git repository (or any parent up to mount point /)
Stopping at filesystem boundary (GIT_DISCOVERY_ACROSS_FILESYSTEM not set).
sasachkovskaya@sasachkovskaya:~$ chezmoi apply
sasachkovskaya@sasachkovskaya:~$ chezmoi git pull -- --autostash --rebase && chezmoi diff
Already up to date.
sasachkovskaya@sasachkovskaya:~$ git pull --autostash --rebase
fatal: not a git repository (or any parent up to mount point /)
Stopping at filesystem boundary (GIT_DISCOVERY_ACROSS_FILESYSTEM not set).
sasachkovskaya@sasachkovskaya:~$ chezmoi diff
sasachkovskaya@sasachkovskaya:~$ chezmoi apply
```

Рисунок 3.6: Проверка изменений

Отключаю автоматические сохранение изменений. (рис. [**fig:007**])

Рисунок 3.7: Изменение конфигурации

4 Выводы

Я познакомилась с pass, gopass, native messaging, chezmoi. Научилась использованию данными утилитами, синхронизировала их с гит.

Список литературы