Conflux V2 versus Moshpit at 900 simulated seconds

Uniform hardware · IID
Moshpit: 56.37 ± 0.76%

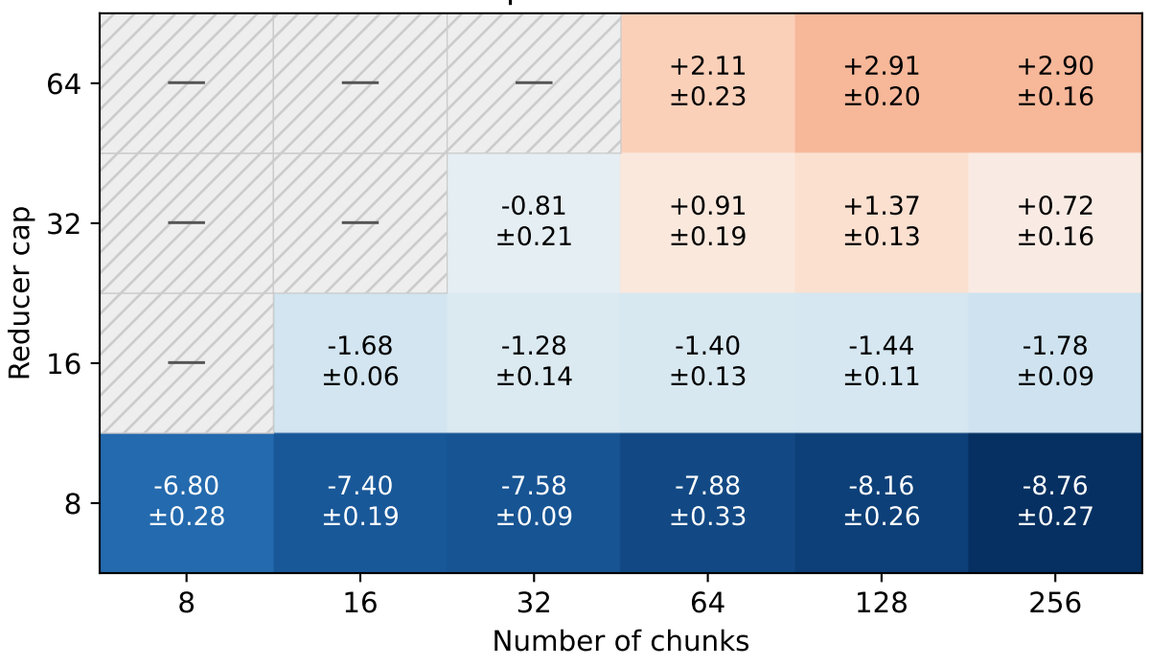

Heterogeneous hardware · IID
Moshpit: 44.83 ± 0.53%

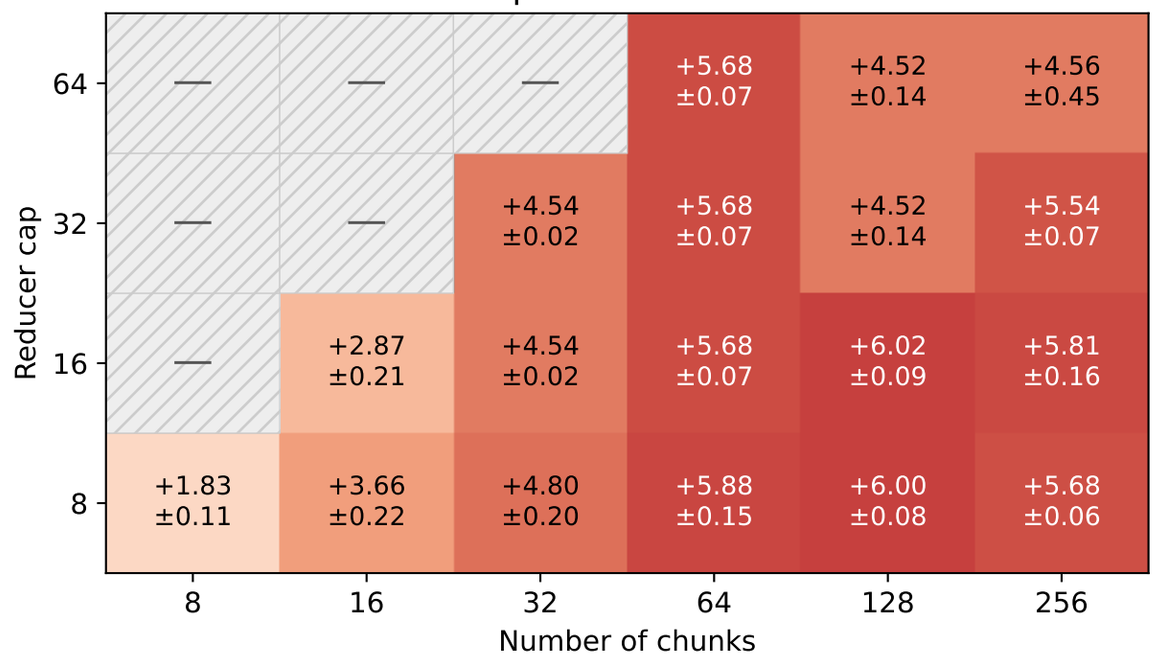

Uniform hardware · Non-IID (α=0.1)
Moshpit: 40.50 ± 0.55%

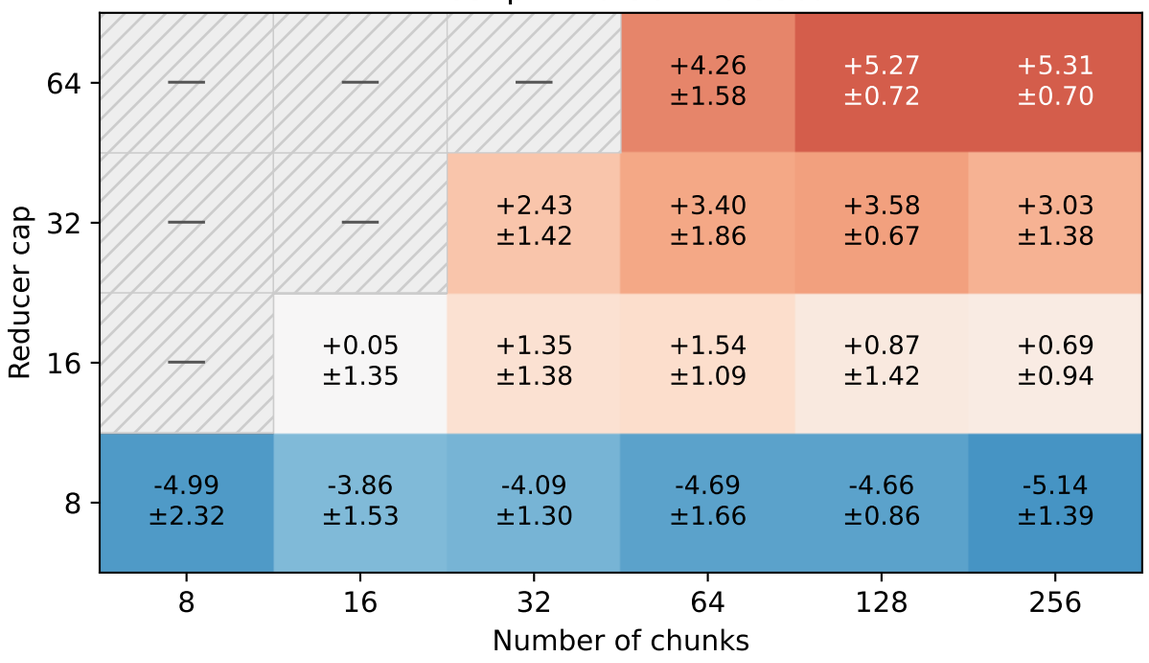

Heterogeneous hardware · Non-IID (α=0.1)
Moshpit: 29.04 ± 2.48%

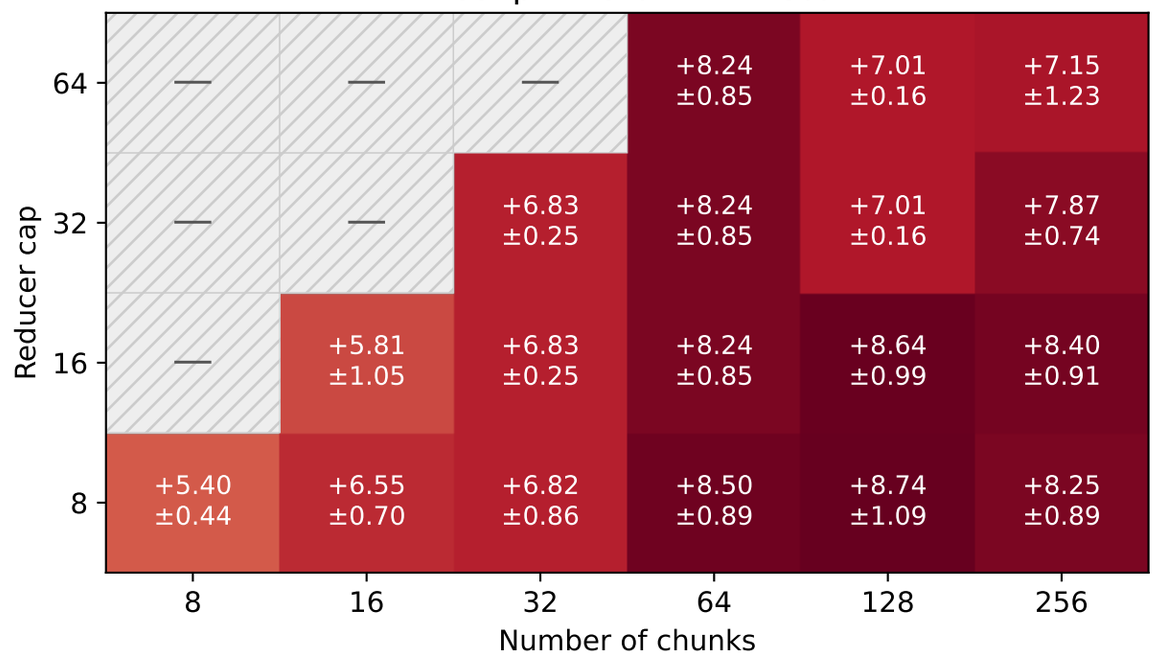

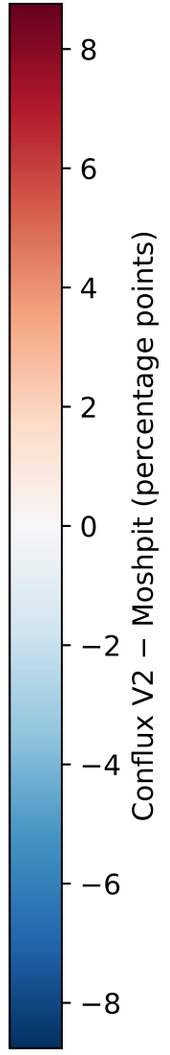

64 nodes · 16 V2 trainers · CIFAR-10 / GNLeNet · three paired seeds (mean ± sample SD)
— / hatched: omitted because reducer cap > chunks; these cells are redundant, not failed runs.
A reducer cap can exceed the number actually used on heterogeneous hardware.